

**BILL OF QUANTITY (BOQ)**

NW- Upgradation of Infrastructure in Dumurudhi U.G.U.P. School.

Amount put to Tender:- Rs 893964.00

Cost of Tender Paper:- Rs 4000.00 (Four thousand only)

Class of Contractor:- D' &amp; 'C' Class

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	2	3	4	5	6
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer in charge.	Cum	42.68	184.60	7861.00
2	Filling foundation & plinth with coarse sand well watered and rammed as per the direction of Engineer in charge etc complete as per direction of Engineer in charge.	Cum	58.67	744.40	43674.00
3	P.C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer in charge.	Cum	16.02	4735.04	75851.00
4	R.C.C M-20 using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of Engineer in charge.				
	A- Footing	Cum	4.98	5148.30	25661.00
	B- Plinth beam	Cum	3.80	5505.53	20896.00
	C- Column & Wall Beam	Cum	5.27	10787.80	56868.00
	D- Lintel & Sill band	Cum	2.11	8685.80	18296.00
	E- Roof slab	Cum	11.16	9247.40	103217.00
5	Straightening, cutting, bending, binding of M.S rod or Tor steel, tying up the grills and placing in position including cost of binding wire with all cost conveyance, taxes etc completed in all respect as per the direction of Engineer in charge.	Qntl	24.84	7451.40	185060.00
6	Fly ash brick massonary with cement mortar (1:6) in foundation and plinth including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	Cum	15.67	4351.60	68181.00
7	Brick work with Fly ash brick with cement mortar (1:6) in superstructure including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	Cum	23.50	4384.90	103039.00
8	Providing 20 mm thick grading plaster (1:4) over roof slab including cost, conveyance, royalty, curing all etc complete	Sqm	63.03	233.48	14715.00
9	12mm thick cement plaster with cement mortar (1:6) including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge. (External walls)	Sqm	163.18	146.50	23905.00
10	16mm thick cement plaster with cement mortar (1:6) including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge. (Internal walls)	Sqm	101.88	222.20	22637.00
11	25mm thick A.S flooring with C.C (1:2:4) including punning using 12mm size H.G.C.B chips including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge.	Sqm	61.07	310.01	18932.00
12	Fixing Ceramic Tiles in floors, treads or steps and landing on 25mm thick bed of cement mortar 1:1 (1 cement : 1 sand) jointed with neat cement slury mixed with pigment to match the shades of the tiles including rubbing and polishing complete including cost of tiles	Sqm	6.63	1017.44	6748.00
13	Fixing glazed tiles in dados skirting and risers of steps on 12mm.thick cement plaster (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including rubbing and polishing complete including cost of tiles.	Sqm	12.68	1075.32	13636.00
14	Cement washing one coat with cost of all materials and labour	Sqm	194.60	15.02	2923.00

15	Priming 1coat with water bound wall cement primer over plastered surface.	Sqm	83.13	58.02	4823.00
16	Supplying,fitting and fixing MS Grills,Doors and Windows made out of structural steel flat etc as per direction of Engineer in charge.	Kg	465.61	133.30	62066.00
17	Finishing wall with water proofing cement paint of approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc complete as per direction of Engineer in charge.	Sqm	277.73	32.30	8971.00
18	Painting two coats over a coat of primer on new iron work & wood work with all cost of material & labour,T & P etc complete as per direction of Engineer in charge.	Sqm	32.12	186.90	6004.00
<b>Total Rs</b>					<b>893964.00</b>

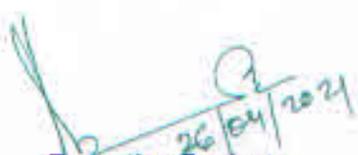
Total 18 (Eighteen) nos item only.

Approved for 18(Eighteen) items only

GST-12% will be added at the time of Agreement over the quoted amonut.

  
Asst.Exe. Engineer  
Banspal Block.

  
B.D.O.  
Banspal.

  
Executive Engineer  
DRDA Keonjhar

**TO BE FILLED BY THE TENDERER**

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

Excess in Percentage

Less in Percentage

In Figure	In words
%	
%	
%	

**Notes:-**

- 1) The Tenderer should quote the percentage up to **two decimal point** only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose
- 4) The percentage quoted at any other place will not be taken into consideration.

  
Block Development Officer  
Banspal.