

BILL OF QUANTITY (BOQ)

NAME OF THE WORK: - Construction of Additional classroom and boundary wall at Brajabandhu UP School for the year 2020-21

Amount put to Tender	:	Rs. 1,790,922.00
Class of Contractor	:	D' & C' class only
Cost of Tender Paper	:	Rs.6000.00
Date required for completion	:	3(Three) calendar Month

Sl. no.	Item of Work	Quantity	Unit	Rate	Amount
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads, lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth . as per direction of Engineer-in-charge	129.74	cum	182.80	23716.69
2	Supplying, filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty and all taxces of materials cost of all labour with T&P etc. complete. as per direction of Engineer-in-charge	55.29	cum	322.84	17848.95
3	P.C.C (1:3:6) in foundation and plinth using 25mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer incharge.	25.21	cum	4782.94	120555.6
4	R.C.C (M20) using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of Engineer incharge.				
a	Footing	7.22	Cum	5408.22	39071.19
b	Plinth beam	11.23	Cum	5717.50	64155.58
c	Column & Wall Beam	3.62	Cum	11625.58	42114.36
d	Lintel & Sill band	1.60	Cum	10116.31	16158.96
e	Roof slab	7.10	Cum	10043.20	71347.53
f	Chajja	10.72	Cum	867.35	9295.77
5	Straightening, cutting, bending, binding of M.S rod or Tor steel, tying up the grills and placing in position including cost of binding wire with all cost conveyance, taxes etc completed in all respect as per the direction of Engineer in charge.	29.07	Qntl	7582.30	220376.38


6	Fly ash brick masonry with cement mortar (1:6) in foundation and plinth including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	83.54	Cum	4316.60	360593.07
7	Brick work with Fly ash brick with cement mortar (1:6) in superstructure including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	103.75	Cum	4354.55	451756.33
8	Providing 20 mm thick grading plaster (1:4) over roof slab including cost, conveyance, royalty, curing all etc complete	63.03	Sqm	219.89	13858.33
9	12 mm thick cement plaster in C.M.(1:6) in external surface of wall including cost, conveyance etc as per direction of Engineer-in-charge	159.56	Sqm	139.59	22273.01
10	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost, conveyance etc as per direction of Engineer-in-charge	806.24	Sqm	197.89	159547.46
11	12mm thick cement plaster with cement mortar (1:6) cement punning for dadoes and skirting including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge.	7.62	Sqm	163.51	1245.59
12	Fixing tiles (vetrified tiles 600mm x 600mm) in floors, treads or steps and landing on 20mm thicks bed of CM 1:4 jointed with neat cement slury mixed with pigment to match the shade of the tiles including rubing and polishing with cost conveyance of all materials etc complete.	52.73	Sqm	953.25	50261.07
13	Priming one coat with approved wall primer including all cost, taxes etc complete as per direction of Engineer in charge.	223.19	Sqm	59.08	13185.83
14	Finishing wall with weatner coat paint or approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc	223.19	Sqm	72.85	16259.07
15	Supplying, fitting and fixing MS Grills, Doors and Windows made out of structural steel flat etc as per direction of Engineer in charge.	356.88	KG	132.29	47210.19
16	Priming one coat on new iron work & wood work with all cost of material & labour T & P etc complete as per direction of Engineer in charge.	23.97	Sqm	54.46	1305.30

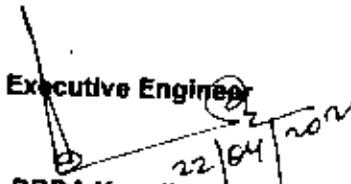
17	Painting two coats with any approved on new wood work / iron work with all cost, of materials and labour, T & P etc completed as per direction of Engineer in charge.	23.97	Sqm	138.36	3316.17
18	Finishing wall with water proof cement paint of approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc complete as per direction of Engineer in charge.	735.00	Sqm	34.65	25489.99
Total					1790922

TOTAL 18 NOS ITEM ONLY

(Seveteen lakhs Ninety thousand nine hounded twenty two

Approved for 18 items only


Assistant Engineer
Ghasipura Block


Executive Engineer
DRDA Keonjhar
 22/04/2024

TO BE FILLED BY THE TENDERER

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

Excess in Percentage

Less in Percentage

in Figure

	%
	%
	%

In words

Notes:-

- 1) The Tenderer should quote the percentage up to one decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

Executive Engineer
DRDA Keonjhar

Block Development Officer
Excess in Percentage

42

ORIGINAL

BILL OF QUANTITY (BOQ)

NAME OF THE WORK: - Construction of Additional classroom and Toilet at Nandabara UGUP School for the year 2020-21

Amount put to Tender : Rs. 904,090.00
 Class of Contractor : D' & C' class only
 Cost of Tender Paper : Rs. ^{4000.00} ~~4000.00~~
 Date required for completion : 3(Three) calendar Month

Sl. no.	Item of Work	Quantity	Unit	Rate	Amount
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads, lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth as per direction of Engineer-in-charge	55.27	cum	182.80	10102.96
2	Supplying, filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty and all taxes of materials cost of all labour with T&P etc. complete. as per direction of Engineer-in-charge	45.81	cum	410.84	18820.76
3	P.C.C (1:3:6) in foundation and plinth using 25mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer incharge.	10.21	cum	4721.85	48188.06
4	P.C.C (1:4:8) in foundation and plinth using 40mm H.G.H.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer incharge.	3.17	cum	4128.41	13092.99
5	R.C.C (M20) using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of Engineer incharge.				
a	Footing	7.22	Cum	5340.04	38578.59
b	Plinth beam	2.72	Cum	5649.32	15350.05
c	Column & Wall Beam	3.62	Cum	11557.39	41867.35
d	Lintel & Sill band	2.05	Cum	10048.12	20586.11
e	Roof slab	9.45	Cum	9975.02	94326.66
f	Chajja	10.72	Cum	862.91	9248.27

6	Straightening, cutting, bending, binding of M.S rod or Tor steel, tying up the grills and placing in position including cost of binding wire with all cost conveyance, taxes etc completed in all respect as per the direction of Engineer in charge.	24.3	Qntl	7573.66	184017.81
7	Fly ash brick masonry with cement mortar (1:6) in foundation and plinth including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	15.37	Cum	4266.38	65565.74
8	Brick work with Fly ash brick with cement mortar (1:6) in superstructure including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	22.70	Cum	4304.33	97701.58
9	Providing 20 mm thick grading plaster (1:4) over roof slab including cost, conveyance, royalty, curing all etc complete	63.03	Sqm	221.30	13947.30
10	12 mm thick cement plaster in C.M.(1:6) in external surface of wall including cost, conveyance etc as per direction of Engineer-in-charge	214.56	Sqm	140.61	30168.87
11	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost, conveyance etc as per direction of Engineer-in-charge	128.05	Sqm	199.12	25497.99
12	12mm thick cement plaster with cement mortar (1:6) cement punning for dadoes and skirting including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge.	7.62	Sqm	164.30	1251.60
13	Fixing tiles (vetrified tiles 600mm x 600mm) in floors, treads or steps and landing on 20mm thicks bed of CM 1:4 jointed with neat cement slury mixed with pigment to match the shade of the tiles including rubing and polishing with cost conveyance of all materials etc complete.	62.77	Sqm	954.15	59888.26
14	Fixing vetrified tiles in wall, skirting & risers of steps on 12 mm thick cement plaster (1:3) ratio jointed with neat cement slury mixed with pigments to match the shade of tiles including rubbing & polishing complet as dirction of engg. In charge.	13.56	Sqm	964.51	13082.07
15	25mm thick A.S flooring with C.C (1:2:4) including punning using 12mm size H.G.C.B chips including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge.	8.67	Sqm	308.20	2673.58

16	Cement washing 1 coat with shell lime on slacked & cement including all cost, taxes etc complete as per direction of Engineer in charge.	98.24	Sqm	16.03	1574.77
17	Finishing wall with water proofing cement paint of approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc complete as per direction of Engineer in charge.	98.24	Sqm	32.71	3213.95
18	Priming one coat with approved wall primer including all cost, taxes etc complete as per direction of Engineer in charge.	223.19	Sqm	59.08	13185.83
19	Finishing wall with weather coat paint of approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc	223.19	Sqm	72.85	16259.07
20	Supplying, fitting and fixing MS Grills, Doors and Windows made out of structural steel flat etc as per direction of Engineer in charge.	447.49	KG	132.29	59197.15
21	Priming one coat on new iron work & wood work with all cost of material & labour T & P etc complete as per direction of Engineer in charge.	34.84	Sqm	54.46	1882.02
22	Painting two coats with any approved on new wood work / iron work with all cost, of materials and labour, T & P etc completed as per direction of Engineer in charge.	34.84	Sqm	138.36	4820.61
Total					904090.00

TOTAL 22 NOS ITEM ONLY

(Nine lakhs four thousand ninety) ONLY

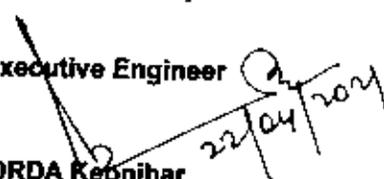

Assistant Engineer

Ghasipura Block

Approved for 22 items only

Executive Engineer

DRDA Keonjhar


22/04/2024

TO BE FILLED BY THE TENDERER

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

Excess in Percentage

Less in Percentage

in Figure

	%
	%
	%

In words

Notes:-

- 1) The Tenderer should quote the percentage up to one decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

Executive Engineer
DRDA Keonjhar

Block Development Officer
Excess in Percentage

39

ORIGINAL

BILL OF QUANTITY (BOQ)

NAME OF THE WORK: - Construction of additional class room and Toilet at Angara NUPS for the year 2020-21

Amount put to Tender	:	16,05,145.77 Rs. 16,005,145.69
Class of Contractor	:	D' & C' class only
Cost of Tender Paper	:	Rs. 6000.00
Date required for completion	:	3(Three) calendar Month

Sl. no.	Item of Work	Quantity	Unit	Rate	Amount
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads, lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth, as per direction of Engineer-in-charge	92.36	cum	182.80	16882.48
2	Supplying, filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty and all taxes of materials cost of all labour with T&P etc. complete, as per direction of Engineer-in-charge	92.61	cum	410.84	38050.34
3	C.C (1:4:8) using 40 mm bg metal in foundation with 40 mm size hard Broken metal including cost conveyance royalty etc complete as per direction of Engineer-in-charge	23.40	Cum	4128.41	96615.15
4	R.C.C (M20) using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of Engineer incharge.				
a	Footing	13.22	Cum	5340.04	70606.90
b	Plinth beam	5.30	Cum	5649.32	29938.42
c	Column & Wall Beam	8.83	Cum	11557.39	102104.10
d	Lintel & Sill band	2.83	Cum	10048.12	28456.87
e	Roof slab	16.04	Cum	9975.02	159998.50
f	Chajja	16.65	Cum	862.91	14367.53
5	Straightening bent up or coiled M.S. rod or HYSD steel (Fe- 415), cutting, bending, cracking, hooking, welding or jointing (if required), the M.S rod or HYSD steel and binding, tying the gnlts, hoisting, lowering and placing in proper position as require	45.40	Qnt	7573.66	343809.93
6	Fly ash brick masonry with cement mortar (1:6) in foundation and plinth including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	30.62	Cum	4266.38	130652.98
7	Brick work with Fly ash brick with cement mortar (1:6) in superstructure including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	37.60	Cum	4304.33	161870.48


8	Providing 20 mm thick grading plaster (1:4) over roof slab including cost, conveyance, royalty, curing all etc complete	121.40	Sqm	221.30	26865.24
9	12 mm thick cement plaster in C.M.(1:6) in external surface of wall including cost, conveyance etc. as per direction of Engineer-in-charge	283.71	Sqm	140.61	39891.95
10	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost, conveyance etc. as per direction of Engineer-in-charge	248.39	Sqm	199.12	49458.95
11	Fixing tiles (vetrified tiles 600mm x 600mm) in floors, treads or steps and landing on 20mm thick bed of CM 1:4 jointed with neat cement slury mixed with pigment to match the shade of the tiles including rubbing and polishing with cost conveyance of all materials etc complete	113.45	Sqm	954.15	108248.01
12	12mm thick cement plaster with cement mortar (1:6) cement punning for dadoes and skirting including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge.	15.31	Sqm	164.30	2515.88
13	Fixing vetrified tiles in wall, skirting & risers of steps on 12 mm thick cement plaster (1:3) ratio jointed with neat cement slury mixed with pigments to match the shade of tiles including rubbing & polishing complet as dircetion of engg.	13.56	Sqm	964.51	13082.07
14	Priming one coat with approved wall primer including all cost, taxes etc complete as per direction of Engineer in charge.	397.98	Sqm	59.08	23512.70
15	Finishing wall with weather coat paint of approved shade on new work (two coats) to give an even shade including cost of cement pant, including all cost, taxes etc complete as per direction of Engineer in charge.	397.98	Sqm	72.85	28992.65
16	25mm thick A.S flooring with C.C (1:2:4) including punning using 12mm size H.G.C.B chips including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge.	8.67	Sqm	308.20	2673.58
17	Cement washing 1 coat with shell lime on stacked & cement including all cost, taxes etc complete as per direction of Engineer in charge	98.24	Sqm	16.03	1574.77
18	Finishing wall with water proofing cement paint of approved shade on new work (two coats) to give an even shade including cost of cement paint,	98.24	Sqm	32.71	3213.95
19	Supplying, fitting and fixing iron grills, doors and windows made out of structural steel flat etc as per direction of Engineer in charge.	759.75	KG	132.29	100506.07
20	Priming one coat on new iron work & wood work with all cost of material & labour T & P etc complete as per direction of Engineer in charge.	58.81	Sqm	53.04	3119.20
21	Painting two coats with any approved on new wood work / iron work with all cost, of materials and labour, T & P etc completed as per direction of Engineer in charge.	58.81	Sqm	138.36	8136.78

Total


1605145

(Sixteen lakhs five thousand one hundred forty five jony)

TOTAL 21 (TWENTYONE) NOS (ITEM ONLY)


Assistant Engineer
Ghaslpura Block

Approved for 21 (Twentyone) items only


Executive Engineer
DRDA Keonjhar

TO BE FILLED BY THE TENDERER

1) My/ Our quoted rate is (both in figure and words)


	in Figure	In words
Equal to Estimate Cost	%	
Excess in Percentage	%	
Less in Percentage	%	

Notes:-

- 1) The Tenderer should quote the percentage up to one decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quoted their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

**Executive Engineer
DRDA Keonjhar**

**Block Development Officer
Ghasipura Block**



36

ORIGINAL

BILL OF QUANTITY (BOQ)

NAME OF THE WORK: CONSTRUCTION OF ADDITIONAL CLASSROOM, TOILET AND BOUNDARY WALL AT BADAPADANA UGUP.

Amount put to Tender : Rs. 1,340,449.00
 Class of Contractor : D' & C' class only
 Cost of Tender Paper : Rs. 6000.00
 Date required for completion : 3(Three) calendar Month

Sl. no.	Item of Work	Quantity	Unit	Rate	Amount
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads, lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth. as per direction of Engineer-in-charge	91.27	cum	182.80	16683.65
2	Supplying, filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty and all taxes of materials cost of all labour with T&P etc. complete. as per direction of Engineer-in-charge	51.81	cum	366.84	19006.12
3	P.C.C (1:3:6) in foundation and plinth using 25mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer incharge.	16.21	cum	4700.73	76176.90
4	C.C (1:4:8) using 40 mm hg metal in foundation with 40 mm size hand Broken metal including cost, conveyance, royalty etc complete as per direction of Engineer-in-charge	3.17	Cum	4107.29	13026.01
5	R.C.C (M20) using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of Engineer incharge.				
a	Footing	7.22	Cum	5320.24	38435.54
b	Plinth beam	6.47	Cum	5629.52	36406.94
c	Column & Wall Beam	3.62	Cum	11537.59	41795.63
d	Lintel & Sill band	2.05	Cum	10028.32	20545.55
e	Roof slab	9.45	Cum	9955.22	94139.43
f	Chajja	10.72	Cum	861.63	9234.47

6	Straightening bent up or coiled M.S. rod or HYSD steel (Fe-415), cutting, bending, cracking, hooking, welding or jointing (if required), the M.S rod or HYSD steel and binding, tying the grills, hoisting, lowering and placing in proper position as require	27.68	Qntl	7573.66	209578.90
7	Fly ash brick massonary with cement mortar (1:6) in foundation and plinth including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	45.37	Cum	4254.06	192998.11
8	Brick work with Fly ash brick with cement mortar (1:6) in superstructure including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	59.95	Cum	4292.01	257309.45
9	Providing 20 mm thick grading plaster (1:4) over roof slab including cost, conveyance, royalty, curing all etc complete	63.03	Sqm	220.29	13883.52
10	12 mm thick cement plaster in C.M.(1:6) in external surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	214.56	Sqm	139.95	30027.26
11	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	426.05	Sqm	198.33	84499.16
12	Fixing tiles (vetrifed tiles 600mm x 600mm) in floors , treads or steps and landing on 20mm thicks bed of CM 1:4 jointed with neat cement slury mixed with pigment to match the shade of the tiles including rubing and polishing with cost conveyance of all materials etc complete.	62.77	Sqm	953.23	59830.26
13	12mm thick cement plaster with cement mortar (1:6) cement punning for dadoes and skirting including cost, conveyence, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge.	7.62	Sqm	163.64	1246.58
14	Fixing vetrified tiles in wall, skirting & risers of steps on 12 mm thick cement plaster (1:3) ratio jointed with neat cement slury mixed with pigments to match the shade of tiles including rubbing & polishing complet as dirction of engg. in charge.	13.56	Sqm	963.94	13074.31
15	Priming one coat with approved wall primer including all cost, taxes etc complete as per direction of Engineer in charge.	223.19	Sqm	59.08	13185.83
16	Finishing wall with weather coat paint of approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc complete as per direction of Engineer in charge.	223.19	Sqm	72.85	16259.07
17	25mm thick A.S flooring with C.C (1:2:4) including punning using 12mm size H.G.C.B chips including cost, conveyence, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge.	8.67	Sqm	307.68	2669.00

18	Cement washing 1 coat with shell lime on slacked & cement including all cost, taxes etc complete as per direction of Engineer in charge.	98.24	Sqm	16.03	1574.77
19	Finishing wall with water proofing cement paint of approved shade on new work (two coats) to give an even shade including cost of cement paint.	396.24	Sqm	32.71	12962.74
20	Supplying, fitting and fixing MS Grills, Doors and Windows made out of structural steel flat etc as per direction of Engineer in charge.	447.49	KG	132.29	59197.15
21	Priming one coat on new iron work & wood work with all cost of material & labour T & P etc complete as per direction of Engineer in charge.	34.84	Sqm	54.46	1882.02
22	Painting two coats with any approved on new wood work / iron work with all cost, of materials and labour, T & P etc completed as per direction of Engineer in charge.	34.84	Sqm	138.36	4820.61

Total

1340448.98

Total

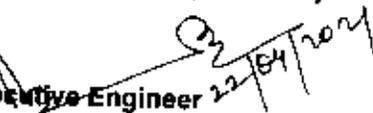
1340449.00

(Thirteen lakh forty thousand four hundred forty nine)

TOTAL 22 (TWENTYTWO) NOS ITEM ONLY


Assistant Engineer
Ghasipura Block

Approved for 22 (Twentytwo) items only


Executive Engineer 22/04/2024
DRDA Keonjhar

TO BE FILLED BY THE TENDERER

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost
Excess in Percentage
Less in Percentage

In Figure	
	%
	%
	%

In words

Notes:-

- 1) The Tenderer should quote the percentage up to one decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

Executive Engineer
DRDA Keonjhar

Block Development Officer
Ghasipura Block

33

ORIGINAL

BILL OF QUANTITY (BOQ)

NAME OF THE WORK: - Construction of Additional classroom and Toilet at Baripal UGUP School for the year 2020-21

Amount put to Tender : Rs. 904,101.00
 Class of Contractor : D' & C' class only
 Cost of Tender Paper : ~~Rs. 5000.00~~
 Date required for completion : 3(Three) calendar Month

Sl. no.	Item of Work	Quantity	Unit	Rate	Amount
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads, lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth as per direction of Engineer-in-charge	55.27	cum	182.80	10102.96
2	Supplying, filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty and all taxes of materials cost of all labour with T&P etc. complete. as per direction of Engineer-in-charge	45.81	cum	410.84	18820.76
3	P.C.C (1:3:6) in foundation and plinth using 25mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer incharge.	10.21	cum	4721.85	48188.06
4	P.C.C (1:4:8) in foundation and plinth using 40mm H.G.H.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer incharge.	3.17	cum	4128.41	13092.99
5	R.C.C (M20) using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of Engineer incharge.				
a	Footing	7.22	Cum	5340.04	38578.59
b	Plinth beam	2.72	Cum	5649.32	15350.05
c	Column & Wall Beam	3.62	Cum	11557.39	41867.35
d	Lintel & Sill band	2.05	Cum	10048.12	20586.11
e	Roof slab	9.45	Cum	9975.02	94326.66
f	Chajja	10.72	Cum	862.91	9248.27
6	Straightening, cutting, bending, binding of M.S rod or Tor steel, tying up the grills and placing in position including cost of binding wire with all cost conveyance, taxes etc completed in all respect as per the direction of Engineer in charge.	24.3	Qntl	7573.66	184017.81

7	Fly ash brick masonry with cement mortar (1:6) in foundation and plinth including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	15.37	Cum	4266.38	65565.74
8	Brick work with Fly ash brick with cement mortar (1:6) in superstructure including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	22.70	Cum	4304.33	97711.87
9	Providing 20 mm thick grading plaster (1:4) over roof slab including cost, conveyance, royalty, curing all etc complete	63.03	Sqm	221.30	13947.30
10	12 mm thick cement plaster in C.M.(1:6) in external surface of wall including cost, conveyance etc as per direction of Engineer-in-charge	214.56	Sqm	140.61	30168.87
11	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost, conveyance etc as per direction of Engineer-in-charge	128.05	Sqm	199.12	25497.99
12	12mm thick cement plaster with cement mortar (1:6) cement punning for dadoes and skirting including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge.	7.62	Sqm	164.30	1251.60
13	Fixing tiles (vetrified tiles 600mm x 600mm) in floors, treads or steps and landing on 20mm thicks bed of CM 1:4 jointed with neat cement slury mixed with pigment to match the shade of the tiles including rubing and polishing with cost conveyance of all materials etc complete.	62.77	Sqm	954.15	59888.26
14	Priming one coat with approved wall primer including all cost, taxes etc complete as per direction of Engineer in charge.	223.19	Sqm	59.08	13185.83
15	Finishing wall with weather coat paint or approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc complete	223.19	Sqm	72.85	16259.07
16	Fixing vetrified tiles in wall, skirting & risers of steps on 12 mm thick cement plaster (1:3) ratio jointed with neat cement slury mixed with pigments to match the shade of tiles including rubbing & polishing complet as dirction of engg. In charge.	13.56	Sqm	964.51	13082.07
17	25mm thick A.S flooring with C.C (1:2:4) including punning using 12mm size H.G.C.B chips including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge.	8.67	Sqm	308.20	2673.58

18	Cement washing 1 coat with shell lime on slacked & cement including all cost, taxes etc complete as per direction of Engineer in charge.	98.24	Sqm	16.03	1574.77
19	Finishing wall with water proofing cement paint of approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc complete as per direction of Engineer in charge.	98.24	Sqm	32.71	3213.95
20	Supplying, fitting and fixing MS Grills, Doors and Windows made out of structural steel flat etc as per direction of Engineer in charge.	447.49	KG	132.29	59197.15
21	Priming one coat on new iron work & wood work with all cost of material & labour T & P etc complete as per direction of Engineer in charge.	34.84	Sqm	54.46	1882.02
22	Painting two coats with any approved on new wood work / iron work with all cost, of materials and labour, T & P etc completed as per direction of Engineer in charge.	34.84	Sqm	138.36	4820.61

Total

904100.29

Total

904101.00

TOTAL 22 NOS ITEM ONLY

(Nine lakh four thousand one hundred one)

[Signature]
Assistant Engineer
Ghasipura Block

Approved for 22 items only

[Signature]
Executive Engineer
DRDA Keonjhar

22/04/2024

TO BE FILLED BY THE TENDERER

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

Excess in Percentage

Less in Percentage

in Figure

	%
	%
	%

In words

Notes:-

- 1) The Tenderer should quote the percentage up to one decimal point only.
tendering .
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

Executive Engineer
DRDA Keonjhar

Block Development Officer
Excess in Percentage

32

ORIGINAL

BILL OF QUANTITY (BOQ)

NAME OF THE WORK: - Construction of Additional classroom, Toilet and boundary wall at S.N Nodal UPS for the year 2020-21

Amount put to Tender : Rs. 1,347,361.00
 Class of Contractor : D' & C' class only
 Cost of Tender Paper : Rs.6000.00
 Date required for completion : 3(Three) calender Month

Sl. no.	Item of Work	Quantity	Unit	Rate	Amount
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads, lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth . as per direction of Engineer-in-charge	91.27	cum	182.80	16683.65
2	Supplying, filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty and all taxes of materials cost of all labour with T&P etc. complete. as per direction of Engineer-in-charge	51.81	cum	454.84	23565.47
3	P.C.C (1:3:6) in foundation and plinth using 25mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer incharge.	16.21	cum	4742.97	76861.41
4	P.C.C (1:4:8) in foundation and plinth using 40mm H.G.H.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer incharge.	3.17	cum	4149.53	13159.98
5	R.C.C (M20) using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of Engineer incharge.				
a	Footing	7.22	Cum	5359.84	38721.63
b	Plinth beam	6.47	Cum	5669.12	36663.03
c	Column & Wall Beam	3.62	Cum	11577.19	41939.08
d	Lintel & Sill band	2.05	Cum	10067.92	20626.68
e	Roof slab	9.45	Cum	9994.82	94513.90
f	Chajja	10.34	Cum	864.20	8935.85
6	Straightening, cutting, bending, binding of M.S rod or Tor steel, tying up the grills and placing in position including cost of binding wire with all cost conveyance, taxes etc completed in all respect as per the direction of Engineer in charge.	27.59	Qntl	7573.66	208969.26

7	Fly ash brick masonry with cement mortar (1:6) in foundation and plinth including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	45.37	Cum	4278.70	194115.98
8	Brick work with Fly ash brick with cement mortar (1:6) in superstructure including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	59.45	Cum	4316.65	256618.01
9	Providing 20 mm thick grading plaster (1:4) over roof slab including cost, conveyance, royalty, curing all etc complete	63.03	Sqm	222.31	14011.08
10	12 mm thick cement plaster in C.M.(1:6) in external surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	214.56	Sqm	141.27	30310.48
11	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	422.05	Sqm	199.91	84372.69
12	12mm thick cement plaster with cement mortar (1:6) cement punning for dadoes and skirting including cost, conveyence, royalties, taxes etc of all materials, costs of all labour sundries T& P etc complete as per direction of Engineer in charge.	7.62	Sqm	164.96	1256.63
13	Fixing tiles (vetrifed tiles 600mm x 600mm) in floors , treads or steps and landing on 20mm thicks bed of CM 1:4 jointed with neat cement slury mixed with pigment to match the shade of the tiles including rubing and polishing with cost conveyance of all materials etc complete.	62.77	Sqm	955.07	59946.26
14	Fixing vetrifed tiles in wall, skirting & risers of steps on 12 mm thick cement plaster (1:3) ratio jointed with neat cement slury mixed with pigments to match the shade of tiles including rubbing & polishing complet as dinction of engg. in charge.	13.56	Sqm	965.08	13089.83
15	25mm thick A.S flooring with C.C (1:2:4) including punning using 12mm size H.G.C.B chips including cost, conveyence, royalties, taxes etc of all materials, costs of all labour sundries T& P etc complete as per direction of Engineer in charge.	8.67	Sqm	308.73	2678.16
16	Cement washing 1 coat with shell lime on slacked & cement including all cost, taxes etc complete as per direction of Engineer in charge.	98.24	Sqm	16.03	1574.77
17	Finishing wall with water proofing cement paint of approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc complete as per direction of Engineer in charge.	392.24	Sqm	34.65	13401.95

18.	Priming one coat with approved wall primer including all cost, taxes etc complete as per direction of Engineer in charge.	223.19	Sqm	59.08	13185.83
19	Finishing wall with weather coat paint of approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc complete	223.19	Sqm	72.85	16259.07
20	Supplying, fitting and fixing MS Grills, Doors and Windows made out of structural steel flat etc as per direction of Engineer in charge.	447.49	KG	132.29	59197.15
21	Priming one coat on new iron work & wood work with all cost of material & labour T & P etc complete as per direction of Engineer in charge.	34.84	Sqm	54.46	1882.02
22	Painting two coats with any approved on new wood work / iron work with all cost, of materials and labour, T & P etc completed as per direction of Engineer in charge.	34.84	Sqm	138.36	4820.61

Total

1347360.45

Total

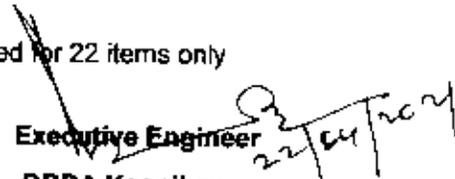
1347361.00

(Thirteen lakh forty seven thousand three hundred sixty one)

TOTAL 22 NOS ITEM ONLY


Assistant Engineer
Ghasipura Block

Approved for 22 items only


Executive Engineer
DRDA Keonjhar

TO BE FILLED BY THE TENDERER

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost
Excess in Percentage
Less in Percentage

in Figure	
	%
	%
	%

In words

Notes:-

- 1) The Tenderer should quote the percentage up to one decimal point only.
tendering .
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

**Executive Engineer
DRDA Keonjhar**

**Block Development Officer
Excess in Percentage**

BILL OF QUANTITY (BOQ)

NAME OF THE WORK: - Construction of Additional classroom and Toilet at Nuagaon UGUP School for the year 2020-21

Amount put to Tender : Rs. 900,431.00
 Class of Contractor : D' & C' class only
 Cost of Tender Paper : ~~2000.00~~
 Date required for completion : Rs. 0000.00
 3(Three) calendar Month

Sl. no.	Item of Work	Quantity	Unit	Rate	Amount
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads, lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth . as per direction of Engineer-in-charge	55.27	cum	182.80	10102.96
2	Supplying, filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty and all taxces of materials cost of all labour with T&P etc. complete. as per direction of Engineer-in-charge	45.81	cum	366.84	16805.09
3	P.C.C (1:3:6) in foundation and plinth using 25mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer incharge.	10.21	cum	4700.73	47972.52
4	P.C.C (1:4:8) in foundation and plinth using 40mm H.G.H.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer incharge.	3.17	cum	4107.29	13026.01
5	R.C.C (M20) using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of Engineer incharge.				
a	Footing	7.22	Cum	5320.24	38435.54
b	Plinth beam	2.72	Cum	5629.52	15296.25
c	Column & Wall Beam	3.62	Cum	11537.59	41795.63
d	Lintel & Sill band	2.05	Cum	10028.32	20545.55
e	Roof slab	9.45	Cum	9955.22	94139.43
f	Chajja	10.72	Cum	861.63	9234.47
6	Straightening, cutting, bending, binding of M.S rod or Tor steel, tying up the grills and placing in position including cost of binding wire with all cost conveyance, taxes etc completed in all respect as per the direction of Engineer in charge.	24.3	Qntl	7573.68	184017.81

7	Fly ash brick masonry with cement mortar (1:6) in foundation and plinth including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	15.37	Cum	4254.06	65376.40
8	Brick work with Fly ash brick with cement mortar (1:6) in superstructure including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	22.70	Cum	4292.01	97421.94
9	Providing 20 mm thick grading plaster (1:4) over roof slab including cost, conveyance, royalty, curing all etc complete	63.03	Sqm	220.29	13883.52
10	12 mm thick cement plaster in C.M.(1:6) in external surface of wall including cost, conveyance etc as per direction of Engineer-in-charge	214.56	Sqm	139.95	30027.26
11	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost, conveyance etc as per direction of Engineer-in-charge	128.05	Sqm	198.33	25396.82
12	12mm thick cement plaster with cement mortar (1:6) cement punning for dadoes and skirting including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge.	7.62	Sqm	163.64	1246.58
13	Fixing tiles (vetrifed tiles 600mm x 600mm) in floors , treads or steps and landing on 20mm thicks bed of CM 1:4 jointed with neat cement slury mixed with pigment to match the shade of the tiles including rubing and polishing with cost conveyance of all materials etc complete.	62.77	Sqm	953.23	59830.26
14	Fixing vetrifed tiles in wall, skirting & risers of steps on 12 mm thick cement plaster (1:3) ratio jointed with neat cement slury mixed with pigments to match the shade of tiles including rubbing & polishing complet as dirction of engg. In charge.	13.56	Sqm	963.94	13074.31
15	25mm thick A.S flooring with C.C (1:2:4) including punning using 12mm size H.G.C.B chips including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T & P etc complete as per direction of Engineer in charge.	8.67	Sqm	307.68	2659.00
16	Cement washing 1 coat with shell lime on slacked & cement including all cost, taxes etc complete as per direction of Engineer in charge.	98.24	Sqm	16.03	1574.77
17	Finishing wall with water proofing cement paint of approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc complete as per direction of Engineer in charge.	98.24	Sqm	32.71	3213.95

18	Priming one coat with approved wall primer including all cost, taxes etc complete as per direction of Engineer in charge.	223.19	Sqm	59.08	13185.83
19	Finishing wall with weather coat paint or approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc complete	223.19	Sqm	72.85	16259.07
20	Supplying, fitting and fixing MS Grills, Doors and Windows made out of structural steel flat etc as per direction of Engineer in charge.	447.49	KG	132.29	59197.15
21	Priming one coat on new iron work & wood work with all cost of material & labour T & P etc complete as per direction of Engineer in charge.	34.84	Sqm	54.46	1882.02
22	Painting two coats with any approved on new wood work / iron work with all cost, of materials and labour, T & P etc completed as per direction of Engineer in charge.	34.84	Sqm	138.36	4820.61

Total

900430.75

Total

900431.00

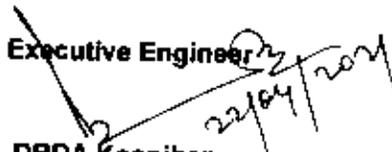
TOTAL 22 NOS ITEM ONLY

(Nine lakh four hundred thirty one)


Assistant Engineer

Ghasipura Block

Approved for 22 items only


Executive Engineer
22/04/2024
DRDA Keonjhar

TO BE FILLED BY THE TENDERER

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

Excess in Percentage

Less in Percentage

in Figure

	%
	%
	%

In words

Notes:-

- 1) The Tenderer should quote the percentage up to one decimal point only.
tendering .
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

**Executive Engineer
DRDA Keonjhar**

**Block Development Officer
Excess in Percentage**

**BILL OF QUANTITY (BOQ)**

ORIGINAL

NAME OF THE WORK: - Construction of Additional classroom and Toilet at Batto NUPS for the year 20

Amount put to Tender : Rs. 900,441.00
Class of Contractor : D' & C' class only
Cost of Tender Paper : Rs.4000.00
Date required for completion : 3(Three) calender Month

Sl. no.	Item of Work	Quantity	Unit	Rate	Amount
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads, lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth . as per direction of Engineer-in-charge	55.27	cum	182.80	10102.96
2	Supplying, filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty and all taxces of materials cost of all labour with T&P etc. complete. as per direction of Engineer-in-charge	45.81	cum	366.84	16805.09
3	P.C.C (1:3:6) in foundation and plinth using 25mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer incharge.	10.21	cum	4700.73	47972.52
4	P.C.C (1:4:8) in foundation and plinth using 40mm H.G.H.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer incharge.	3.17	cum	4107.29	13026.01
5	R.C.C (M20) using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of Engineer incharge.				
a	Footing	7.22	Cum	5320.24	38435.54
b	Plinth beam	2.72	Cum	5629.52	15296.26
c	Column & Wall Beam	3.62	Cum	11537.59	41795.63
d	Lintel & Sill band	2.05	Cum	10028.32	20545.55
e	Roof slab	9.45	Cum	9955.22	94139.43
f	Chajja	10.72	Cum	861.63	9234.47
6	Straightening, cutting, bending, binding of M.S rod or Tor steel, tying up the grills and placing in position including cost of binding wire with all cost conveyance, taxes etc completed in all respect as per the direction of Engineer in charge.	24.3	Qntl	7573.66	184017.81

7	Fly ash brick masonry with cement mortar (1:6) in foundation and plinth including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	15.37	Cum	4254.06	65376.40
8	Brick work with Fly ash brick with cement mortar (1:6) in superstructure including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	22.70	Cum	4292.01	97432.19
9	Providing 20 mm thick grading plaster (1:4) over roof slab including cost, conveyance, royalty, curing all etc complete	63.03	Sqm	220.29	13883.52
10	12 mm thick cement plaster in C.M.(1:6) in external surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	214.56	Sqm	139.95	30027.26
11	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	128.05	Sqm	198.33	25396.82
12	12mm thick cement plaster with cement mortar (1:6) cement punning for dadoes and skirting including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T& P etc complete as per direction of Engineer in charge.	7.62	Sqm	163.64	1246.58
13	Fixing tiles (vetrifed tiles 600mm x 600mm) in floors , treads or steps and landing on 20mm thicks bed of CM 1:4 jointed with neat cement slury mixed with pigment to match the shade of the tiles including rubing and polishing with cost conveyance of all materials etc complete.	62.77	Sqm	953.23	59830.26
14	Priming one coat with approved wall primer including all cost, taxes etc complete as per direction of Engineer in charge.	223.19	Sqm	59.08	13185.83
15	Finishing wall with weather coat paint or approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc	223.19	Sqm	72.85	16259.07
16	Fixing vetrifed tiles in wall, skirting & risers of steps on 12 mm thick cement plaster (1:3) ratio jointed with neat cement slury mixed with pigments to match the shade of tiles including rubbing & polishing complet as diction of engg. In charge.	13.56	Sqm	963.94	13074.31
17	25mm thick A.S flooring with C.C (1:2:4) including punning using 12mm size H.G.C.B chips including cost, conveyance, royalties, taxes etc of all materials, costs of all labour sundries T& P etc complete as per direction of Engineer in charge.	8.67	Sqm	307.68	2669.00

18	Cement washing 1 coat with shell lime on stacked & cement including all cost. taxes etc complete as per direction of Engineer in charge.	98.24	Sqm	16.03	1574.77
19	Finishing wall with water proofing cement paint of approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc complete as per direction of Engineer in charge.	98.24	Sqm	32.71	3213.95
20	Supplying, fitting and fixing MS Grills, Doors and Windows made out of structural steel flat etc as per direction of Engineer in charge.	447.49	KG	132.29	59197.15
21	Priming one coat on new iron work & wood work with all cost of material & labour T & P etc complete as per direction of Engineer in charge.	34.84	Sqm	53.04	1882.02
22	Painting two coats with any approved on new wood work / iron work with all cost, of materials and labour, T & P etc completed as per direction of Engineer in charge.	34.84	Sqm	138.36	4820.61

Total

900441.00

Rupees(Ninelakhs fourhundred fortyone) only.


Assistant Engineer
Ghasipura Block

Approved for 22 items only


Executive Engineer
DRDA Keonjhar

TO BE FILLED BY THE TENDERER

1) My/ Our quoted rate is (both in figure and words)

	in Figure	In words
Equal to Estimate Cost	%	
Excess in Percentage	%	
Less in Percentage	%	

Notes:-

- 1) The Tenderer should quote the percentage up to one decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

**Executive Engineer
DRDA Keonjhar**

**Block Development Officer
Ghasipura Block**