

TENDER SCHEDULE



NAME OF THE WORK: - CONSTRUCTION OF ADDITIONAL CLASS ROOM AT LAXMI NARAYAN U,P SCHOOL

Amount put to Tender : 1325779.66

EMD : _____

Class of Contractor : D' & C' class only

Cost of Tender Paper : Rs.6000.00

Date required for completion : 4(four) calender Month

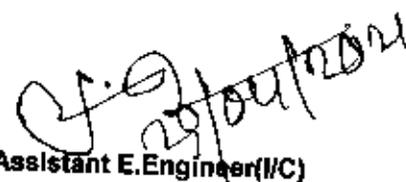
Sl. no.	Item of Work	Quantity	Unit	Rate	Amount
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads,lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth . as per direction of Engineer-in-charge	76.93	cum	184.60	14201.28
2	Supplying, filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty and all taxces of materials cost of all labour with T&P etc. complete. as per direction of Engineer-in-	83.55	cum	326.03	27240.00
3	C.C (1:4:8) using 40 mm hg metal in foundation with 40 mm size hand Broken metal including cost, conveyance, royalty etc complete as per direction of Engineer-in-charge	20.12		4049.16	81469.10
4	RRHG stone masonry in cm (1:6) using good quality of stone in F & P including all cost etc comp.	18.43		3503.99	64579.00
5	Fly ash.Brick masonry in cement mortar (1:6) in Superstructure including cost ,conveyance etcas per direction of Engineer-in-charge .	29.75		4162.70	123840.00
6	RCC M20 grade with 20mm and down graded black hard granite crusher broken chips including hosting and laying as per direction of Engineer-in-charge	43.31	Cum	4846.65	209908.00
7	Rigid & smooth centring and shuttering				
	(A) Column foundation & Plinth	97.12	Sqm	108.40	10528.00
	(B) Column & beam	91.76	Sqm	724.09	66444.00
	(C) Lintel	22.60	Sqm	270.00	6102.00
	(D) Chajja & Roof slab	129.53	Sqm	425.21	55078.00

	Straightening bent up or coiled M.S. rod or HYSD steel (Fe- 415), cutting, bending, cracking, hooking, welding or jointing (if required), the M.S rod or HYSD steel and binding, tying the grills, hoisting, lowering and placing in proper position as requires per direction of Engineer-in-charge	41.14	Qtl	6494.80	267225.00
9	Supplying fitting & fixing of M.S.Grill for Window including all cost of material & Laour charges as per direction of Engineer-in-charge.	709.20	KG	80.00	56736.00
10	6mm thick cement plaster in cement mortar (1:4) to RCC surface finished smooth including deep chipping and slury treatment including punning including cost, conveyance & royalty	141.56	Sqm	153.90	21787.00
11	12 mm thick cement plaster in C.M.(1:6) in external surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	137.93	Sqm	139.90	19297.00
12	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost ,conveyance etc as per direction of Engineer-	160.00	Sqm	198.60	31775.00
13	20 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	22.22		206.00	4577.00
14	Supplying fitting & fixing vetrified tiled in floors of size 600mmx600mm of approved make with application of polymer modified cement based water resistant adhesive bed of required thinkness of 10mm & filling joints of with Epoxy grout of approved quility including cost of all material labour & T & P ect comp as per direction of Engineer in Charges	116.05		1313.55	152437.00
15	Fixing the tiles in dados skirting risers of on 12 mm thick C.P. (1:3) jointed with neat cement Slurry as per the direction of Engineer-in-Charge.	5.52		1156.52	6384.00
16	Painting 2 coat with approved paint over 1 coat of priming on new Door & Window work as per the direction of Engineer-in-Charge.	47.16		167.20	7885.00
17	One coat of cement washing over plastering surfaces	439.49		14.60	6417.00
18	Finishing wall surface with Acrylic wall putty(water based of approved make and finished smooth and even to receive paint in including cost of scaffolding etc complete as per direction of Engineer-in-charge	439.49		71.38	31373.00

19	Wall painting two coat with plastic emulsion paint over a coat of priming including cost of all materials and labour etc. complete as per the direction of Engineer-in-Charge.	296.04		80.08	23708.00
20	Finishing wall surface with weather coat including all cost	137.93		73.57	10148.00
21	20 mm thick grading plaster in C:M (1:4) over roof slab etc. complete as per direction of Engineer-in-charge. .	120.95	Sqm	220.40	26657.00
Total					1325779.66

TOTAL 21 (Twenty one) NOS ITEM ONLY

Approved for 21 (Twenty one) items only


 Assistant E. Engineer (I/C)
 Ghatgaon Block


 Executive Engineer
 DRDA Keonjhar


 Block Development Officer
 Ghatagaon Block

TO BE FILLED BY THE TENDERER

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost
 Excess in Percentage
 Less in Percentage

in Figure	
	%
	%
	%

In words	

Notes:-

- 1) The Tenderer should quote the percentage up to one decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quoted their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

Assistant E .Engineer(I/C)
 Ghatagaon Block

Executive Engineer
 DRDA Keonjhar

Block Development Officer
 Ghatagaon Block