

TENDER SCHEDULE

Sl. No		Description of Item	Date of completion 04 months			
			Unit	Total Qnt.	Rate	Amount
		Name of the work: -Upgradation of Rangapat Nodal UPS, Katarabeda, Manoharpur GP, Ghatgaon Under OMBADC.		Amount put to tender: Rs 13,80,895.00		
				Class of contractor: D & C		
				Cost of Tender Paper : Rs. 8,000/-		
1		Earth work in hard soil or gravelling soil for excavation of foundation including dressing and levelling of beds and depositing the soil away from the work side with all lead & lift including cost of all labour, T & P, dewatering, shoring and shuttering for the work etc. complete & as per direction of Engineer in charge	Cum	146.92	184.59	27119.96
2		Supplying and Filling in foundation and plinth with sand , well watered and rammed with all leads and lifts, cost convenience and royalty and all taxes of materials , cost of labour, T & P, dewatering, required for the works etc, complete in all respect as directed by engineer-in-charge.	Cum	31.27	326.06	10195.90
3		Cement concrete of proportion (1:4:8) with using 40 MM size hbg metal free from weathered and skin with including cost, convenience, royalty and taxes of all materials, labour etc including curing, dewatering if required in all respect including centering and shuttering etc. complete & as per direction of Engineer in charge	Cum	26.03	3992.96	103936.75
		Cement cement concrete (1:2:4) A.S. flooring with 12 mm nominal size down graded nominal size aggregate mechanically mixed and vibrated in foundation and bed protection of speciation for road and Bridge work & Direction of the Eng in charge the work etc complete as direction by the engineering-in-charge.		2.79	296.69	827.77
4		Cement concrete (1:2:4) with 20 mm nominal size down graded nominal size aggregate mechanically mixed and vibrated in foundation and bed protection of speciation for road and Bridge work & Direction of the Eng in charge the work etc complete as direction by the engineering-in-charge.	cum	3.43	5872.83	20143.81
5		Reinforcement cement concrete M-20 grade with 20 mm nominal size down graded nominal size aggregate mechanically mixed and vibrated in foundation and bed protection of speciation for road and Bridge work & Direction of the Eng in charge the work etc complete as direction by the engineering-in-charge.	cum	7.56	4757.03	35963.15
6		RRHG stone massionary masonry in CM(1:6)for In foundation and plinth in curbing and watering, curing etc including cost, conveyance, royalty and all taxes of materials with cost. of labour, T& P etc. complete required for the work complete in all respect as directed by the engineering -in-charge.	Cum	109.29	3399.34	371513.87

7	Suppling, coiled M.S rod or HYSD steel (Fe-415),cutting, bending,cracking,hooking,olding or jointing (if required) reinforcement including labour charges for cutting, bending, binding and straightening and tying the grills and placing in position including cost of binding wire 18 to 20 gauge as per drawing and technical specificalton as directed by the engineering-in-charge.	Qtl	7.38	6548.46	48327.63
8	Rigid & smooth centering and Shuttering.		0.00		0.00
	(a) Column and beam	Sqm	19.02	736.64	14010.89
	(b) Lintel	Sqm	3.39	263.33	892.69
	© Roof slab	Sqm	14.60	439.89	6422.39
9	Fly ash brick(25cmx12cmx8cm) masonry in CM(1:6)for superstructure in foundation and plinth having a crushing strength of not less than 75 kg/sqcm including splays cutting, circular moulding, chamfering and curbing and watering, curing etc including cost, conveyance, royalty and all taxes of materials with cost. of labour, T & P etc. complete required for the work complete in all respect as directed by the engineering -in-charge.				
	faondtion	Cum	1.15	4656.79	5355.31
(a)	In superstructure .	Cum	80.70	4690.12	378492.68
10	12 mm thick cement plaster in C.M. (1:6) finishing smooth to outer side brickwork after ranking out the joints including watering and curing with cost, conveyance, royalty of all materials , labour with T & P required for the work including all taxes etc. complete in all respect all floors as directed by engineering-in-charge.	Sqm	335.75	142.33	47787.30
12	16 mm thick cement plaster in C.M. (1:6) finishing smooth to inner side brickwork after ranking out the joints including watering and curing with cost, conveyance, royalty of all materials , labour with T & P required for the work including all taxes etc. complete in all respect all floors as directed by engineering-in-charge.	Sqm	335.75	216.94	72837.61
13	20 mm thick cement plaster in C.M. (1:6) finishing smooth to outer side brickwork after ranking out the joints including watering and curing with cost, conveyance, royalty of all materials , labour with T & P required for the work including all taxes etc. complete in all respect all floors as directed by engineering-in-charge.	Sqm	172.76	221.91	38337.17
14	20 mm thick cement plaster in C.M. (1:4) grading finishing smooth to outer side brickwork after ranking out the joints including watering and curing with cost, conveyance, royalty of all materials , labour with T & P required for the work including all taxes etc. complete	Sqm	22.18	232.39	6154.41
	12 mm thick cement plaster in C.M. (1:4) grading finishing smooth to outer side brickwork after ranking out the joints including watering and curing with cost, conveyance, royalty of all materials , labour with T & P required for the work including all taxes etc. complete		12.41	153.47	1904.56
15	Painting2 coat with approved paint over 1 coat of cement washing on as per the direction of Engineer- in -charge.	Sqm	856.68	14.06	12044.92

16	Painting 2 coat with approved paint over 1 coat of priming on as per the direction of Engineer-in-charge.	Sqm	802.80	65.34	52454.95
17	Finishing out side wall surface with weather coat with 2 coat with any approved shade overhead coat of priming including cost of all material and labour (T&P) etc.as per direction of Engineer-in-Charge.	Sqm	802.80	75.43	60555.20
	Painting 2 coat door & window with approved paint over two coat of priming on as per the direction of Engineer-in-charge.		16.58	196.00	3249.68
18	Fixing tiles in floor over thick bed of cement mortar 1:1 including rubbing and polishing excluding cost of tiles	Sqm	14.78	1112.85	16447.92
19	Fixing tiles in dados and riser of steps on 12mm thick cement plaster (1:3) including rubbing and polishing excluding cost of tiles	Sqm	2.65	1222.19	3238.80
20	MS Door & window	kg	588.00	68.00	40000.00
21	Provison of Disply board (4 ft x3ft)				2000.00
				Total Rs	1380895.00

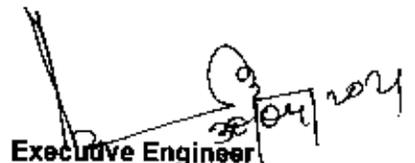
(Rupees Thirteen lakhs Eighty thousand Eight hundred Ninetyfive) only.

Tender schedule for the project:-upgradation of Rangapat U.P. school, Katarabeda. Under Manoharpur GP Under OMBADC Ghatgaon Block is approved for RS 13,80,895/-(Rupees Thirteen lakh Eighty thousand Eight hundred Ninetyfive) only with 21 (twentyone) items only.

G.S.T.cost in 12% (CGST6% +SGST6%)will be add at the time of agreement.


Asst. Executive Engineer
Ghatgaon


Block Development Officer
Ghatgaon


Executive Engineer
DRDA,Keonjhar

My /Our quoted rate is _____ %
Excess/Less/Equal to the corresponding estimate rate
(Write both In words and Figures)

NOTES:-

1. The Contractor should not write anything except quoting of percentage,excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned,the Tender is liable for rejection.
2. Strike out which are not applicable.
3. Percentage quoted by the contractor shall be accurately filled in figure and words,so that there is no discrepancy.

4. If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
5. The percentage quoted in the tender without mentioning excess or less will be treated as excess.
6. The contractor should write percentage excess or less up to two decimal points only. If he/her writes the percentage excess or less more than two decimal points it will be treated as cancelled.

**Asst. Executive Engineer
Ghatgaon**

**Block Development Officer
Ghatgaon**

**Executive Engineer
DRDA, Keonjhar**