

BILL OF QUANTITY (BOQ)

NAME OF THE WORK: - Construction of Add.Cla Room at Balabhadrapur, Barbil GP for the year 2020-21

Amount put to Tender	:	Rs. 1,999,941.00
EMD	:	1% of the Amount put to Tender
Class of Contractor	:	D' & C' class only
Cost of Tender Paper	:	Rs.6000.00
Date required for completion	:	4(Four) calender Month

Sl. no.	Item of Work	Quantity	Unit	Rate	Amount
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads, lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth . as per direction of Engineer-in-charge	95.02	Cum	185.90	17664.00
2	Supplying, filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty etc. complete. as per direction of Engineer-in-charge	103.67	Cum	454.80	47149.00
3	C.C (1:3:6) using 40 mm hg metal in foundation with 40 mm size hand Broken metal including cost, conveyance, royalty etc complete as per direction of Engineer-in-charge	23.40	Cum	4311.17	100881.00
4	RCC M20 grade with 20mm and down graded black hard granite crusher broken chips including hosting and laying				
	(A) Column foundation & Plinth	11.75	Cum	4743.98	55742.00
	(B) Grade beam	5.92	Cum	5280.45	31260.00
	(C) Column & beam	12.61	Cum	10479.33	132144.00
	(D) Lintel	3.38	Cum	8648.33	29231.00
	(E) Chajja & Roof slab	22.13	Cum	10634.61	235344.00
5	Straightening bent up or coiled M.S. rod or HYSD steel (Fe- 415), cutting, bending, cracking, hooking, welding or jointing (if required), the M.S rod or HYSD steel and binding, tying the grills, hoisting, lowering and placing in proper position as requires per direction of Engineer-in-charge	54.30	Qntl	7569.78	411039.00
6	Fly ash.Brick masonry in cement mortar (1:6) in fdn and Plinth wall including cost ,conveyance etc as per direction of Engineer-in-charge .	33.18	Cum	4064.66	134865.00
7	Fly ash.Brick masonry in cement mortar (1:6) in Superstructure including cost ,conveyance etc as per direction of Engineer-in-charge .	44.67	Cum	4102.61	183264.00

8	20 mm thick grading plaster in CM (1:4) to roof slab including all cost carriage rayalty etc complete	160.07	Sqm	213.86	34233.00
9	12 mm thick cement plaster in C.M.(1:6) in external surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	326.37	Sqm	135.40	44190.00
10	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	291.19	Sqm	192.85	56156.00
11	12 mm thick cement plaster in C.M.(1:4) with neat cement punning for skirting including cost ,conveyance etc as per direction of Engineer-in-charge	29.24	Sqm	154.42	4515.00
12	Supplying fitting & fixing of vetrified tiles in floors, treads or steps and landing on 20 mm thick bed of C.M(1:1) jointed with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing	151.53	Sqm	1199.88	181818.00
13	Fixing the tiles in dados skirting risers of on 12 mm thick C.P. (1:3) jointed with neat cement Slurry	63.32	Sqm	1106.49	70063.00
14	Supplying fitting & fixing of M.S.Grill for Window including all cost of material & Laour charges as per direction of Engineer-in-charge.	945.72	Kg	133.80	126537.00
15	Priming 1 coat with primer on new iron work with approved primer including cost of primer etc complete	65.80	Sqm	55.37	3643.00
16	Priming 1 coat with wall primer with approved wall primer including cost of primer etc complete	588.32	Sqm	71.17	41871.00
17	Finishing wall with approved weather 2 coats with including all cost etc complete	664.32	Sqm	80.23	53298.00


18	Painting 2-coats with enamel paint over a coat of priming to door and windows.	65.80	Sqm	76.51	5034.00
Total 18(Eighteen) nos of item only				Total	1999941.00


(Rupees Nineteen Lakh Nintynine Thousand Nine Hundred Fotyone)Only

Tender Schedule for the project- Construction of Addl. Class room at Balabhadrapur, Barbil GP under OMBADC,Saharpada Block is approved for Rs 1999941.00 (Rupees Nineteen Lakh Nintynine Thousand Nine Hundred Fortyone)only with 18 nos items only

G.S.T Cost in 12% (CGST 6% +SGST 6%) & with Labour cess 1% will be added at the time of Agreement.

Approved for 18(Eighteen) items only


12/05/21
Asst Exe. Engineer
Saharpada Block


17/05/2021
APD(Tech)
DRDA Keonjhar

TO BE FILLED BY THE TENDERER

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost
Excess in Percentage
Less in Percentage

in Figure

	%
	%
	%

In Words

Notes:-

- 1) The Tenderer should quote the percentage up to one decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quoted their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

APD (Tech)
DRDA Keonjhar

Block Devlopment Officer
Saharpada Block

TENDER SCHEDULE

39

DETAILED ESTIMATE FOR THE WORK :-CONSTRUCTION OF SCIENCE LAB ROOM AT GOPABANDHU HIGH SCHOOL , JAMUDA		AMOUNT PUT TO TENDER :- RS. 1420241.00			
		CLASS OF CONTRACTOR :- D & C			
		COST OF TENDER PAPER :- RS. 6000.00			
		EARNEST MONEY DEPOSIT 1% : RS. 14202.00			
		TIME OF COMPLETION : 4 MONTHS			
SI No.	ITEM OF WORK	Quantity	Unit	Rate	Amount
1	2	3	4	5	6
1	E/W in excavation of foundation in hardsoil within initial lead & lift including levelling and dressing the bed complete.	49.17	One cum	Rs. 185.90	9140.70
2	Filling F & P with sand well watered and rammed complete.	74.11	One cum	Rs. 454.80	33705.23
3	C.C.(1:3:6) with using 4cm size H.G.H B metal including all cost carriage royalty ect complete.	19.04	One cum	Rs. 4,311.17	82084.68
4	Brick work with Fly ash.Bricks in cement mortar (1:6) in Fdn & Pl of size 10"x5"x3" having crushing strength not less than 75 kg/cm ² dimensional tolerance ± 8% with carriage and royalty	25.96	One cum	Rs. 4,064.66	105518.57
5	Reinforcement cement concrete M - 20 grade with 20mm and down grade block hard granite (Crusher broken) stone chips including hoisting and laying including cost, conveyance, royalties, taxes and centering and shuttering etc. complete as per the direction of the Eng. In Charge.				
	a) Column base	7.79	One cum	Rs. 4,743.98	36955.60
	b) Plinth band	4.26	One cum	Rs. 5,280.45	22494.72
	c) Lintel band	2.83	One cum	Rs. 8,648.33	24476.50
	d) Chajja	1.34	One cum	Rs.10,634.61	14250.38
	e) Column & Roof beam	9.90	One cum	Rs.10,479.33	103745.37
	f) Slab	14.68	One cum	Rs.10,634.61	156116.07

6	Providing HYSD bar reinforcement for R.C.C. work including Straightening, cutting, bending, binding, welding, tying the grills, laying and placing in proper position as per approved design and drawing including cost, conveyance of 18 to 20 gauge binding wire cost and conveyance of HYSD bars complete in all respect as per specification for road & Bridge and direction of Eng - in Charge.	38.61	One Qntl	Rs. 7,569.78	292269.21
7	Brick work with Fly Ash.B.Bricks in cement mortar (1:6) in superstructure of size 10"x5"x3" having crushing strength not less than 75 kg/cm ² with dimensional tolerance ± 8% with carriage and royalty	27.27	One cum	Rs. 4,102.61	111878.17
8	20mm thick cement plaster in cm (1:4) in grading plaster for roof slab with carriage and royalty	130.23	One Sqmt	Rs. 213.86	27850.99
9	16mm thick cement plaster (1:6) finished smooth to inside rough surface of brick walls after racking out the joint including watering and curing with cost and conveyance, royalties and taxes of all materials and labour charges	164.26	One Sqmt	Rs. 192.85	31677.54
10	12mm thick cement plaster (1:6) finishing smooth to outside smooth surface of brick walls after racking out the joint including watering and curing with cost, conveyance, royalties and taxes of all materials and cost of all labour charges required for	251.93	One Sqmt	Rs. 135.40	34111.32
11	12mm thick cement plaster (1:4) with neat cement punning for skirting with carriage and royalty	42.77	One Sqmt	Rs. 154.42	6604.54
12	Supplying fitting fixing of Vetrified floor tile colour/printed series(homogeneous) in floor of size 600mm x 600 mm laid on 20 mm thick cement mortar (1:1) and filling joint with white cement of approved quality including all cost of materials .T & P etc.complete	112.95	One Sqmt	Rs. 1,199.88	135526.45
13	Supplying fitting fixing of tile in dado and skirting and riser of step on 12 mm thick cp in cement mortar (1:3) with cement sully mixwith pigment to match the shade of the tile with rubbing & polishing including all cost of materials .T & P etc.complete	35.65	One Sqmt	Rs. 1,106.49	39446.37
14	supplying fitting and fixing fabricated ms grills in door window including all taxes	669.14	kg	Rs. 133.80	89530.93
15	painting one coats on new iron work with approved primer including cost of primer & labour	47.94	One Sqmt	Rs. 55.37	2654.44
16	Priming one coat over plaster surface with water bound cement primer with cost of all material	373.42	One Sqmt	Rs. 71.17	26576.30
17	Wall painting two coats with weather coat with cost of materials and labours	373.42	One Sqmt	Rs. 80.23	29959.49

18	painting two coats with approved new iron work with all cost	47.94	One Sqmt	Rs. 76.51	3667.89
----	--	-------	----------	-----------	---------


TOTAL = 1420241.47

say = 1420241.00

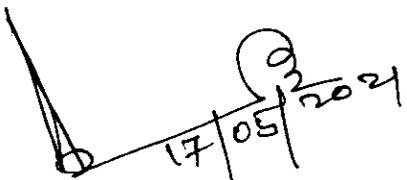
(RUPEES FORTEEN LAKHS TWENTY THOUSAND TWO HUNDRED FORTY ONE ONLY)

Tender schedule for the project:--CONSTRUCTION OF SCIENCE LAB ROOM AT GOPABANDHU HIGH SCHOOL , JAMUDA approved for Rs.1420241/-(RUPEES FORTEEN LAKHS TWENTY THOUSAND TWO HUNDRED FORTY ONE ONLY)with 18 (EIGHTEEN) items only.

Add for G.S.T cost 12% (CGST6%+SGST 6%) & Labour cess 1% will be added at the time of agreement .


12/05/21
Asst. Executive Engineer
Saharpada Block

Block Development Officer
Saharpada Block


17/05/2021
Executive Engineer
DRDA,Keonjhar

My / Our quoted rate is % Excess / Less
/ Equal to the corresponding estimate rate

(write both in words and figures)

NOTES:-

1. The Contractor should not write anything except quoting of percentage,excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned,the Tender is liable for rejection.
2. Strike out which are not applicable.
3. Percentage quoted by the contractor shall be accurately filled in figure and words,so that there is no discrepancy.
4. If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
5. The percentage quoted in the tender without mentioning excess or less without treated as excess.
6. The contractor should write percentage excess or less up to two decimal point only.If he/her writes the percentage excess or less more than two decimal points it will be treated as cancelled.

Signature of the Contractor
with address.

TENDER SCHEDULE

20

DETAILED ESTIMATE FOR THE WORK :-CONSTRUCTION OF ADDITIONAL CLASS ROOM AT GOPABANDHU HIGH SCHOOL , JAMUDA		AMOUNT PUT TO TENDER :- RS. 2014011.00			
		CLASS OF CONTRACTOR :- C & B			
		COST OF TENDER PAPER :- RS. 6000.00			
		EARNEST MONEY DEPOSITE 1% : RS. 20140.00			
		TIME OF COMPLETION : 4 MONTHS			
SI No.	ITEM OF WORK	Quantity	Unit	Rate	Amount
1	2	3	4	5	6
1	EW in excavation of foundation in hardsoil within initial lead & lift including levelling and dressing the bed complete.	95.02	One cum	Rs. 185.90	17664.22
2	Filling F & P with sand well watered and rammed complete.	103.67	One cum	Rs. 454.80	47149.12
3	C.C.(1:3:6) with using 4cm size H.G.H B metal including all cost carriage royalty ect complete.	23.40	One cum	Rs. 4,311.17	100881.38
4	Brick work with Fly ash.Bricks in cement mortar (1:6) in Fdn & Pl of size 10"x5"x3" having crushing strength not less than 75 kg/cm ² dimensional tolerance ± 8% with carriage and royalty	33.15	One cum	Rs. 4,064.66	134743.48
5	Reinforcement cement concrete M - 20 grade with 20mm and down grade block hard granite (Crusher broken) stone chips including hoisting and laying including cost, conveyance, royalties, taxes and centering and shuttering etc. complete as per the direction of the Eng. In Charge.				
	a) Column base	11.75	One cum	Rs. 4,743.98	55741.77
	b) Plinth band	5.92	One cum	Rs. 5,280.45	31260.26
	c) Lintel band	3.38	One cum	Rs. 8,648.33	29231.36
	d) Chajja	1.82	One cum	Rs.10,634.61	19354.99
	e) Column & Roof beam	12.61	One cum	Rs.10,479.33	132144.35
	f) Slab	20.31	One cum	Rs.10,634.61	215988.93

6	Providing HYSD bar reinforcement for R.C.C. work including Straightening, cutting, bending, binding, welding, tying the grills, laying and placing in proper position as per approved design and drawing including cost, conveyance of 18 to 20 gauge binding wire cost and conveyance of HYSD bars complete in all respect as per specification for road & Bridge and direction of Eng - in Charge.	54.30	One Qntl	Rs. 7,569.78	411039.05
7	Brick work with Fly Ash.B.Bricks in cement mortar (1:6) in superstructure of size 10"x5"x3" having crushing strength not less than 75 kg/cm ² with dimensional tolerance $\pm 8\%$ with carrage and royalty	44.67	One cum	Rs. 4,102.61	183267.69
8	20mm thick cement plaster in cm (1:4) in grading plaster for roof slab with carrage and royalty	160.07	One Sqmt	Rs. 213.86	34232.57
9	16mm thick cement plaster (1:6) finished smooth to inside rough surface of brick walls after racking out the joint including watering and curing with cost and conveyance, royalties and taxes of all materials and labour charges	291.19	One Sqmt	Rs. 192.85	56155.99
10	12mm thick cement plaster (1:6) finishing smooth to outside smooth surface of brick walls after racking out the joint including watering and curing with cost, conveyance, royalties and taxes of all materials and cost of all labour charges required for	325.94	One Sqmt	Rs. 135.40	44132.28
11	12mm thick cement plaster (1:4) with neat cement punning for skirting with carrage and royalty	29.24	One Sqmt	Rs. 154.42	4515.24
12	Supplying fitting fixing of Vetrified floor tile colour/printed series(homogeneous) in floor of size 600mm x 600 mm laid on 20 mm thick cement mortar (1:1) and filling joint with white cement of approved quality including all cost of materials .T & P etc.complete	151.53	One Sqmt	Rs. 1,199.88	181817.82
13	Supplying fitting fixing of tile in dado and skirting and riser of step on 12 mm thick cp in cement mortar (1:3) with cement sultry mixwith pigment to match the shade of the tile with rubbing & polishing including all cost of materials .T & P etc.complete	75.98	One Sqmt	Rs. 1,106.49	84071.11
14	supplying fitting and fixing fabricated ms grills in door window including all taxes	945.72	kg	Rs. 133.80	126537.34
15	painting one coats on new iron work with approved primer including cost of primer & labour	67.84	One Sqmt	Rs. 55.37	3756.30
16	Priming one coat over plaster surface with water bound cement primer with cost of all material	587.88	One Sqmt	Rs. 71.17	41839.42
17	Wall painting two coats with weather coat with cost of materials and labours	664.32	One Sqmt	Rs. 80.23	53298.39

18	painting two coats with approved new iron work with all cost	67.81	One Sqmt	Rs. 76.51	5188.14
----	--	-------	----------	-----------	---------

TOTAL = 2014011.20

say = 2014011.00

(RUPEES TWENTY LAKHS FOURTEEN THOUSAND ELEVEN ONLY)

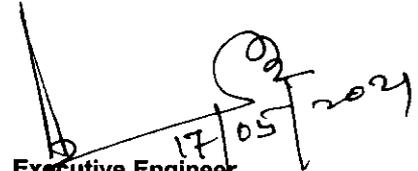
Tender schedule for the project:--CONSTRUCTION OF ADDITIONAL CLASS ROOM AT GOPABANDHU HIGH SCHOOL , JAMUDA approved for Rs.2014011/- (RUPEES TWENTY LAKHS FOURTEEN THOUSAND ELEVEN ONLY) with 18 (EIGHTEEN) item only.

Add for G.S.T cost 12% (CGST6%+SGST 6%) & Labour cess 1% will be added at the time of agreement .


12/05/21

Asst. Executive Engineer
Saharpada Block

Block Development Officer
Saharpada Block


17/05/2021

Executive Engineer
DRDA,Keonjhar

My / Our quoted rate is % Excess / Less
/ Equal to the corresponding estimate rate

(write both in words and figures)

NOTES:-

1. The Contractor should not write anything except quoting of percentage,excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned,the Tender is liable for rejection.
2. Strike out which are not applicable.
3. Percentage quoted by the contractor shall be accurately filled in figure and words,so that there is no discrepancy.
4. If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
5. The percentage quoted in the tender without mentioning excess or less without treated as excess.
6. The contractor should write percentage excess or less up to two decimal point only.If he/her writes the percentage excess or less more than two decimal points it will be treated as cancelled.

Signature of the Contractor
with address.

BILL OF QUANTITY (BOQ)

8/1

NAME OF THE WORK: - Construction of Add.Cla Room at Machhgarh High School, Machhgarh for the year 2020-21

Amount put to Tender : Rs. 3,158,886.00
 EMD : 1% of the Amount put to Tender
 Class of Contractor : ~~B~~ & C' class only (B' & C')
 Cost of Tender Paper : Rs.6000.00
 Date required for completion : 4(Four) calender Month

Sl. no.	Item of Work	Quantity	Unit	Rate	Amount
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads, lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth . as per direction of Engineer-in-charge	108.16	Cum	185.90	20107.00
2	Supplying, filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty and all taxces of materials cost of all labour with T&P etc. complete. as per direction of Engineer-in-charge	187.69	Cum	454.80	85361.00
3	C.C (1:3:6) using 40 mm hg metal in foundation with 40 mm size hand Broken metal including cost, conveyance, royalty etc complete as per direction of Engineer-in-charge	52.06	Cum	4311.17	224440.00
4	RCC M20 grade with 20mm and down graded black hard granite crusher broken chips including hosting and laying				
	(A) Column foundation & Plinth	13.92	Cum	4743.98	66036.00
	(B) Grade beam	9.39	Cum	5280.45	49583.00
	(C) Column & beam	21.50	Cum	10479.33	225306.00
	(D) Lintel	5.54	Cum	8648.33	47912.00
	(E) Chajja & Roof slab	34.15	Cum	10634.61	363172.00
5	Straightening bent up or coiled M.S. rod or HYSD steel (Fe- 415), cutting, bending, cracking, hooking, welding or jointing (if required), the M.S rod or HYSD steel and binding, tying the grills, hoisting, lowering and placing in proper position as requreas per direction of Engineer-in-charge	77.80	Qntl	7569.78	588929.00
6	Fly ash.Brick masonry in cement mortar (1:6) in fdn and Plinth wall including cost ,conveyance etcas per direction of Engineer-in-charge .	57.00	Cum	4064.66	231686.00
7	Fly ash.Brick masonry in cement mortar (1:6) in Superstructure including cost ,conveyance etcas per direction of Engineer-in-charge .	59.87	Cum	4102.61	245623.00

8	20 mm thick grading plaster in CM (1:4) to roof slab including all cost carriage rayalty etc complete	314.92	Sqm	213.86	67349.00
9	12 mm thick cement plaster in C.M.(1:6) in external surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	494.13	Sqm	135.40	66905.00
10	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	449.22	Sqm	192.85	86632.00
11	12 mm thick cement plaster in C.M.(1:4) with neat cement punning for skriting including cost ,conveyance etc as per direction of Engineer-in-charge	129.91	Sqm	154.42	20061.00
12	Supplying fitting & fixing of vetrified tiles in floors, treads or steps and landing on 20 mm thick bed of C.M(1:1) jointed with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing	322.60	Sqm	1199.88	387081.00
13	Fixing the tiles in dados skirting risers of on 12 mm thick C.P. (1:3) jointed with neat cement Slurry	82.89	Sqm	1106.49	91717.00
14	Supplying fitting & fixing of M.S.Gril for Windoo including all cost of material & Laour charges as per direction of Engineer-in-charge.	1159.85	Kg	133.80	155188.00
15	Priming 1 coat with primer on new iron work with approved primer including cost of primer etc complete	95.87	Sqm	55.37	5308.00
16	Priming 1 coat with wall primer with approved wall primer including cost of primer etc complete	813.44	Sqm	71.17	57893.00
17	Finishing wall with approved weather 2 coats with including all cost etc complete	813.44	Sqm	80.23	65262.00


18	Painting 2-coats with enamel paint over a coat of priming to door and windows.	95.87	Sqm	76.51	7335.00
Total 18(Eighteen) nos of item only				Total	3158886.00


(Rupees Thirtyone Lakh Fityeight Thousand Eight Hundred Eightysix)Only

Tender Schedule for the project- Construction of Addl. Class room at Machhgarh High School, Machhgarh GP under OMBADC, Saharpada Block is approved for Rs 3158886.00 (Rupees Thirtyone Lakh Fityeight Thousand Eight Hundred Eightysix)only with 18 nos items only

G.S.T Cost in 12% (CGST 6% +SGST 6%) & with Labour cess 1% will be added at the time of Agreement.

Approved for 18(Eighteen) items only


12/05/21
Asst Exe. Engineer
Saharpada Block


17/05/2021
APD(Tech)
DRDA Keonjhar

TO BE FILLED BY THE TENDERER

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost
Excess in Percentage
Less in Percentage

in Figure	
	%
	%
	%

In Words

Notes:-

- 1) The Tenderer should quote the percentage up to one decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quoted their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

APD (Tech)
DRDA Keonjhar

Block Development Officer
Saharpada Block

TENDER SCHEDULE

85

SI No.	ITEM OF WORK	Quantity	Unit	Rate	Amount
DETAILED ESTIMATE FOR THE WORK :-CONSTRUCTION OF ADDITIONAL CLASS ROOM AT UDAYAPUR HIGH SCHOOL		AMOUNT PUT TO TENDER :- RS. 2014011.00			
		CLASS OF CONTRACTOR :- C & B			
		COST OF TENDER PAPER :- RS. 6000.00			
		EARNEST MONEY DEPOSITE 1% : RS. 20140.00			
		TIME OF COMPLETION : 4 MONTHS			
1	2	3	4	5	6
1	E/W in excavation of foundation in hardsoil within initial lead & lift including levelling and dressing the bed complete.	95.02	One cum	Rs. 185.90	17664.22
2	Filling F & P with sand well watered and rammed complete.	103.67	One cum	Rs. 454.80	47149.12
3	C.C.(1:3:6) with using 4cm size H.G.H B metal including all cost carriage royalty ect complete.	23.40	One cum	Rs. 4,311.17	100881.38
4	Brick work with Fly ash.Bricks in cement mortar (1:6) in Fdn & Pl of size 10"x5"x3" having crushing strength not less than 75 kg/cm ² dimensional tolerance ± 8% with carriage and royalty	33.15	One cum	Rs. 4,064.66	134743.48
5	Reinforcement cement concrete M - 20 grade with 20mm and down grade block hard granite (Crusher broken) stone chips including hoisting and laying including cost, conveyance, royalties, taxes and centering and shuttering etc. complete as per the direction of the Eng. In Charge.				
	a) Column base	11.75	One cum	Rs. 4,743.98	55741.77
	b) Plinth band	5.92	One cum	Rs. 5,280.45	31260.26
	c) Lintel band	3.38	One cum	Rs. 8,648.33	29231.36
	d) Chajja	1.82	One cum	Rs.10,634.61	19354.99
	e) Column & Roof beam	12.61	One cum	Rs.10,479.33	132144.35
	f) Slab	20.31	One cum	Rs.10,634.61	215988.93

6	Providing HYSD bar reinforcement for R.C.C. work including Straightening, cutting, bending, binding, welding, tying the grills, laying and placing in proper position as per approved design and drawing including cost, conveyance of 18 to 20 gauge binding wire cost and conveyance of HYSD bars complete in all respect as per specification for road & Bridge and direction of Eng - in Charge.	54.30	One Qntl	Rs. 7,569.78	411039.05
7	Brick work with Fly Ash.B.Bricks in cement mortar (1:6) in superstructure of size 10"x5"x3" having crushing strength not less than 75 kg/cm ² with dimensional tolerance ± 8% with carriage and royalty	44.67	One cum	Rs. 4,102.61	183267.69
8	20mm thick cement plaster in cm (1:4) in grading plaster for roof slab with carriage and royalty	160.07	One Sqmt	Rs. 213.86	34232.57
9	16mm thick cement plaster (1:6) finished smooth to inside rough surface of brick walls after racking out the joint including watering and curing with cost and conveyance, royalties and taxes of all materials and labour charges	291.19	One Sqmt	Rs. 192.85	56155.99
10	12mm thick cement plaster (1:6) finishing smooth to outside smooth surface of brick walls after racking out the joint including watering and curing with cost, conveyance, royalties and taxes of all materials and cost of all labour charges required for	325.94	One Sqmt	Rs. 135.40	44132.28
11	12mm thick cement plaster (1:4) with neat cement punning for skirting with carriage and royalty	29.24	One Sqmt	Rs. 154.42	4515.24
12	Supplying fitting fixing of Vetrified floor tile colour/printed series(homogeneous) in floor of size 600mm x 600 mm laid on 20 mm thick cement mortar (1:1) and filling joint with white cement of approved quality including all cost of materials .T & P etc.complete	151.53	One Sqmt	Rs. 1,199.88	181817.82
13	Supplying fitting fixing of tile in dado and skirting and riser of step on 12 mm thick cp in cement mortar (1:3) with cement sultry mixwith pigment to match the shade of the tile with rubbing & polishing including all cost of materials .T & P etc.complete	75.98	One Sqmt	Rs. 1,106.49	84071.11
14	supplying fitting and fixing fabricated ms grills in door window including all taxes	945.72	kg	Rs. 133.80	126537.34
15	painting one coats on new iron work with approved primer including cost of primer & labour	67.84	One Sqmt	Rs. 55.37	3756.30
16	Priming one coat over plaster surface with water bound cement primer with cost of all material	587.88	One Sqmt	Rs. 71.17	41839.42
17	Wall painting two coats with weather coat with cost of materials and labours	664.32	One Sqmt	Rs. 80.23	53298.39

18	painting two coats with approved new iron work with all cost	67.81	One Sqmt	Rs. 76.51	5188.14
----	--	-------	----------	-----------	---------


TOTAL = 2014011.20

say = 2014011.00

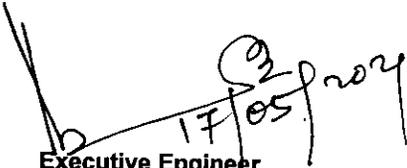
(RUPEES TWENTY LAKHS FOURTEEN THOUSAND ELEVEN ONLY)

Tender schedule for the project:--CONSTRUCTION OF ADDITIONAL CLASS ROOM AT UDAYAPUR HIGH SCHOOL approved for Rs.2014011/- (RUPEES TWENTY LAKHS FOURTEEN THOUSAND ELEVEN ONLY) with 18 (EIGHTEEN) item only.

Add for G.S.T cost 12% (CGST6%+SGST 6%) & Labour cess 1% will be added at the time of agreement .


12/05/21
Asst. Executive Engineer
Saharpada Block

Block Development Officer
Saharpada Block


17/05/2021
Executive Engineer
DRDA,Keonjhar

My / Our quoted rate is % Excess / Less
/ Equal to the corresponding estimate rate

(write both in words and figures)

NOTES:-

1. The Contractor should not write anything except quoting of percentage,excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned,the Tender is liable for rejection.
2. Strike out which are not applicable.
3. Percentage quoted by the contractor shall be accurately filled in figure and words,so that there is no discrepancy.
4. If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
5. The percentage quoted in the tender without mentioning excess or less without treated as excess.
6. The contractor should write percentage excess or less up to two decimal point only.If he/her writes the percentage excess or less more than two decimal points it will be treated as cancelled.

Signature of the Contractor
with address.

TENDER SCHEDULE 26

SI No.	ITEM OF WORK	Quantity	Unit	Rate	Amount
DETAILED ESTIMATE FOR THE WORK :-CONSTRUCTION OF BOUNDARY WALL AT UDAYAPUR H.S		AMOUNT PUT TO TENDER :- RS. 978868.00			
		CLASS OF CONTRACTOR :- D & C			
		COST OF TENDER PAPER :- RS. 6000.00 4000.00 ✓			
		EARNEST MONEY DEPOSIT 1% : RS. 9788.00			
		TIME OF COMPLETION : 4 MONTHS			
1	2	3	4	5	6
1	E/W in excavation of foundation in hardsoil within initial lead & lift including levelling and dressing the bed complete.	125.79	One cum	Rs. 185.90	23384.36
2	Filling F & P with sand well watered and rammed complete.	18.32	One cum	Rs. 454.80	8331.94
3	C.C.(1:3:6) with using 4cm size H.G.H B metal including all cost carriage royalty ect complete.	14.50	One cum	Rs. 4,311.17	62511.97
4	Brick work with Fly ash.Bricks in cement mortar (1:6) in Fdn & Pl of size 10"x5"x3" having crushing strength not less than 75 kg/cm ² dimensional tolerance ± 8% with carriage and royalty	17.76	One cum	Rs. 4,064.66	72188.36
5	Reinforcement cement concrete M - 20 grade with 20mm and down grade block hard granite (Crusher broken) stone chips including hoisting and laying including cost, conveyance, royalties, taxes and centering and shuttering etc. complete as per the direction of the Eng. In Charge.				
	A) Column & Roof beam	39.18	One cum	Rs. 5,280.45	206888.03
6	Providing HYSD bar reinforcement for R.C.C. work including Straightening, cutting, bending, binding, welding, tying the grills, laying and placing in proper position as per approved design and drawing including cost, conveyance of 18 to 20 gauge binding wire cost and conveyance of HYSD bars complete in all respect as per specification for road & Bridge and direction of Eng - in Charge.	33.30	One Qntl	Rs. 7,569.78	252088.81
7	Brick work with Fly Ash.B.Bricks in cement mortar (1:6) in superstructure of size 10"x5"x3" having crushing strength not less than 75 kg/cm ² with dimensional tolerance ± 8% with carriage and royalty	50.23	One cum	Rs. 4,102.61	206074.10
8	16mm thick cement plaster (1:6) finished smooth to inside rough surface of brick walls after racking out the joint including watering and curing with cost and conveyance, royalties and taxes of all materials and labour charges	428.18	One Sqmt	Rs. 192.85	82574.43
9	Priming one coat over plaster surface with water bound cement primer with cost of all material	428.18	One Sqmt	Rs. 71.17	30473.57

10	Wall painting two coats with weather coat with cost of materials and labours	428.18	One Sqmt	Rs. 80.23	34352.88
----	--	--------	----------	-----------	----------

TOTAL = 978868.45

say = **978868.00**

(RUPEES NINE LAKHS SEVENTY EIGHT THOUSAND EIGHT HUNDRED SIXTY EIGHT ONLY)

Tender schedule for the project:--CONSTRUCTION OF BOUNDARY WALL AT UDAYAPUR H.S approved for Rs.978868/- (RUPEES NINE LAKHS SEVENTY EIGHT THOUSAND EIGHT HUNDRED SIXTY EIGHT ONLY) with 10(TEN) item only.

Add for G.S.T cost 12% (CGST6%+SGST 6%) & Labour cess 1% will be added at the time of agreement .

9/11
12/05/21
Asst. Executive Engineer
Saharpada Block

Block Development Officer
Saharpada Block

17/05/2021
Executive Engineer
DRDA,Keonjhar

My / Our quoted rate is % Excess / Less
/ Equal to the corresponding estimate rate

(write both in words and figures)

NOTES:-

1. The Contractor should not write anything except quoting of percentage,excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned,the Tender is liable for rejection.
2. Strike out which are not applicable.
3. Percentage quoted by the contractor shall be accurately filled in figure and words,so that there is no discrepancy.
4. If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
5. The percentage quoted in the tender without mentioning excess or less without treated as excess.
6. The contractor should write percentage excess or less up to two decimal point only.If he/her writes the percentage excess or less more than two decimal points it will be treated as cancelled.

Signature of the Contractor
with address.

BILL OF QUANTITY (BOQ)

NAME OF THE WORK: - Construction of Science Lab at Machhgarh High School for the year 2020-21

Amount put to Tender : Rs. 1,420,239.00
 EMD : 1% of the Amount put to Tender
 Class of Contractor : D' & C' class only
 Cost of Tender Paper : Rs.6000.00
 Date required for completion : 4(Four) calender Month

S. no.	Item of Work	Quantity	Unit	Rate	Amount
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads, lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth . as per direction of Engineer-in-charge	49.17	Cum	185.90	9141.00
2	Supplying, filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty and all taxces of materials cost of all labour with T&P etc. complete. as per direction of Engineer-in-charge	74.11	Cum	454.80	33705.00
3	C.C (1:3:6) using 40 mm hg metal in foundation with 40 mm size hand Broken metal including cost, conveyance, royalty etc complete as per direction of Engineer-in-charge	19.04	Cum	4311.17	82085.00
4	RCC M20 grade with 20mm and down graded black hard granite crusher broken chips including hosting and laying				
	(A) Column foundation & Plinth	7.79	Cum	4743.98	36956.00
	(B) Grade beam	4.26	Cum	5280.45	22495.00
	(C) Column & beam	9.90	Cum	10479.33	103745.00
	(D) Lintel	2.83	Cum	8648.33	24475.00
	(E) Chajja & Roof slab	16.02	Cum	10634.61	170366.00
5	Straightening bent up or coiled M.S. rod or HYSD steel (Fe- 415), cutting, bending, cracking, hooking, welding or jointing (if required), the M.S rod or HYSD steel and binding, tying the grillis, hoisting, lowering and placing in proper position as requireas per direction of Engineer-in-charge	38.61	Qntl	7569.78	292269.00
6	Fly ash.Brick masonry in cement mortar (1:6) in fdn and Plinth wall including cost ,conveyance etcas per direction of Engineer-in-charge .	25.96	Cum	4064.66	105519.00
7	Fly ash.Brick masonry in cement mortar (1:6) in Superstructure including cost ,conveyance etcas per direction of Engineer-in-charge .	27.27	Cum	4102.61	111878.00

8	20 mm thick grading plaster in CM (1:4) to roof slab including all cost carriage rayalty etc complete	130.23	Sqm	213.86	27851.00
9	12 mm thick cement plaster in C.M.(1:6) in external surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	251.93	Sqm	135.40	34111.00
10	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	164.26	Sqm	192.85	31678.00
11	12 mm thick cement plaster in C.M.(1:4) with neat cement punning for skirting including cost ,conveyance etc as per direction of Engineer-in-charge	42.77	Sqm	154.42	6605.00
12	Supplying fitting & fixing of vetrified tiles in floors, treads or steps and landing on 20 mm thick bed of C.M(1:1) jointed with neat cement slurry mixed with pigment to match the shades of the tiles including rubbing and polishing	112.95	Sqm	1199.88	135526.00
13	Fixing the tiles in dados skirting risers of on 12 mm thick C.P. (1:3) jointed with neat cement Slurry	35.65	Sqm	1106.49	39446.00
14	Supplying fitting & fixing of M.S.Grill for Window including all cost of material & Laour charges as per direction of Engineer-in-charge.	669.14	Kg	133.80	89531.00
15	Priming 1 coat with primer on new iron work with approved primer including cost of primer etc complete	47.94	Sqm	55.37	2654.00
16	Priming 1 coat with wall primer with approved wall primer including cost of primer etc complete	373.42	Sqm	71.17	26576.00
17	Finishing wall with approved weather 2 coats with including all cost etc complete	373.42	Sqm	80.23	29959.00


18	Painting 2-coats with enamel paint over a coat of priming to door and windows.	47.94	Sqm	76.51	3668.00
Total 18(Eighteen) nos of item only				Total	1420239.00

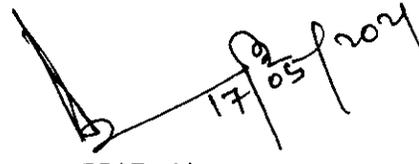
(Rupees Fourteen Lakh Twenty thousand Two Hundred thirtynine)Only

Tender Schedule for the project- Construction of Science Lab Room at Machhgarh High School, Machhgarh GP under OMBADC,Saharpada Block is approved for Rs 1420239.00 (Rupees Fourteen Lakh TwentyThousand Two Hundred Thirtynine)only with 18 nos items only

G.S.T Cost in 12% (CGST 6% +SGST 6%) & with Labour cess 1% will be added at the time of Agreement.

Approved for 18(Eighteen) items only


12/05/21
Asst Exe. Engineer
Saharpada Block


17/05/2021
APD(Tech)
DRDA Keonjhar

TO BE FILLED BY THE TENDERER

1) My/ Our quoted rate is (both in figure and words)

	in Figure	In Words
Equal to Estimate Cost	%	
Excess in Percentage	%	
Less in Percentage	%	

Notes:-

- 1) The Tenderer should quote the percentage up to one decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quoted their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

APD (Tech)
DRDA Keonjhar

Block Development Officer
Saharpada Block

BILL OF QUANTITY (BOQ)NAME OF THE WORK:- CONSTRUCTION OF OMBADC SCIENCE LAB ROOM AT SAHARPADA HIGH SCHOOL,
SAHARPADA

Amount Put to Tender	:	Rs 14,20,240.00
EMD	:	1% of the Amount put to Tender
Class of Contractor	:	D' & C' Class only
Cost of Tender paper	:	Rs 6000.00
Date required for Completion	:	4(Four Calender Month)

Sl. NO	Description of items	Quantity	Unit	Rate	Amount
1	Earthwork excavation in hard soil in foundation and plinth including rough dressing and levelling the bed etc. complete	49.17	Cum	185.90	Rs. 9,140.70
2	Filling in foundation and plinth with sand well watered and rammed including all cost carriage and royalty	74.11	Cum	454.80	Rs. 33,705.23
3	P.C.C (1:3:6) with 40mm size hg metal including all cost carriage and royalty etc. complete	19.04	Cum	4311.17	Rs. 82,084.68
4	Rcc-M20 work with 20mm and down graded size cbhg chips including all cost carriage and royalty etc complete .				
	(i) Column base and footing	7.79	Cum	4743.98	Rs. 36,955.60
	(ii) Grade Beam	4.26	Cum	5280.45	Rs. 22,494.72
	(iii) Column & Beam	9.9	Cum	10479.33	Rs. 103,745.37
	(iv) Lintel	2.83	Cum	8648.33	Rs. 24,474.77
	(v) Roof slab	14.68	Cum	10634.61	Rs. 156,116.07
	(vi) Chajja	1.34	Cum	10634.61	Rs. 14,250.38
5	Providing M.S reinforcement in Rcc work including cutting, bending ,binding and tying the Ms rods and placing in proper position including cost of biding wire etc complete	38.61	Qntl	7569.78	Rs. 292,269.21
6	Brick work with Flyash brick in CM(1:6) in foundation and plinth including all cost conveyance and taxes etc. complete .	25.96	Cum	4064.66	Rs. 105,518.57
7	Brick work with Flyash brick in CM(1:6) in Superstructure including all cost conveyance and taxes etc. complete .	27.27	Cum	4102.61	Rs. 111,878.17
8	20mm thick grade plaster in cm(1:4) over roof slab including all cost etc complete .	130.23	Sqm	213.86	Rs. 27,850.99
9	12mm thick cement plaster in CM(1:6) over outside of Brick masonry wall including all cost etc complete .	251.93	Sqm	135.40	Rs. 34,111.32

10	16mm thick cement plaster in CM(1:6) over inner side of Brick masonry wall including all cost etc complete .	164.26	Sqm	192.85	Rs.	31,677.54
11	12mm thick cement plaster in CM(1:4) with neat cement punning for skriting including all cost etc complete .	42.77	Sqm	154.42	Rs.	6,604.54
12	Supplying fitting fixing of vetrified floor tiles colour/printed series(homogeneous) in floor of size600mmx 600mm laid on 20mm thickcm (1:1) and filling joint with white cement of approved quality including all cost of materials,T & P etc. complete	112.95	Sqm	1199.88	Rs.	135,526.45
13	Supplying fitting fixing of vetrified tiles in dado and skriting and riser of steps laid on 12mm thick cement plaster cm (1:3) with cement slury mixed with pigment to match the shades of tiles rubbing and pollishing including all cost of materials,T & P etc. complete	35.65	Sqm	1106.49	Rs.	39,446.37
14	Supplying fitting and fixing of fabricated ms grills in doors,windows including all taxes etc. complete	669.14	Kg	133.80	Rs.	89,530.93
15	Priming one coat on new iron work with approved primer including cost of primer and labour etc complete .	47.94	Sqm	55.37	Rs.	2,654.44
16	Priming one coat with approved wall primer including cost of primer and labour etc complete .	373.42	Sqm	71.17	Rs.	26,576.30
17	Finishing wall with approved weather coat two coats including all cost carriage etc. complete .	373.42	Sqm	80.23	Rs.	29,959.49


18	Painting two coats with approved paint on new iron work with all cost of materials and labour, T & P etc.	47.94	Sqm	76.51	Rs.	3,667.89
				Total		Rs 14,20,240.00
	Total (18) Eighteen Nos of Items Only					Rs 14,20,240.00

(Rupees Fourteen lakh Twenty thousand Two hundred Fourty) only

Tender shedule for the project-Construction of OMBADC Science Lab Room at Saharpada High School under Saharpada G.P under OMBADC Saharpada Block is approved for Rs 14,20,240.00 (Fourteen Lakh Twenty thousand Two hundred Fourty) only with 18(Eighteen) items only .

G.S.T. cost in 12% (CGST 6% + SGST 6%) and with labour cess 1% will be added at the time of agreement .


 12/05/21
 Asst. Exe. Engineer
 Saharpada Block


 17/05/2021
 Executive Engineer
 DRDA, Keonjhar

TO BE FILLED BY THE TENDERER

1) My/Our quoted rate is (Both in figure and words)

	In Figure	in Words
Equal to Estimated cost	%	
Excess in percentage	%	
Less in percentage	%	

Notes:-

- 1)The tenderer should quoted the percentage up to one decimal point only
- 2)The tenderer should go through the special condition in the DTCN for Percentage rate contract before tendering .
- 3)The tenderer should quoted their percentage only inside the space provided for the purpose .
- 4)The percentage quoted at any other place will not be taken into cosideration

Asst. Exe. Engineer
Saharpada Block

APD(Tech)
DRDA, Keonjhar

Block Development officer
Saharpada Block

BILL OF QUANTITY (BOQ)

39

**NAME OF THE WORK:- CONSTRUCTION OF ADDITIONAL CLSS ROOM AT SAHARPADA HIGH SCHOOL,
SAHARPADA**

Amount Put to Tender	:	Rs 10,15,058.00
EMD	:	1% of the Amount put to Tender
Class of Contractor	:	D' & C' Class only
Cost of Tender paper	:	Rs 6000.00
Date required for Completion	:	4(Four Calender Month)

Sl. NO	Description of items	Quantity	Unit	Rate	Amount
1	Earthwork excavation in hard soil in foundation and plinth including rough dressing and levelling the bed etc. complete	50.44	Cum	185.90	Rs. 9,376.80
2	Filling in foundation and plinth with sand well watered and rammed including all cost carriage and royalty	58.41	Cum	454.80	Rs. 26,564.87
3	P.C.C (1:3:6) with 40mm size hg metal including all cost carriage and royalty etc. complete	15.67	Cum	4311.17	Rs. 67,556.03
4	Rcc-M20 work with 20mm and down graded size cbhg chips including all cost carriage and royalty etc complete .				
	(i) Column base and footing	6.85	Cum	4743.98	Rs. 32,496.26
	(ii) Grade Beam	3.00	Cum	5280.45	Rs. 15,841.35
	(iii) Column & Beam	6.73	Cum	10479.33	Rs. 70,525.89
	(iv) Lintel	1.80	Cum	8648.33	Rs. 15,566.99
	(v) Roof slab	10.62	Cum	10634.61	Rs. 112,939.56
	(vi) Chajja	0.84	Cum	10634.61	Rs. 8,933.07
5	Providing M.S reinforcement in Rcc work including cutting, bending ,binding and tying the Ms rods and placing in proper position including cost of biding wire etc complete	29.49	Qntl	7569.78	Rs. 223,232.81
6	Brick work with Flyash brick in CM(1:6) in foundation and plinth including all cost conveyance and taxes etc. complete .	17.13	Cum	4064.66	Rs. 69,627.63
7	Brick work with Flyash brick in CM(1:6) in Superstructure including all cost conveyance and taxes etc. complete .	19.12	Cum	4102.61	Rs. 78,441.90
8	20mm thick grade plaster in cm(1:4) over roof slab including all cost etc complete .	83.00	Sqm	213.86	Rs. 17,750.38
9	12mm thick cement plaster in CM(1:6) over outside of Brick masonry wall including all cost etc complete .	173.27	Sqm	135.40	Rs. 23,460.76


10	16mm thick cement plaster in CM(1:6) over inner side of Brick masonry wall including all cost etc complete .	116.21	Sqm	192.85	Rs. 22,411.10
11	12mm thick cement plaster in CM(1:4) with neat cement punning for skriting including all cost etc complete .	30.65	Sqm	154.42	Rs. 4,732.97
12	Supplying fitting fixing of vetrified floor tiles colour/printed series(homogeneous) in floor of size600mmx 600mm laid on 20mm thickcm (1:1) and filling joint with white cement of approved quality including all cost of materials,T & P etc. complete	81.42	Sqm	1199.88	Rs. 97,694.23
13	Supplying fitting fixing of vetrified tiles in dado and skriting and riser of steps laid on 12mm thick cement plaster cm (1:3) with cement slury mixed with pigment to match the shades of tiles rubbing and polishing including all cost of materials,T & P etc. complete	25.08	Sqm	1106.49	Rs. 27,750.77
14	Supplying fitting and fixing of fabricated ms grills in doors, windows including all taxes etc. complete	356.88	Kg	133.80	Rs. 47,750.54
15	Priming one coat on new iron work with approved primer including cost of primer and labour etc complete .	24.41	Sqm	55.37	Rs. 1,351.58
16	Priming one coat with approved wall primer including cost of primer and labour etc complete .	258.82	Sqm	71.17	Rs. 18,420.22
17	Finishing wall with approved weather coat two coats including all cost carriage etc. complete .	258.82	Sqm	80.23	Rs. 20,765.13

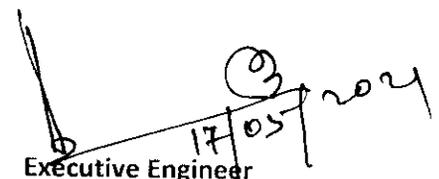
18	Painting two coats with approved paint on new iron work with all cost of materials and labour, T & P etc.	24.41	Sqm	76.51	Rs. 1,867.61
				Total	Rs 10,15,058.00
	Total (18) Eighteen Nos of Items Only				Rs 10,15,058.00

(Rupees Ten lakh Fifteen thousand and Fiftyeight) only

Tender shedule for the project-Construction of Additional Class room at Saharpada High School under Saharpada G.P under OMBADC Saharpada Block is approved for Rs 10,15,058.00 (Ten Lakh Fifteen thousand and Fiftyeight) only with 18(Eighteen) items only .

G.S.T. cost in 12% (CGST 6% + SGST 6%) and with labour cess 1% will be added at the time of agreement .


 12/05/21
 Asst.Exe.Engineer
 Saharpada Block


 17/05/2021
 Executive Engineer
 DRDA,Keonjhar

TO BE FILLED BY THE TENDERER

1) My/Our quoted rate is (Both in figure and words)

	In Figure	in Words
Equal to Estimated cost	%	
Excess in percentage	%	
Less in percentage	%	

Notes:-

- 1)The tenderer should quoted the percentage up to one decimal point only
- 2)The tenderer should go through the special condition in the DTCN for Percentage rate contract before tendering .
- 3)The tenderer should quoted their percentage only inside the space provided for the purpose .
- 4)The percentage quoted at any other place will not be taken into cosideration

Asst.Exe.Engineer
Saharpada Block

APD(Tech)
DRDA,Keonjhar

Block Development officer
Saharpada Block

BILL OF QUANTITY (BOQ)

40

NAME OF THE WORK:- CONSTRUCTION OF BOUNDARY WALL AT SAHARPADA HIGH SCHOOL

Amount Put to Tender	:	Rs 9,78,853.00
EMD	:	1% of the Amount put to Tender
Class of Contractor	:	D' & C' Class only
Cost of Tender paper	:	Rs 6000.00 4000.00
Date required for Completion	:	4(Four Calender Month)


Sl. NO	Description of items	Quantity	Unit	Rate	Amount
1	Earthwork excavation in hard soil in foundation and plinth including rough dressing and levelling the bed etc. complete	125.79	Cum	185.90	Rs. 23,384.36
2	Filling in foundation and plinth with sand well watered and rammed including all cost carriage and royalty	18.32	Cum	454.80	Rs. 8,331.94
3	Cement concrete (1:3:6) with 40mm size hg metal including all cost carriage and royalty etc. complete	14.50	Cum	4311.17	Rs. 62,511.97
4	Rcc-M20 using 20mm and down grade size cbhg chips including all cost carriage and royalty etc complete .	39.18	Cum	5280.45	Rs. 206,888.03
5	Providing M.S reinforcement in Rcc work including cutting, bending ,binding and tying the Ms rods and placing in proper position including cost of biding wire etc complete	33.30	Qntl	7569.78	Rs. 252,073.67
6	Brick work with Flyash brick in CM(1:6) in foundation and plinth including all cost conveyance and taxes	17.76	Cum	4064.66	Rs. 72,188.36
7	Brick work with Flyash brick in CM(1:6) in Superstructure including all cost conveyance and taxes	50.23	Cum	4102.61	Rs. 206,074.10
8	16mm thick cement plaster in CM(1:6) over inner side of Brick masonry wall including all cost etc complete .	428.18	Sqm	192.85	Rs. 82,574.51
9	Priming one coat with approved wall primer including cost of primer and labour etc complete .	428.18	Sqm	71.17	Rs. 30,473.57

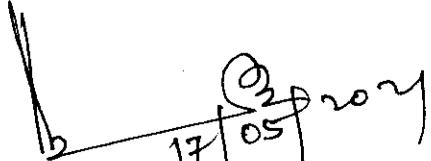
10	Finishing wall with approved weather coat two coats including all cost carriage etc. complete .	428.18	Sqm	80.23	Rs.	34,352.88
				Total		Rs 9,78,853.00
	Total (10) Ten Nos of Items Only					Rs 9,78,853.00

(Rupees Nine lakh Seventy Eight thousand Eight hundred fifty three) only

Tender shedule for the project-Construction of Boundary wall at Saharpada High School under Saharpada G.P under OMBADC Saharpada Block is approved for Rs 9,78,853.00 (Nine Lakh Seventy eight thousand Eight hundred fifty three) only with 10(Ten) items only .

G.S.T. cost in 12% (CGST 6% + SGST 6%) and with labour cess 1% will be added at the time of agreement .


 12/05/21
 Asst.Exe.Engineer
 Saharpada Block


 17/05/2021
 Executive Engineer
 DRDA,Keonjhar

TO BE FILLED BY THE TENDERER

1) My/Our quoted rate is (Both in figure and words)

	In Figure	in Words
Equal to Estimated cost	%	
Excess in percentage	%	
Less in percentage	%	

Notes:-

- 1)The tenderer should quoted the percentage up to one decimal point only
- 2)The tenderer should go through the special condition in the DTCN for Percentage rate contract before tendering .
- 3)The tenderer should quoted their percentage only inside the space provided for the purpose .
- 4)The percentage quoted at any other place will not be taken into cosideration

Asst.Exe.Engineer
Saharpada Block

APD(Tech)
DRDA,Keonjhar

Block Development officer
Saharpada Block