

BILL OF QUANTITY


NAME OF THE WORK : Construction of AWC building at Kendua, Bodapalasa GP

SL	Description of Items	Unit	Quantity	Rate		Amount
1	2	3	4	5		6
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads, lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth and making it fit for laying concrete and depositing the excavated materials away from the work site with all leads and lifts including dewatering if necessary from foundation complete as directed by Engineer-in-Charge.	One Cubic Meter	77.13	180.04		Rupees One Hundred Eighty And Four Paise Only 13886.59
2	Filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty of materials with labour and T&P required for the work.	One Cubic Meter	52.64	359.61		Rupees Three Hundred Fifty Nine And Sixty One Paise Only 18930.07
3	Cement concrete of proportion (1:4:8) with 40mm & down graded size hand broken H.G. metal for foundation concrete approved quality from approved quarry including hoisting, lowering and laying concrete to the required level ramming, watering, curing etc. complete including cost, conveyance & royalty of materials with all labour charges.	One Cubic Meter	20.97	3906.40		Rupees Three Thousand Nine Hundred Six And Forty Paise Only 81908.20
4	Brick work with Fly Ash Bricks in cement mortar (1:6) in F & P of size 9"x5"x3" having crushing strength not less than 75 kg/cm ² with dimensional tolerance ± 8% including splays cutting circular moulding chamfering and corbelling and similar such type of works with all necessary projections watering and curing after immersing the bricks in water at least for six hours before use including cost, conveyance & royalty of materials with labour charges etc complete in all respect.	One Cubic Meter	22.32	3986.20		Rupees Three Thousand Nine Hundred Eighty Six And Twenty Paise Only 88965.18
5	Brick work with Fly Ash Bricks in cement mortar (1:6) in Superstructure of size 9"x5"x3" having crushing strength not less than 75 kg/cm ² with dimensional tolerance ± 8% including splays cutting circular moulding chamfering and corbelling and similar such type of works with all necessary projections watering and curing after immersing the bricks in water at least for six hours before use including cost, conveyance & royalty of materials with labour charges etc complete in all respect.	One Cubic Meter	54.49	4024.12		Rupees Four Thousand Twenty Four And Twelve Paise Only 219278.66
6	RCC M-20 work with cement concrete with crushed granite 20mm down grade course aggregate of approved quality mixing by concrete mixer including hoisting, lowering and laying the concrete in position to proper slope and level and compacting by Vibrators in layers .not exceeding 0.15m depth including watering, curing for required period 28 days, centering & shuttering and finishing exposed surface smooth providing grooves wherever necessary including cost, conveyance, royalty and other taxes of all materials labour, T&P materials required for this item including hire and running charges of the machineries complete as directed by the Engineer-in-charge.					
a	Column Base	One Cubic Meter	9.99	4821.30		Rupees Four Thousand Eight Hundred Twenty One And Thirty Paise Only 48180.69
b	Column in Superstructure	One Cubic Meter	5.71	10350.46		Rupees Ten Thousand Three Hundred Fifty And Forty Six Paise Only 59112.70


c	Plinth Beam	One Cubic Meter	7.98	4670.54	Rupees Four Thousand Six Hundred Seventy And Fifty Four Paise Only	37287.50
d	Beam	One Cubic Meter	3.07	10350.46	Rupees Ten Thousand Three Hundred Fifty And Forty Six Paise Only	31749.29
e	Lintal Band	One Cubic Meter	2.70	8300.32	Rupees Eight Thousand Three Hundred And Thirty Two Paise Only	22372.36
f	Chhaja	One Square Meter	18.53	751.46	Rupees Seven Hundred Fifty One And Forty Six Paise Only	13926.09
g	Slab	One Cubic Meter	10.81	8848.24	Rupees Eight Thousand Eight Hundred Forty Eight And Twenty Four Paise Only	95652.53
7.	Straightening bent up or coiled M.S. rod or HYSD steel (Fe-415), cutting, bending, cracking, hooking, welding or jointing (if required), the M.S rod or HYSD steel and binding, tying the grills, hoisting, lowering and placing in proper position as required for RCC works including cost, conveyance and taxes of M.S. rod or HYSD steel and binding wires of 18 to 20 gauge and labour charges required for the work etc complete.	One Quintal	29.39	5445.35	Rupees Five Thousand Four Hundred Forty Five And Thirty Five Paise Only	160059.39
8	16mm (5/8") thick cement plaster (1:6) finishing smooth to inside rough surface of 9"/10" thick brick walls after racking out the joint including watering and curing with cost, conveyance, royalties and taxes of all materials and cost of all labour charges required for the work etc complete.	One Square Meter	290.46	199.50	Rupees One Hundred Ninety Nine And Fifty Paise Only	57946.55
9	12mm thick cement plaster (1:6) finishing smooth to Outside rough surface of 9"/10" thick brick walls after racking out the joint including watering and curing with cost, conveyance, royalties and taxes of all materials and cost of all labour charges required for the work etc complete.	One Square Meter	261.62	141.30	Rupees One Hundred Forty One And Thirty Paise Only	36967.61
10	6 mm thick cement plaster in cement mortar (1:4) to RCC surface finished smooth including deep chipping and slurry treatment including punning including cost, conveyance & royalty of materials.	One Square Meter	104.29	152.70	Rupees One Hundred Fifty Two And Seventy Paise Only	15924.82
11	Supplying ,fitting and fixing vertrified tiles in floors,treads or steps of size 600mm x 600mm of approved make conforming to IS: 13755 laid on 20mm thick cement mortar (1:4) (1 cement : 4 course sand) and filling joints with white	One Square Meter	83.57	1025.90	Rupees One Thousand Twenty Five And Ninety Paise Only	85730.93
12	Fixing colour Glazed tiles in wall on 12 mm thick cement plaster(1:3) jointed with neat cement slurry mixed with pigments to matche shade of the tiles including polishing complete as per direction of Engineer-in-charge.	One Square Meter	9.78	692.70	Rupees Six Hundred Ninety Two And Seventy Paise Only	6774.96

13	Supplying, fitting and fixing steel angle iron door & window with steel angle iron frame manufactured from standard rolled steel angle section of 40mmx40mmx6mm size with corners of the frame duly mattered and electrically welded with fishtail hold fasts made out of MS flat size 200mmx50mmx30mm wide and 5mm thick welded to the frame @ 6 nos per frame with 10mm dia MS round bar to be welded at the day with MS hinges of size 100mm 14SWG thick @ 3 nos and 15mm size 1 no. for single & double leaf shutter, aldrop staple and tower bolt hinges duly welded to the frame with one coat of anti corrosive red oxide zinc chrome primer including cost, conveyance, taxes of all materials with all labour charges for the work.	One Kilogram	1151.00	86.30	Rupees Eighty Six And Thirty Paise Only	99331.30
14	Painting two coats with any approved synthetic enamel paint of approved quality shade and make over a coat of priming to new wood work/ iron work including cost of the primer and paint, sand papering polishing the surface with cost, conveyance, royalty, taxes with all labour charges.	One Square Meter	59.13	182.60	Rupees One Hundred Eighty Two And Sixty Paise Only	10797.29
15	Finishing walls with water proofing cement paint to exterior surface of wall with approved shade with two coats to give an even shade including cost of paint and cost of all labour with T&P.	One Square Meter	178.01	31.70	Rupees Thirty One And Seventy Paise Only	5643.07
Total						1210425.79

Approved 15 items only


 16/2/21
 Block Development Officer,
 Keonjhar Sadar

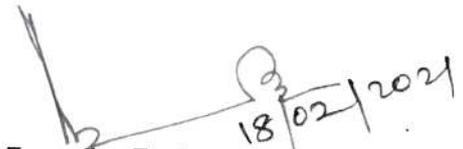


 18/02/2021
 Executive Engineer
 DRDA, Keonjhar

My / our quoted rate is _____ % (both in figure and words) excess over / less than / equal to the above estimated cost.

NOTES:

1. The contractor should not write any thing excepting quoting of percentage and in case anything else
2. Strike out which is not applicable.
3. Percentage should be quoted up to 2 (two) digits after the decimal point.
4. Rate of all items are inclusive of cost, carriage, royalty and other taxes of material.

Tenderer

No. of Correction:

No. of over writing:

No. of interpolation: