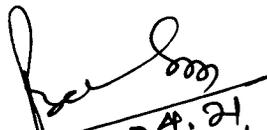


## APPROVED TENDER SCHEDULE

Name of the work: Const. of Two nos Additional Class Room at chilida U.G.U.P.S <i>G.P. - Chamera</i>		Amount put to tender:Rs 1401416.00			
		Class of contractor: D & C			
		Cost of Tender Paper : Rs. 6,000/-			
		Earnest money Deposit 1% :Rs.14014			
		Time of Completion: <i>4</i> months			
Sl. No	Description of Item	Unit	Quantity	Rate	Amount
1	Earth work in hard soil or gravelling soil for excavation of foundation including dressing and levelling of beds and depositing the soil away from the work side with all lead & lift including cost of all labour, T & P, dewatering, shoring and shuttering for the work etc. complete & as per direction of Engineer in charge	Cum	59.78	184.59	11034.79
2	Supplying and Filling in foundation and plinth with sand , well watered and rammed with all leads and lifts, cost convenience and royalty and all taxes of materials , cost of labour, T & P, dewatering, required for the works etc, complete in all respect as directed by engineer-in-charge.	Cum	67.70	370.50	25082.85
3	Cement concrete of proportion (1:4:8) with using 40 MM size hbg metal free from weathered and skin with including cost, convenience, royalty and taxes of all materials, labour etc including curing, dewatering if required in all respect including centering and shuttering etc.complete & as per direction of Engineer in charge	Cum	21.49	3744.11	80470.85
4	R.R H.G stone Masonary in cm (1:6) in foundation and plinth with all cost conveyance Royalty etc	cum	30.85	3192.96	98502.82
5	Fly ash brick(25cmx12cmx8cm) masonry in CM(1:6)for superstructure in foundation and plinth having a crushing strength of not less than 75 kg/sqcm including splay cutting, circular moulding, chamfering and curbing and watering, curing etc including cost, conveyance, royalty and all taxes of materials with cost. of labour, T& P etc. complete required for the work complete in all respect as directed by the engineering -in-charge.				
a.	In foundation & plinth.	Cum	5.19	4560.03	23673.44
b.	In superstructure .	Cum	25.44	4593.36	116865.89
6	Reinforcement cement concrete M-20 grade with 20 mm nominal size down graded nominal size aggregate mechanically mixed and vibrated in foundation and bed protection of speciation for road and Bridge work & Direction of the Eng in charge the work etc complete as direction by the engineering-in-charge.	cum	42.73	4771.27	203876.37
7	Suppling, coiled M.S rod or HYSD steel (Fe-415),cutting, bending,cracking,hooking,olding or jointing (if required) reinforcement including labour charges for cutting, bending, binding and straightening and tying the grills and placing in position including cost of binding wire 18 to 20 gauge as per drawing and technical specificalton as directed by the engineering-in-charge.	Qtl	42.73	6552.60	279992.60

  
 30.04.21  
 AEE/1/

  
 03.05.21  
 Block Development Officer  
 PATNA, KEONJHAR

8	Rigid smooth centring and shuttering at all heights for R,C,C work including false work and distementiling them after casting				
	1) R.C.C. Column & beam	sqmt	112.76	736.64	83063.53
	2) lintel	sqmt	32.73	263.33	8618.79
	3) Roof slab	sqmt	128.06	439.89	56332.31
9	Fixing Verified tiles in floors ,treads and landings on 25 mm thick bed of cement mortar (1:1) joined with neat cement slurry mixed with pigment to match the shade of the tiles including rubbing and polishing including cost of tile	sqmt	123.39	1088.60	134322.35
10	Fixing of verified tiles in dados ,skirting and in rises of steps on 12mm thick bed of cement plaster (1:3) joined with neat cement slurry mixed with pigment to match the shade of the tiles including rubbing and polishing including cost of tile	sqmt	17.40	1207.56	21006.09
11	12 mm thick cement plaster in C.M. (1:6) finishing smooth to outer side brickwork after ranking out the joints including watering and curing with cost, conveyance, royalty of all materials , labour with T & P required for the work including all taxes etc. complete in all respect all floors as directed by engineering-in-charge.	Sqm	131.91	137.14	18090.14
12	16 mm thick cement plaster in C.M. (1:6) finishing smooth to inner side brickwork after ranking out the joints including watering and curing with cost, conveyance, royalty of all materials , labour with T & P required for the work including all taxes etc. complete in all respect all floors as directed by engineering-in-charge.	Sqm	131.91	210.76	27801.35
13	20 mm thick cement plaster in C.M. (1:4) Roof slad Grading plaster after ranking out the joints including watering and curing with cost, conveyance, royalty of all materials , labour with T & P required for the work including all taxes etc. complete in all respect all floors as directed by engineering-in-charge.	sqm	121.35	230.23	27938.41
14	20 mm thick cement plaster in C.M. (1:6) finishing smooth to outer side brickwork after ranking out the joints including watering and curing with cost, conveyance, royalty of all materials , labour with T & P required for the work including all taxes etc. complete in all respect all floors as directed by engineering-in-charge.	Sqm	19.01	214.68	4081.23
15	12 mm thick cement plaster in C.M. (1:4) in cluding cement punning and skirting with all cost conveyance royalty etc complete	Sqm	144.11	151.52	21834.84
16	Supplying fitting & fixing of M.S shutter in cluding cost of all materials etc .complete as per direction of in charge	kg	776.00	64.00	49664.00
17	Painting two coats in all Doors and windows (two coats with paint s of approved shade and base coat with primer)to new wood and iron work including sand	Sqm	43.48	196.00	8521.42
18	Distempering two coats to walls with distemper of approved shade on new work to give an even shade including cost of disteper	Sqm	276.01	69.20	19099.89
19	Providing and applying paint over external plastered surfaces with 2 coats of weather coat of approved quality and shade using the required quantity of paint	Sqm	253.26	75.43	19104.03

*[Signature]*  
30.04.21  
AEE (1)

*[Signature]*  
03.05.2021  
Block Development Officer  
PATNA, KEONJHAR


20	cement washing one coat	sqm	529.27	14.06	7441.54
21	Priming one coat with approved primer	sqm	529.27	65.34	34582.50
22	Provison of Disply board (4 ft x3ft) and construction Flat from	nos	1.00	4414.00	4414.00
23	Provison of recharge pit of roof top water harvesting & sluge pit (size-5'.0"x5.0"x'4'.0") with cover slab connected with 4" dia PVC pipe with fittings as the direction of the Engineer incharge	nos	1.00	16000.00	16000.00
			Total		1401416.03
			Grand	Total Rs	1401416.00

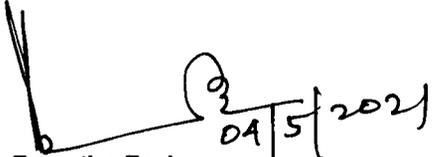
(Rupees fourteen lakhs one thousand four hundred sixteen ) only.

Tender schedule for the project:-Const. of Two nos Additional class room at chilida U.G.U.P.S, Under CHMENA GP Under OMBADC Patna Block is approved for RS 1401416.00-(Rupees fourteen lakhs one thousand four hundred sixteen ) only with 23 (twenty three) items only.

G.S.T.cost in 12% (CGST6% +SGST6%) will be add at the time of agreement.

  
30.04.21  
Asst. Executive Engineer  
Patna

  
07.05.2021  
Block Development Officer  
Patna

  
04/5/2021  
Executive Engineer  
DRDA, Keonjhar

My /Our quoted rate is \_\_\_\_\_ % Excess/Less/Equal  
to the corresponding estimate rate  
(Write both in words and Figures)

**NOTES:-**

1. The Contractor should not write anything except quoting of percentage, excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned, the Tender is liable for rejection.
2. Strike out which are not applicable.
3. Percentage quoted by the contractor shall be accurately filled in figure and words, so that there is no discrepancy.
4. If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
5. The percentage quoted in the tender without mentioning excess or less will be treated as excess.
6. The contractor should write percentage excess or less up to two decimal point only. If he/her writes the percentage excess or less more than two decimal points it will be treated as cancelled.

Signature of the Contractor  
with address.