


APPROVED TENDER SCHEDULE

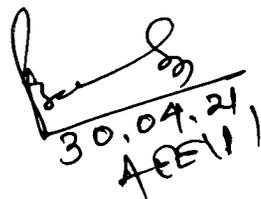
Name of the work: Const. of Boundery Wall and Jana Mandir drinking water facility at ABCDR united Jana mandir <i>G.P. - Chamera</i>		Amount put to tender:Rs 1066503			
		Class of contractor: D &C			
		Cost of Tender Paper : Rs. 6,000/-			
		Earnest money Deposit 1% :Rs.10665			
		Time of Completion: 4 months			
Sl. No	Description of Item	Unit	Quantity	Rate	Amount
1	Earth work in hard soil or gravelling soil for excavation of foundation including dressing and levelling of beds and depositing the soil away from the work side with all lead & lift including cost of all labour, T & P, dewatering, shoring and shuttering for the work etc. complete & as per direction of Engineer in charge	Cum	105.65	184.59	19501.93
2	Supplying and Filling in foundation and plinth with sand , well watered and rammed with all leads and lifts, cost convenience and royalty and all taxes of materials , cost of labour, T & P, dewatering, required for the works etc, complete in all respect as directed by engineer-in-charge.	Cum	22.42	370.50	8306.61
3	Cement concrete of proportion (1:4:8) with using 40 MM size hbg metal free from weathered and skin with including cost, convenience, royalty and taxes of all materials, labour etc including curing, dewatering if required in all respect including centering and shuttering etc. complete & as per direction of Engineer in charge	Cum	21.55	3747.67	80762.29
4	Rc.c (1:2:4) with 12 mm black hard granite crusher broken chips including hosting and laying	cum	6.65	4785.51	31823.64
4	R.R H.G stone Masonary in cm (1:6) in foundation and plinth with all cost conveyance Royalty etc	cum	83.55	3194.65	266912.59
5	Fly ash brick(25cmx12cmx8cm) masonry in CM(1:6)for superstructure in foundation and plinth having a crushing strength of not less than 75 kg/sqcm including splays cutting, circular moulding, chamfering and curbing and watering, curing etc including cost, conveyance, royalty and all taxes of materials with cost. of labour, T& P etc. complete required for the work complete in all respect as directed by the engineering -in-charge.				
a.	In foundation & plinth.	Cum	4.00	4562.81	18251.24
b.	In superstructure .	Cum	76.27	4594.75	350441.58
6	Reinforcement cement concrete M-20 grade with 20 mm nomial size down graded nomial size aggregate mechanically mixed and vibrated in foundation and bed protection of speciation for road and Bridge work & Direction of the Eng in charge the work etc complete as direction by the engineering-in-charge.	cum	1.02	4771.27	4866.70
7	Suppling, coiled M.S rod or HYSD steel (Fe-415),cutting, bending,cracking,hooking,olding or jointing (if required) reinforcement including labour charges for cutting, bending, binding and straightening and tying the grills and placing in position including cost of binding wire 18 to 20 gauge as per drawing and technical specifaicon as directed by the engineering-in-charge.	Qtl	8.13	6330.70	51468.59



 30.04.21
 A.E.E (P)


 03-05-21
 Block Development Officer
 PATNA, KEONJHAR

8	Rigid smooth centring and shuttering at all heights for R,C,C work including false work and distementiling them after casting				
		sqmt	8.65	439.89	3805.05
	1) Roof chajja				
		sqmt	1.21	263.33	318.63
	2) Lintel				
11	12 mm thick cement plaster in C.M. (1:6) finishing smooth to outer side brickwork after ranking out the joints including watering and curing with cost, conveyance, royalty of all materials , labour with T & P required for the work including all taxes etc. complete in all respect all floors as directed by engineering-in-charge.	Sqm	323.48	137.22	44386.31
12	16 mm thick cement plaster in C.M. (1:6) finishing smooth to inner side brickwork after ranking out the joints including watering and curing with cost, conveyance, royalty of all materials , labour with T & P required for the work including all taxes etc. complete in all respect all floors as directed by engineering-in-charge.	Sqm	323.48	210.87	68212.23
13	20 mm thick cement plaster in C.M. (1:4) Roof slab Grading plaster after ranking out the joints including watering and curing with cost, conveyance, royalty of all materials , labour with T & P required for the work including all taxes etc. complete in all respect all floors as directed by engineering-in-charge.	sqm	9.50	225.16	2139.02
14	20 mm thick cement plaster in C.M. (1:6) finishing smooth to outer side brickwork after ranking out the joints including watering and curing with cost, conveyance, royalty of all materials , labour with T & P required for the work including all taxes etc. complete in all respect all floors as directed by engineering-in-charge.	Sqm	157.74	214.91	33899.90
15	12 mm thick cement plaster in C.M. (1:4) In cluding cement punning and skirting with all cost conveyance royalty etc complete	Sqm	7.30	148.29	1082.52
16	Providing and applying paint over external plastered surfaces with 2 coats of weather coat of approved quality and shade using the required quantity of paint	Sqm	98.43	75.43	7424.57
17	cement washing one coat	sqm	794.67	14.06	11173.06
18	Priming one coat with appoved primer brick work	sqm	783.52	65.34	51195.20
19	Priming one coat with appoved primer of door and window	sqm	7.26	138.28	1003.91
20	Cement painting two coats over cement plaster	sqm	34.15	33.63	1148.46
21	25mm thick A.s flooring with c.c (1:2:4)using 12 mm H.B.G chips	sqm	4.78	288.56	1379.32
22	Provison of Disply board (4 ft x3ft)	nos	1.00	2000.00	2000.00
23	cost of steel door with frame	nos	1.00	5000.00	5000.00
			Total		1066503.35
		Grand	Total Rs		1066503.00

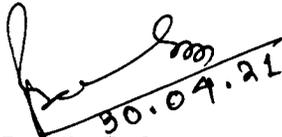
(Rupees ten lakhs sixty six thousand five hundred three) only.

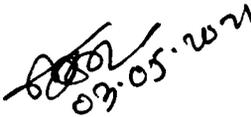

30.04.21
AEE/11

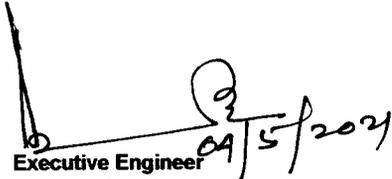

03.05.2021
Block Development Officer
PATNA, KEONJHAR

Tender schedule for the project:-Const. of Boundrey wall and Jana Mandir drinking water facility at ABCDR united Jana Mandir Under CHMENA GP Under OMBADC Patna Block is approved for RS 1066503-(Rupees ten lakhs sixty six thousand five hundred three) with 23 (twenty three) items only.

G.S.T.cost in 12% (CGST6% +SGST6%) will be add at the time of agreement.


Asst. Executive Engineer
Patna
30.04.21.


Block Development Officer
Patna
07.05.2021


Executive Engineer
DRDA, Keonjhar
04/5/2021

My /Our quoted rate is _____ % Excess/Less/Equal
to the corresponding estimate rate
(Write both in words and Figures)

NOTES:-

1. The Contractor should not write anything except quoting of percentage, excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned, the Tender is liable for rejection.
2. Strike out which are not applicable.
3. Percentage quoted by the contractor shall be accurately filled in figure and words, so that there is no discrepancy.
4. If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
5. The percentage quoted in the tender without mentioning excess or less will be treated as excess.
6. The contractor should write percentage excess or less up to two decimal point only. If he/her writes the percentage excess or less more than two decimal points it will be treated as cancelled.

Signature of the Contractor
with address.