


TENDER SCHEDULE


SI No.	ITEM OF WORK	Quantity	Unit	Rate	Amount
DETAILED ESTIMATE FOR THE WORK :-CONSTRUCTION OF TWO NOS OF ADDITIONAL CLASS ROOM AT GODIPOKHORI U.G.U.P.S.		AMOUNT PUT TO TENDER RS.13,84,719.00			
		CLASS OF CONTRACTOR : - D & C			
		COST OF TENDER PAPER :- RS. 6000.00			
		EARNEST MONEY DEPOSIT 1% : RS.13,847.00			
		TIME OF COMPLETION : 4 MONTHS			
1	2	3	4	5	6
1	E/W in excavation of foundation in hardsoil within initial lead & lift including levelling and dressing the bed complete as per the direction of the Eng. In Charge.	61.62	One cum	Rs. 185.90	Rs. 11,455.16
2	Filling F & P with sand well watered and rammed complete as per the direction of the Eng. In Charge.	41.41	One cum	Rs. 456.50	Rs. 18,903.67
3	C.C.(1:3:6) with using 4cm size H.G.H B metal including all cost carriage royalty ect complete.	25.52	One cum	Rs. 4,267.02	Rs. 108,894.35
4	Brick work with Fly ash.Bricks in cement mortar (1:6) in Fdn & Pl of size 10"x5"x3" having crushing strength not less than 75 kg/cm ² with dimensional tolerance ± 8% including carrage and royalty as per the direction of the Eng. In Charge.	25.08	One cum	Rs. 4,160.67	Rs. 104,349.60
5	Reinforcement cement concrete M - 20 grade with 20mm and down grade block hard granite (Crusher broken) stone chips including hoisting and laying including cost, conveyance, royalities, taxes, centering and shuttering etc. complete as per the direction of the Eng. In Charge.				
	a) Column base	11.12	One cum	Rs. 4,867.54	Rs. 54,127.04
	b) Plinth band	4.00	One cum	Rs. 5,223.27	Rs. 20,893.08
	c) Lintel band	2.89	One cum	Rs. 8,591.15	Rs. 24,828.42
	d) Chajja & Roof Slab	15.31	One Sqmt	Rs. 10,577.44	Rs. 161,940.61
	e) Column & Roof beam	7.41	One cum	Rs. 10,422.15	Rs. 77,228.13
6	Providing HYSD bar reinforcement for R.C.C. work including Straightening, cutting, bending, binding, welding, tying the grills, laying and placing in proper position as per approved design and drawing including cost, conveyance of 18 to 20 gauge binding wire cost and conveyance of HYSD bars complete in all respect as per specification for road & Bridge and direction of Eng - in Charge.	40.73	One Qntl	Rs. 6,481.53	Rs. 263,992.72
7	Brick work with Fly Ash Bricks in cement mortar (1:6) in superstructure of size 10"x5"x3" having crushing strength not less than 75 kg/cm ² with dimensional tolerance ± 8% including cost, conveyance, royalities, taxes, centering and shuttering etc. complete as per the direction of the Eng. In Charge.	29.13	One cum	Rs. 4,198.62	Rs. 122,305.80


 30.09.21
 A.E.E(P)


 03.05.2021
 Block Development Officer
 PATNA, KEONJHAR

8	25mm thick grading concrete (1:2:2) on roof slab with 6mm size granite chips on new work including cost, conveyance, royalty etc. complete as per the direction of the Eng. In Charge.	121.35	One Sqmt	Rs. 286.50	Rs. 34,766.78
9	16mm thick cement plaster (1:6) finished smooth to inside rough surface of brick walls after racking out the joint including watering and curing with cost and conveyance, royalties and taxes of all materials and labour charges completed as per the direction of the Eng. In Charge.	168.27	One Sqmt	Rs. 192.34	Rs. 32,365.05
10	12mm thick cement plaster (1:6) finishing smooth to outside smooth surface of brick walls after racking out the joint including watering and curing with cost, conveyance, royalties and taxes of all materials and cost of all labour charges etc, completed as per the direction of the Eng. In Charge.	153.55	One Sqmt	Rs. 134.98	Rs. 20,726.18
11	6mm thick cement plaster in cm (1:4) as ceiling Plaster with all cost conveyance, royalty etc. complete.	108.31	One Sqmt	Rs. 150.40	Rs. 16,289.82
12	Supplying fitting fixing of Vetrified floor tile colour/printed series(homogeneous) in floor of size 600mm x 600 mm laid on 20 mm thick cement mortar (1:1) and filling joint with white cement of approved quality including all cost of materials .T & P etc.complete as per the direction of the Eng. In Charge.	103.37	One Sqmt	Rs. 1,196.63	Rs. 123,695.64
13	Supplying fitting fixing of tile in dado and skirting and riser of step on 12 mm thick cp in cement mortar (1:3) with cement sultry mixwith pigment to match the shade of the tile with rubbing & polishing including all cost of materials .T & P etc.complete	25.43	One Sqmt	Rs. 1,104.86	Rs. 28,096.59
14	Cement washing 1coats etc. complete	430.13	One Sqmt	Rs. 14.10	Rs. 6,064.83
15	Priming one coat over plaster surface with water bound cement primer with cost of all material	430.13	One Sqmt	Rs. 71.17	Rs. 30,612.35
16	Wall painting two coats with distemper paint with cost of materials and labours	276.58	One Sqmt	Rs. 66.84	Rs. 18,486.61
17	Wall painting two coats with weather coat with cost of materials and labours	153.55	One Sqmt	Rs. 80.23	Rs. 12,319.32
18	Painting two coats over acoat of primer including cost of primer over Door nad Window	47.94	One Sqmt	Rs. 131.70	Rs. 6,313.70
19	Cost of M.S.Door, Windows	776.00	kg	Rs. 64.00	Rs. 49,664.00
20	Supplying and fixing of Stain less steel hand railing useing 50mm dia of 2mm thick circular pipe with foot rest in ramp as per the design specification including cost of all material as per the direction of Engg. In charge.	4.00	nos	Rs. 3,500.00	Rs. 14,000.00
21	provision of black board size (8'.0" x 4'.0")	2.00	nos	Rs. 2,000.00	Rs. 4,000.00
22	Provision for Display Board (4'0" x 5'0")	1.00	no	Rs. 5,000.00	Rs. 5,000.00
23	provision of recharge pit of roof top water harvesting and sluge pit (size 5' x 5' x 4') with cover slab connected with 4" dia PVC pipe with fittings as the direction of the Engineer incharge.	1.00	no	Rs. 11,000.00	Rs. 11,000.00


 30.09.21
 AEE (V)


 03.05.2021
 Block Development Officer
 PATNA, KEONJHAR


24	Supplying and fixing of ventilators (1'6" x 1'0")	8.00	nos	Rs. 300.00	Rs. 2,400.00
		Total		=	Rs. 1,384,719.45
		Grand Total		=	Rs. 13,84,719.00

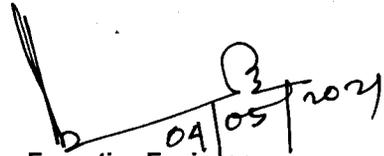
(RUPEES THIRTEEN LAKHS EIGHTYFOUR THOUSAND SEVEN HUNDRED NINETEEN) ONLY

Tender schedule for the project:-Construction of Two nos of Additional Class Room at Godipokhori U.G.U.P.S. is approved for Rs.1384719/- (Rupees Thirteen Lakhs Eightyfour Thousand Seven Hundred Nineteen) Only with 24 (Twentyfour) item only.

Add for G.S.T cost 12% (CGST6%+SGST 6%) & 1 % Labour Cess will be added at the time of agreement .


30.04.21.
Asst. Executive Engineer
Patna Block


03.05.2021
Block Development Officer
Patna Block


04/05/2021
Executive Engineer
DRDA,Keonjhar

My / Our quoted rate is % Excess / Less / Equal to the corresponding estimate rate

(write both in words and figures)

NOTES:-

1. The Contractor should not write anything except quoting of percentage,excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned,the Tender is liable for rejection.
2. Strike out which are not applicable.
3. Percentage quoted by the contractor shall be accurately filled in figure and words,so that there is no discrepancy.
4. If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
5. The percentage quoted in the tender without mentioning excess or less will be treated as excess.
6. The contractor should write percentage excess or less up to two decimal point only.If he/her writes the percentage excess or less more than two decimal points it will be treated as cancelled.

**Signature of the Contractor
with address.**