

TENDER SCHEDULE

Name of the Work:-Const.of Compound Wall of Bansidhar Vidyapitha, Madanpur

Amount Put to Tender	:	1273999.00			
Class of Contractor	:	"C"&"D"			
Cost of Tender Paper	:	6000.00			
Date required for completion	:	4(six) calender Month			
SL.N O	DESCRIPTION OF ITEMS	UNIT	TOTAL QNTY	RATE	AMOUNT
1	2	3	4	5	6
1	Earthwork exacavation in hard soil within initial lead and lift as per direction of the E.I.C	Cum	171.48	195.40	33507.19
2	Filling in Foundation and plinth with sand well watered and rammed etc.all complete	Cum	32.16	373.10	11998.90
3	Cement concrete (1:3:6) using 40cm size metal etc. complete	Cum	32.16	3578.00	115068.48
4	Fly Ash Brick Masonary in CM (1:6) using bricks strength 75 kg/sqcm in Foundation	Cum	58.70	4269.60	250625.52
5	Fly Ash Brick Masonary in CM (1:6) using bricks strength 75 kg/sqcm in Superstructure	Cum	83.70	4303.00	360161.10
6	R.C.C work of M-20 grade with 20mm and down grade C.B chips including hoisting & laying Centering shuttering cost, Carriage and Royalty, tax of material				
a	Column Base	Cum	17.28	4798.01	82914.38
b	Plinth Beam	Cum	13.50	5175.79	69873.22
c	Column	Cum	7.43	10602.10	78773.60
7	Labour charges for cutting,bending of M.S.Rod including cost of Materials taking 50%	Qntl	19.11	1394.20	26636.89
8	12mm thick cement plaster mortar (1:6) in external surface of wall	Sqm	405.00	140.50	56902.50
9	16mm thick cement plaster mortar (1:6) in internal surface of wall	Sqm	405.00	201.10	81445.50
10	Supplying and applying of primer over putty surface area	Sqm	801.00	40.18	32543.27
11	Supplying and applying of of approved quality 2 coat whether paint over outer side of finishing area	Sqm	810.00	90.80	73548.00
			Total		1273998.55
				or	1273999.00

(Rupees Twelve lakhs Seventy Three thousand Nine hundred Ninety Nine) only

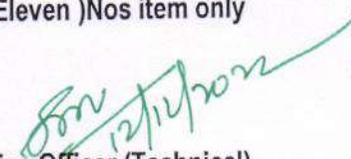
Total 11 (Eleven nos. item only)

G.S.T cost in 18% (CGST9%+SGST9%) will be add at the time of agreement.

Approved for 11 (Eleven)Nos item only


Assistant Executive Engineer
Ghasipura Block


Block Development Officer
Ghasipura Block


Addl. Executive Officer (Technical)
Zilla Parishad, Keonjhar

TO BE FILLED BY THE TENDERER

My/Our quoted rate is.....%

(Excess/Less/Equal to the corresponding estimate rate)
(Write Both in words and Figures)

NOTES:-

- 1.The Contractor should not write anything except quoting of percentage, excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned ,the Tender is laible for rejection.
2. Strike out which are not applicable.
- 3.Percentage quoted by the contractor shall be accurately filled in figure and words, so that there is no discrepancy.
- 4.If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
- 5.The percentage quoted in the tender will out mentioning excess or less will be treated as excess.
- 6.The contractor should write percentage excess or less up two decimal point only. If he/She writes the percentage excess or less more than two decimal points. It will b treated as cancelled

Signature of Tenderer

**Block Development Officer
Ghasipura Block**

TENDER SCHEDULE

Name of the Work:- Construction of Science Lab, E-Library and one Additional Classroom at Bagabati Bidyapitha, Bhandaridiha

Amount Put to Tender	:	4235758.00			
Class of Contractor	:	"B"			
Cost of Tender Paper	:	6000.00			
Date required for completion	:	6 (six) calendar Month			
SL.NO	DESCRIPTION OF ITEMS	UNIT	TOTAL QNTY	RATE	AMOUNT
1	2	3	4	5	6
1	Earthwork excavation in hard soil within initial lead and lift as per direction of the E.I.C	Cum	103.42	195.40	20208.44
2	Filling in Foundation and plinth with sand well watered and rammed etc.all complete	Cum	188.64	328.60	61987.16
3	Cement concrete (1:3:6) using 40cm size metal etc. complete	Cum	32.24	3471.30	111915.57
4	Fly Ash Brick Masonary in CM (1:6) using bricks strength 75 kg/sqcm in Foundation	Cum	45.16	4187.20	189087.49
5	Fly Ash Brick Masonary in CM (1:6) using bricks strength 75 kg/sqcm in Superstructure				
a	Ground floor	Cum	53.17	4220.50	224417.07
b	1st floor	Cum	40.97	4463.10	182888.20
c	2nd floor	Cum	9.85	4737.10	46678.28
6	R.C.C work of M-20 grade with 20mm and down grade C.B chips including hoisting & laying Centering shuttering cost, Carriage and Royalty, tax of material				
	Ground floor				
a	Column Base	Cum	17.63	4698.01	82840.06
b	Plinth Beam	Cum	9.64	5075.79	48947.95
c	Column	Cum	5.51	10502.10	57960.23
d	Roof Beam	Cum	7.66	10502.10	80467.37
e	Lintal Band	Cum	4.72	8462.92	39981.31
f	Chajja	Sqm	34.16	749.40	25604.96
g	Roof Slab	Cum	27.00	8668.50	234115.02
h	Staircase	Cum	2.92	10142.30	29706.03
	1st floor				
a	Column	Cum	300.00	11770.70	35404.20
b	Roof Beam	Cum	3.88	11770.70	45615.93
c	Lintal Band	Cum	2.73	9323.60	25530.76
d	Chajja	Sqm	15.82	845.20	13377.09
e	Roof Slab	Cum	16.24	9570.40	155693.45
f	Staircase	Cum	3.31	11338.90	37545.35
	2nd floor				
a	Column	Cum	1.11	13289.30	14776.58

7	Supplying , cutting, Bending and binding and placing in position HSYD bars per drawing and instruction of engineer in charge	Qntl	115.53	8720.20	1007431.11
8	Providing and fixing M.S.grills of required pattern in frames of windows etc.with M.S.flats, square or round bars etc including priming coat with approved steel primer all	Kg	1716.75	113.21	194359.43
9	6mm thick CP in CM (1:6) to all RCC surface including closed deep chipping				
a	Ground floor	Sqm	209.91	125.70	26386.07
b	1st floor	Sqm	92.98	128.90	11985.34
10	12mm thick cement plaster mortar (1:6) in external surface of wall				
a	Ground floor	Sqm	196.15	139.80	27422.75
b	1st floor	Sqm	153.22	144.70	22171.77
11	16mm thick cement plaster mortar (1:6) in internal surface of wall				
a	Ground floor	Sqm	311.96	200.30	62487.45
b	1st floor	Sqm	153.05	202.70	31023.46
12	supplying fitting and fixing verified tile in floor on 25mm thick bed of cement mortar (1:3)				
a	Ground floor	Sqm	210.50	1154.60	243046.10
b	1st floor	Sqm	84.43	1173.50	99080.04
13	supplying fitting and fixing verified tile in rises of step, dados and skirting on 12mm thick cement mortar (1:3)				
a	Ground floor	Sqm	21.31	1260.90	26874.39
b	1st floor	Sqm	14.71	1288.20	18955.45
14	Supplying fitting and fixing chequered tile in floor on 25mm thick bed of cement mortar (1:3)	Sqm	10.78	817.30	8811.04
15	Supplying fitting and fixing grinite tile in floor on 25mm thick bed of cement mortar (1:1)	Sqm	15.61	2287.90	35721.85
16	Two coat of enamel painting over one coat of primer on iron works door and window	Sqm			
a	Ground floor	Sqm	69.42	197.60	13718.14
b	1st floor	Sqm	73.22	240.60	17617.35
17	Finishing wall surface with acrylic putty new plaster surface				
a	Ground floor	Sqm	521.88	118.20	61686.50
b	1st floor	Sqm	246.03	149.00	36658.89
18	Supplying and applying of primer over putty surface area				
a	Ground floor	Sqm	718.03	59.00	42364.33
b	1st floor	Sqm	399.25	79.90	31900.77
19	Supplying and applying of plasting Immulsion paint over inner side finishing area				

a	Ground floor	Sqm	521.88	78.80	41124.33
b	1st floor	Sqm	246.03	93.70	23053.27
20	Supplying and applying of approved quality 2 coat whether paint over outer side of finishing area				
a	Ground floor	Sqm	196.15	90.80	17811.06
b	1st floor	Sqm	153.22	113.60	17406.45
21	2.5cm grading concrete (1:2:2) on roof slab with 6mm chips				
a	Ground floor	Sqm	197.15	298.10	58772.10
b	1st floor	Sqm	89.33	325.60	29087.63
22	Supplying, fabricating and fixing of hand rail made of SS square and round pipe with 304 grade. Top pipe 50mm dia round pipe of 2mm thick, 1 Balustrade per meter length and 3 horizontal line of 32mmX32mmX2mm square pipe				
		Rmt	27.69	3354.10	92875.02
23	Black board at both side short wall (12'X4')size				
		nos	6.00	1500.00	9000.00
24	Aluminium Sliding Shutter				
		Sqm	22.68	5647.10	128076.22
25	Supplying fitting GCI sheet in head room				
		Sqm	32.57	502.53	16370.20
26	Square hollow section				
		kg	221.64	80.00	17731.00
			Total		4235758.01
			or		4235758.00

(Rupees Fourty Two lakhs Thirty Five thousand Seven hundred Fifty Eight) only

Total 26 (Twenty six nos. item only)

G.S.T cost in 18% (CGST9%+SGST9%) will be add at the time of agreement.

Approved for 26 (Twenty six)Nos item only


 Assistant Executive Engineer Block Development Officer Addl. Executive Officer (Technical)
 Ghasipura Block Ghasipura Block Zilla Parishad, Keonjhar

TO BE FILLED BY THE TENDERER

My/Our quoted rate is.....%

(Excess/Less/Equal to the corresponding estimate rate)
(Write Both in words and Figures)

NOTES:-

- 1.The Contractor should not write anything except quoting of percentage, excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned ,the Tender is laible for rejection.
2. Strike out which are not applicable.
- 3.Percentage quoted by the contractor shall be accurately filled in figure and words, so that there is no discrepancy.
- 4.If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
- 5.The percentage quoted in the tender will out mentioning excess or less will be treated as excess.
- 6.The contractor should write percentage excess or less up two decimal point only. If he/She writes the percentage excess or less more than two decimal points. It will b treated as cancelled

Signature of Tenderer

**Block Development Officer
Ghasipura Block**

TENDER SCHEDULE

Name of the Work:- Construction of Science Lab, E-Library and Two Additional Classroom at R.S.Bidyapitha

Amount Put to Tender	:	4380994.00		
Class of Contractor	:	"B"		
Cost of Tender Paper	:	6000.00		
Date required for completion	:	6 (six) calendar Month		

SL.NO	DESCRIPTION OF ITEMS	UNIT	TOTAL QNTY	RATE	AMOUNT
		2	3	4	5
1	2	3	4	5	6
1	Earthwork excavation in hard soil within initial lead and lift as per direction of the E.I.C	Cum	160.07	195.40	31277.02
2	Filling in Foundation and plinth with sand well watered and rammed etc.all complete	Cum	292.22	373.10	109024.75
3	Cement concrete (1:3:6) using 40cm size metal etc. complete	Cum	50.09	3578.00	179215.05
4	Fly Ash Brick Masonary in CM (1:6) using bricks strength 75 kg/sqcm in Foundation	Cum	68.61	4269.60	292934.85
5	Fly Ash Brick Masonary in CM (1:6) using bricks strength 75 kg/sqcm in Superstructure	Cum	85.03	4303.00	365886.95
6	R.C.C work of M-20 grade with 20mm and down grade C.B chips including hoisting & laying Centering shuttering cost, Carriage and Royalty, tax of material				
a	Column Base	Cum	25.66	4798.01	123147.06
b	Plinth Beam	Cum	15.22	5175.79	78809.92
c	Column	Cum	8.61	10602.10	91475.97
d	Roof Beam	Cum	12.01	10602.10	127328.41
e	Lintal Band	Cum	7.19	8562.90	61630.86
f	Chajja	Sqm	51.39	755.90	38857.50
g	Roof Slab	Cum	44.77	8768.50	392621.09
7	Supplying , cutting, Bending and binding and placing in position HSYD bars per drawing and instruction of engineer in charge	Qntl	111.78	8720.20	974717.42
8	Providing and fixing M.S.grills of required pattern in frames of windows etc.with M.S.flats, square or round bars etc including priming coat with approved steel primer all	Kg	1856.00	113.21	210124.42
9	6mm thick CP in CM (1:6) to all RCC surface including closed deep chipping	Sqm	570.25	126.00	71850.54
10	12mm thick cement plaster mortar (1:6) in external surface of wall	Sqm	340.28	140.50	47810.73
11	16mm thick cement plaster mortar (1:6) in internal surface of wall	Sqm	433.26	201.10	87129.64

12	supplying fitting and fixing verified tile in floor on 25mm thick bed of cement mortar (1:3)	Sqm	301.18	1155.20	347932.72
13	supplying fitting and fixing verified tile in rises of step, dados and skirting on 12mm thick cement mortar (1:3)	Sqm	23.06	1261.60	29107.66
14	Supplying fitting and fixing chequered tile in floor on 25mm thick bed of cement mortar (1:3)	Sqm	21.56	798.90	17429.10
15	Supplying fitting and fixing grinite tile in floor on 25mm thick bed of cement mortar (1:1)	Sqm	15.61	2288.50	35731.22
16	Two coat of enamel painting over one coat of primer on iron works door and window	Sqm	129.64	197.60	25616.28
17	Finishing wall surface with acrylic putty new plaster surface	Sqm	1003.55	118.20	118613.26
18	Supplying and applying of primer over putty surface area	Sqm	1343.84	59.00	79287.09
19	Supplying and applying of plasting Immulsion paint over inner side finishing area	Sqm	1003.56	78.80	79080.44
20	Supplying and applying of of approved quality 2 coat whether paint over outer side of finishing area	Sqm	340.28	90.80	30891.82
21	2.5cm grading concrete (1:2:2) on roof slab with 6mm chips	Sqm	336.62	300.30	101094.33
22	Supplying, fabricating and fixing of hand rail made of SS square and round pipe with 304 grade. Top pipe 50mm dia round pipe of 2mm thick, 1 Balustrade per meter length and 3 horizontal line of 32mmX32mmX2mm square pipe	Rmt	17.06	3354.10	57220.95
23	Black board at both side short wall (12'X4')size	nos	6.00	2000.00	12000.00
24	Aluminium Sliding Shutter	Sqm	29.16	5490.00	163147.28
			Total		4380994.33
				or	4380994.00

(Rupees Fourty Three lakhs Eighty thousand nine Hundred Ninety Four) only


Total 24 (Twenty Four nos. item only)

G.S.T cost in 18% (CGST9%+SGST9%) will be add at the time of agreement.

Approved for 24 (Twenty four)Nos item only


Assistant Executive Engineer
Ghasipura Block


Block Development Officer
Ghasipura Block


Addl. Executive Officer (Technical)
Zilla Parishad, Keonjhar

TO BE FILLED BY THE TENDERER

* My/Our quoted rate is.....%

(Excess/Less/Equal to the corresponding estimate rate)
(Write Both in words and Figures)

NOTES:-

- 1.The Contractor should not write anything except quoting of percentage, excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned ,the Tender is laible for rejection.
2. Strike out which are not applicable.
- 3.Percentage quoted by the contractor shall be accurately filled in figure and words, so that there is no discrepancy.
- 4.If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
- 5.The percentage quoted in the tender will out mentioning excess or less will be treated as excess.
- 6.The contractor should write percentage excess or less up two decimal point only. If he/She writes the percentage excess or less more than two decimal points. It will b treated as cancelled

Signature of Tenderer

**Block Development Officer
Ghasipura Block**

Name of the Work:- Construction of Four Additional Classroom and Science Lab at Khandurimata High School, Badapadana

Amount Put to Tender	:	5551836.00			
Class of Contractor	:	"B"			
Cost of Tender Paper	:	10000.00			
Date required for completion	:	6 (six) calender Month			
SL.NO	DESCRIPTION OF ITEMS	UNIT	TOTAL QNTY	RATE	AMOUNT
1	2	3	4	5	6
1	Earthwork excavatation in hard soil within initial lead and lift as per direction of the E.I.C	Cum	190.69	195.40	37260.68
2	Filling in Foundation and plinth with sand well watered and rammed etc.all complete	Cum	410.42	373.10	153126.25
3	Cement concrete (1:3:6) using 40cm size metal etc. complete	Cum	57.53	3578.00	205821.26
4	Fly Ash Brick Masonary in CM (1:6) using bricks strength 75 kg/sqcm in Foundation	Cum	97.51	4269.60	416306.90
5	Fly Ash Brick Masonary in CM (1:6) using bricks strength 75 kg/sqcm in Superstructure	Cum	102.55	4303.00	441317.73
6	R.C.C work of M-20 grade with 20mm and down grade C.B chips including hoisting & laying Centering shuttering cost, Carriage and Royalty, tax of material				
b	Column Base	Cum	32.41	4798.01	155548.39
c	Plinth Beam	Cum	18.79	5175.79	97311.05
d	Column	Cum	10.17	10602.10	107957.87
e	Roof Beam	Cum	14.44	10602.10	153087.91
f	Lintal Band	Cum	8.66	8562.90	74213.62
g	Chajja	Sqm	61.13	755.90	46220.88
h	Roof Slab	Cum	52.32	8768.50	458791.37
7	Supplying , cutting, Bending and binding and placing in position HSYD bars per drawing and instruction of engineer in charge	Qntl	149.55	8720.20	1304106.00
8	Providing and fixing M.S.grills of required pattern in frames of windows etc.with M.S.flats, square or round bars etc including priming coat with approved steel primer all	Kg	2312.00	113.21	261749.82
9	6mm thick CP in CM (1:6) to all RCC surface including closed deep chipping	Sqm	869.25	126.00	109525.50
10	12mm thick cement plaster mortar (1:6) in external surface of wall	Sqm	399.58	140.50	56142.67
11	16mm thick cement plaster mortar (1:6) in internal surface of wall	Sqm	530.32	201.10	106649.34
12	supplying fitting and fixing vertified tile in floor on 25mm thick bed of cement mortar (1:3)	Sqm	373.01	1155.20	430913.87

13	supplying fitting and fixing verified tile in rises of step, dados and skirting on 12mm thick cement mortar (1:3)	Sqm	28.59	1261.60	36054.66
14	Supplying fitting and fixing chequered tile in floor on 25mm thick bed of cement mortar (1:3)	Sqm	25.26	798.90	20195.24
15	Two coat of enamel painting over one coat of primer on iron works door and window	Sqm	148.04	197.60	29254.34
16	Finishing wall surface with acrylic putty new plaster surface	Sqm	1399.56	118.20	165429.91
17	Supplying and applying of primer over putty surface area	Sqm	1799.16	59.00	106150.92
18	Supplying and applying of plasting Immulsion paint over inner side finishing area	Sqm	1399.58	78.80	110286.61
19	Supplying and applying of of approved quality 2 coat whether paint over outer side of finishing area	Sqm	399.58	90.80	36282.95
20	Supplying fitting and fixing grinite tile in floor on 25mm thick bed of cement mortar (1:1)	Sqm	15.61	2288.50	35731.22
21	2.5cm grading concrete (1:2:2) on roof slab with 6mm chips	Sqm	409.31	300.30	122915.79
22	Supplying, fabricating and fixing of hand rail made of SS square and round pipe with 304 grade. Top pipe 50mm dia round pipe of 2mm thick, 1 Balustrade per meter length and 3 horizontal line of 32mmX32mmX2mm square pipe	Rmt	17.06	3354.10	57220.94
23	Black board at both side short wall (12'X4')size	nos	10.00	1500.00	15000.00
24	Aluminium Sliding Shutter	Sqm	35.64	5647.10	201262.64
			Total		5551836.33
				or	5551836.00

(Rupees Fifty Five lakhs Fifty One thousand Eight hundred Thirty Six) only

Total 24 (Twenty Four nos. item only)

G.S.T cost in 18% (CGST9%+SGST9%) will be add at the time of agreement.

Approved for 24 (Twenty four)Nos item only


Assistant Executive Engineer
Ghasipura Block


Block Development Officer
Ghasipura Block


Addl. Executive Officer (Technical)
Zilla Parishad, Keonjhar

TO BE FILLED BY THE TENDERER

My/Our quoted rate is.....%

(Excess/Less/Equal to the corresponding estimate rate)
(Write Both in words and Figures)

NOTES:-

- 1.The Contractor should not write anything except quoting of percentage, excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned ,the Tender is laible for rejection.
2. Strike out which are not applicable.
- 3.Percentage quoted by the contractor shall be accurately filled in figure and words, so that there is no discrepancy.
- 4.If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
- 5.The percentage quoted in the tender will out mentioning excess or less will be treated as excess.
- 6.The contractor should write percentage excess or less up two decimal point only. If he/She writes the percentage excess or less more than two decimal points. It will b treated as cancelled

Signature of Tenderer

**Block Development Officer
Ghasipura Block**

TENDER SCHEDULE

Name of the Work:- Construction of Library and Science Lab at Madhuban Nodal High School, Kansa Kendua

Amount Put to Tender	:	2598499.00		
Class of Contractor	:	"B" & "C"		
Cost of Tender Paper	:	6000.00		
Date required for completion	:	6 (six) calendar Month		

SL.NO	DESCRIPTION OF ITEMS	UNIT	TOTAL QNTY	RATE	AMOUNT
	2	3	4	5	6
1	Earthwork excavation in hard soil within initial lead and lift as per direction of the E.I.C	Cum	100.33	195.40	19604.16
2	Filling in Foundation and plinth with sand well watered and rammed etc.all complete	Cum	130.99	462.00	60517.26
3	Cement concrete (1:3:6) using 40cm size metal etc. complete	Cum	26.74	3620.60	96798.36
4	Fly Ash Brick Masonary in CM (1:6) using bricks strength 75 kg/sqcm in Foundation	Cum	24.36	4294.50	104625.85
5	Fly Ash Brick Masonary in CM (1:6) using bricks strength 75 kg/sqcm in Superstructure	Cum	53.04	4327.80	229544.97
6	R.C.C work of M-20 grade with 20mm and down grade C.B chips including hoisting & laying Centering shuttering cost, Carriage and Royalty, tax of material				
a	Column Base	Cum	12.50	4969.41	62126.72
b	Plinth Beam	Cum	11.47	5347.19	61343.82
c	Column	Cum	5.66	10773.50	60935.54
d	Roof Beam	Cum	7.14	10773.50	76969.98
e	Lintal Band	Cum	4.26	8734.30	37191.37
f	Chajja	Sqm	31.07	767.10	23843.48
g	Roof Slab	Cum	25.66	8939.90	229398.37
7	Supplying , cutting, Bending and binding and placing in position HSYD bars per drawing and instruction of engineer in charge	Qntl	65.84	8720.20	574156.46
8	Providing and fixing M.S.grills of required pattern in frames of windows etc.with M.S.flats, square or round bars etc including priming coat with approved steel primer all	Kg	1000.00	113.21	113213.59
9	6mm thick CP in CM (1:6) to all RCC surface including closed deep chipping	Sqm	433.65	126.70	54931.29
10	12mm thick cement plaster mortar (1:6) in external surface of wall	Sqm	238.79	141.80	34501.49
11	16mm thick cement plaster mortar (1:6) in internal surface of wall	Sqm	318.24	202.70	64507.23

12	supplying fitting and fixing verified tile in floor on 25mm thick bed of cement mortar (1:3)	Sqm	164.32	1156.40	190021.40
13	supplying fitting and fixing verified tile in rises of step, dados and skirting on 12mm thick cement mortar (1:3)	Sqm	14.68	1262.90	18537.09
14	Supplying fitting and fixing chequered tile in floor on 25mm thick bed of cement mortar (1:3)	Sqm	15.98	800.10	12787.22
15	Supplying fitting and fixing grinite tile in floor on 25mm thick bed of cement mortar (1:1)	Sqm	15.61	2289.60	35734.25
16	Two coat of enamel painting over one coat of primer on iron works door and window	Sqm	69.41	197.60	13713.14
17	Finishing wall surface with acrylic putty new plaster surface	Sqm	751.67	118.20	88835.81
18	Supplying and applying of primer over putty surface area	Sqm	860.75	59.00	50784.45
19	Supplying and applying of plasting Immulsion paint over inner side finishing area	Sqm	751.67	78.80	59231.82
20	Supplying and applying of of approved quality 2 coat whether paint over outer side of finishing area	Sqm	238.79	90.80	21676.46
21	2.5cm grading concrete (1:2:2) on roof slab with 6mm chips	Sqm	191.15	301.80	57692.11
22	Supplying, fabricating and fixing of hand rail made of SS square and round pipe with 304 grade. Top pipe 50mm dia round pipe of 2mm thick, 1 Balustrade per meter length and 3 horizontal line of 32mmX32mmX2mm square pipe	Rmt	17.06	3354.10	57220.34
23	Black board at both side short wall (12'X4')size	nos			3000.00
24	Aluminium Sliding Shutter	Sqm	16.20	4985.80	85055.19
			Total		2598499.22
				or	2598499.00


(Rupees Twenty five lakhs ninty eight thousand four Hundred Ninety nine) only


Total 24 (Twenty Four nos. item only)

G.S.T cost in 18% (CGST9%+SGST9%) will be add at the time of agreement.

Approved for 24 (Twenty four)Nos item only


Assistant Executive Engineer
Ghasipura Block


Block Development Officer
Ghasipura Block


Addl. Executive Officer (Technical)
Zilla Parishad, Keonjhar

TO BE FILLED BY THE TENDERER

My/Our quoted rate is.....%

(Excess/Less/Equal to the corresponding estimate rate)
(Write Both in words and Figures)

NOTES:-

- 1.The Contractor should not write anything except quoting of percentage, excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned ,the Tender is laible for rejection.
2. Strike out which are not applicable.
- 3.Percentage quoted by the contractor shall be accurately filled in figure and words, so that there is no discrepancy.
- 4.If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
- 5.The percentage quoted in the tender will out mentioning excess or less will be treated as excess.
- 6.The contractor should write percentage excess or less up two decimal point only. If he/She writes the percentage excess or less more than two decimal points. It will b treated as cancelled

Signature of Tenderer

Block Development Officer
Ghasipura Block

TENDER SCHEDULE

Name of the Work:- Construction of Science Lab, E-Library and Two Additional Classroom at Panchayat High School, Balarampur

Amount Put to Tender	:		3169416.00			
Class of Contractor	:		"B"&"C"			
Cost of Tender Paper	:		6000.00			
Date required for completion	:		6 (six) calendar Month			
SL.NO		DESCRIPTION OF ITEMS	UNIT	TOTAL QNTY	RATE	AMOUNT
1	2	3	4	5	6	
1		Earthwork excavation in hard soil within initial lead and lift as per direction of the E.I.C	Cum	112.97	195.38	22073.19
2		Filling in Foundation and plinth with sand well watered and rammed etc.all complete	Cum	163.51	328.64	53735.97
3		Cement concrete (1:3:6) using 40cm size metal etc. complete	Cum	33.31	3419.18	113881.42
4		Fly Ash Brick Masonary in CM (1:6) using bricks strength 75 kg/sqcm in Foundation	Cum	40.20	4149.35	166812.58
5		Fly Ash Brick Masonary in CM (1:6) using bricks strength 75 kg/sqcm in Superstructure	Cum	64.29	4182.68	268903.99
6		R.C.C work of M-20 grade with 20mm and down grade C.B chips including hoisting & laying Centering shuttering cost, Carriage and Royalty, tax of material				
a		Column Base	Cum	14.29	4643.61	66345.97
b		Plinth Beam	Cum	11.19	5021.39	56177.10
c		Column	Cum	6.22	10447.70	64967.59
d		Roof Beam	Cum	10.50	10447.70	109656.26
e		Lintal Band	Cum	5.06	8408.50	42543.32
f		Chajja	Sqm	5.87	745.88	21059.24
g		Roof Slab	Cum	35.47	8614.12	305506.49
7		Supplying , cutting, Bending and binding and placing in position HSYD bars per drawing and instruction of engineer in charge	Qntl	79.73	8715.81	694899.10
8		Providing and fixing M.S.grills of required pattern in frames of windows etc.with M.S.flats, square or round bars etc including priming coat with approved steel primer all	Kg	1522.50	113.21	172367.69
9		6mm thick CP in CM (1:6) to all RCC surface including closed deep chipping	Sqm	500.55	124.51	62325.09
10		12mm thick cement plaster mortar (1:6) in external surface of wall	Sqm	215.09	144.59	31100.67
11		16mm thick cement plaster mortar (1:6) in internal surface of wall	Sqm	405.02	200.01	81051.34

12	supplying fitting and fixing verified tile in floor on 25mm thick bed of cement mortar (1:3)	Sqm	230.68	1153.50	266084.49
13	supplying fitting and fixing verified tile in rises of step, dados and skirting on 12mm thick cement mortar (1:3)	Sqm	19.98	1260.40	25188.09
14	Supplying fitting and fixing chequered tile in floor on 25mm thick bed of cement mortar (1:3)	Sqm	7.99	797.20	6371.67
15	Supplying fitting and fixing grinite tile in floor on 25mm thick bed of cement mortar (1:1)	Sqm	15.61	2286.80	35704.68
16	Two coat of enamel painting over one coat of primer on iron works door and window	Sqm	95.14	197.55	18795.8
17	Finishing wall surface with acrylic putty new plaster surface	Sqm	905.56	118.17	107013.33
18	Supplying and applying of primer over putty surface area	Sqm	905.56	60.40	54695.97
19	Cement wash two coat over new plaster wark outer side surface	Sqm	215.09	21.85	4699.80
20	Supplying and applying of plasting Immulsion paint over inner side finishing area	Sqm	905.56	78.80	71358.32
21	Supplying and applying of of approved quality 2 coat whether paint over outer side of finishing area	Sqm	215.09	92.26	19844.99
22	2.5cm grading concrete (1:2:2) on roof slab with 6mm chips	Sqm	258.56	292.25	75563.81
23	Supplying, fabricating and fixing of hand rail made of SS square and round pipe with 304 grade. Top pipe 50mm dia round pipe of 2mm thick, 1 Balustrade per meter length and 3 horizontal line of 32mmX32mmX2mm square pipe	Rmt	8.53	3354.06	28610.17
24	Black board at both side short wall (12'X4')size	nos	6.00	1500.00	9000.00
25	Aluminium Sliding Shutter	Sqm	22.68	4985.80	113077.94
			Total		3169416.07
				or	3169416.00

(Rupees Thirty one lakhs sixty nine thousand four Hundred sixteen) only


Total 25 (Twenty FIVE nos. item only)

G.S.T cost in 18% (CGST9%+SGST9%) will be add at the time of agreement.

Approved for 25 (Twenty four)Nos item only


Assistant Executive Engineer
Ghasipura Block


Block Development Officer
Ghasipura Block


Addl. Executive Officer (Technical)
Zilla Parishad, Keonjhar

TO BE FILLED BY THE TENDERER

My/Our quoted rate is.....%

(Excess/Less/Equal to the corresponding estimate rate)
(Write Both in words and Figures)

NOTES:-

- 1.The Contractor should not write anything except quoting of percentage, excess/less/equal to the amount to Tender and in any case any thing else regarding tender rate is mentioned ,the Tender is laible for rejection.
2. Strike out which are not applicable.
- 3.Percentage quoted by the contractor shall be accurately filled in figure and words, so that there is no discrepancy.
- 4.If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall be taken as correct.
- 5.The percentage quoted in the tender will out mentioning excess or less will be treated as excess.
- 6.The contractor should write percentage excess or less up two decimal point only. If he/She writes the percentage excess or less more than two decimal points. It will b treated as cancelled

Signature of Tenderer

**Block Development Officer
Ghasipura Block**