


TENDER SCHEDULE

	Name of the work : - Construction of boundary wall of Bahaliadal Nodal U.P. School, Mirigikhoji		Amount put to Tender : - Rs 11,60,714.00		
			Class of Contractor - D & C		
			Cost of Tender paper- Rs 6000.00		
			Earnest money deposited@ 1%Rs11607.00		
			Time of Completion - <u>4</u> Months		
Sl. No.	Description of work	Quantity	Unit	As per estimate	
1	2	3	4	5	6
1	Earth work excavation of foundation in hard soil or gravel soil within 50 mt. initial lead and 1.5mt. Initial lift including stacking the excavated materials away from the working area including rough dressing and breaking clods to maximum 5cm to 7cm and laying in layers not exceeding 0.3mt. in depth including cost of all labour, T & P, dewatering, shoring and shuttering required for the work etc. complete as per the specification & direction of Engineer-in-charge.	112.76	Cum.	188.29	21,231.58
2	Providing supplying, filling foundation and plinth with sand well watered and rammed including all cost, conveyance, royalty and taxes of materials and labour with T & P, dewatering required for the work etc. complete as per the direction of the Engineer-in-charge.	22.55	Cum.	415.81	9,376.52
3	Providing and laying Plain cement concrete (1:4:8) in foundation using 40mm size black hard broken granite metal of approved quality from approved quarry free from weathered and skin free including mixing, lowering, laying and compacting to proper thickness with watering and curing for the required period including cost of all materials, labours, conveyance, loading, unloading, taxes, cess, royalties, scaffolding, dewatering if required, sundries tolls and plants etc. complete as per direction by the Engineer in charge.	22.55	Cum.	4,085.44	92,127.00
4	Flyash brick work masonry in cm(1:6) using Flyash brick of size(25x12x8)cm having minimum compressive strength in work test not less than 75kg/cm with dimension tolerance +8% including chamfering, moulding, curbing, watering and curing including all cost, conveyance, royalties and all taxes of all materials and labour with T & P required for the work etc. complete as per direction of the Engineer-in-charge				
	A) In Foundation and plinth	70.59	Cum.	4,382.45	3,09,357.00
	B) In Super structure	83.98	Cum.	4,415.45	3,70,809.00


 30.04.21
 AEE U


 07.05.2021
 Block Development Officer
 PATNA, KEONJHAR

5	R.C.C. work of M20 grade with 20mm nominal and down graded black hard granite crusher broken stone chips quarried and free from weathr skin and foriegn materials of approved quality including mixing and laying the concrete in position to proper profile and level compacting with all leads and lifts and delifts and finishing the exposed surface smooth curing for required time with cost conveyance, royalty and other taxes of materials including hire and running charges of machineries with centering and etc. complete as direction of Engineer-in-charges.				
	Plinth Beam	7.49	Cum.	4,873.77	36,505.00
6	Supplying of HYSD bars (Fe-415) of only manufacturing companies such as (SAIL/TATA/JINDALSTEEL) of approved quality including straighting, cutting to size , bending and binding, lifting and placing in position as per design complete including cost of bars with binding wires of 18 gauges includind cost of all materials, labour, conveyance, loading and unloading with taxes, cess, royalties, sundries, tools and plants etc. complete as per the direction of the Engineer-in-charge.	7.49	qtl.	6,271.13	46,971.00
7	12mm thick cement plaster in cm (1:6) finishing smooth to brick work wall after racking out the joints including watering and curing with all cost, conveyance, royalty of all materials, labour with T & P required for the work including all taxes etc. complete in all respect as directed by Engineer-in-charge.	329.88	sqm.	138.48	45,682.00
8	16mm thick cement plaster in cm (1:6) finishing smooth to brick work wall after racking out the joints including watering and curing with all cost, conveyance, royalty of all materials, labour with T & P required for the work including all taxes etc. complete in all respect as directed by Engineer-in-charge.	329.88	sqm.	196.84	64,934.00
9	20mm thick cement plaster in cm (1:6) finishing smooth to brick work wall after racking out the joints including watering and curing with all cost, conveyance, royalty of all materials, labour with T & P required for the work including all taxes etc. complete in all respect as directed by Engineer-in-charge.	157.54	sqm.	207.30	32,658.00
10	Cement Washing one coats with watering, curing etc. complete including cost, conveyance, taxes, cess, royalty of materials with cost of labour and T & P required for the work etc. complete in all respect as per the direction of Engineer-in-charge.	817.29	sqm.	13.20	10,788.00
11	Priming one coat to Plastered wall surface with wall primer(water bound) complete including cost, taxes, cess of materials with cost of labour and T & P required for the work complete in all respect as per the direction of Engineer-in-charge.	817.29	sqm.	67.34	55,036.00

[Signature]
30.04.21
AEE 11


[Signature]
07.05.2021
Block Development Officer
PATNA, KEONJHAR

12	Wall painting two coats on wall surface with approved shade of Weather coat complete including cost, conveyance, taxes, cess, royalty of materials with cost of labour and T & P required for the work etc. complete in all respect as per the direction of E.I.C.	781.11	sqm.	80.09	62,559.00
13	Cost of Display board	1.00	no.	2,680.00	2,680.00
				Total	11,60,714.10
				Grand Total	11,60,714.00


(Rupees Eleven Lakhs Sixty Thousand Seven Hundred fourteen only)

Tender Schedule for the Project "Const. of boundary wall of Bhaliadal Nodal U.P. School, Mirigikhoji" under Mirigikhoji GP under OMBADC fund of Patna Block is approved for Rs 11,60,714.00 (Rupees Eleven Lakhs Sixty Thousand seven hundred fourteen only) with 13 (Thirteen) no.s of items only.

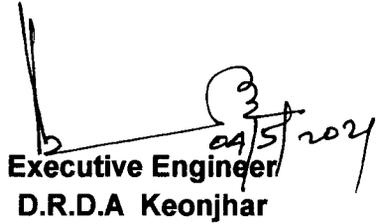
GST Cost in 12 % (6.0% CGST+ 6.0% SGST) will be added during the time of agreement.


30.04.21.

**Asst. Executive Engineer
Patna Block**


03.05.2021

**Block Development officer
Patna Block**


03/05/2021

**Executive Engineer
D.R.D.A Keonjhar**

My /Our quoted rate is _____ % Excess / Less/ Equal
to the corresponding estimate rate.
(Write both in words and Figures)

Notes:-

- 1 The Contractor should not write anything except quoting of percentage, excess/ less / equal to the amount put to Tender and in any case any thing else regarding tender rate is mentioned, the Tender is liable for rejection
- 2 Strike out which are not applicable.
- 3 Percentage quoted by the contractor shall be accurately filled in figure and words, so that there is no discrepancy.
- 4 If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractor in words shall taken as correct.
- 5 The percentage quoted in the tender without mentioning excess or less will be treated as excess.
- 6 The contractor should write percentage, excess or less upto two decimal point only. If he/her writes the percentage excess or less more than two decimal points, it will be treated as cancelled.

**Signature of the Contractor.
With address**