

## BILL OF QUANTITY (BOQ)

NAME OF THE WORK: - CONSTRUCTION OF BOUNDARY WALL AT AMARANGA UGUPS.

Amount put to Tender	:	Rs. 11,53,202.00
EMD	:	Exempted vide letter no 5984 dt. 27.04.2021 of Works Deptt.
Class of Contractor	:	D' & C' class only
Cost of Tender Paper	:	Rs.6000.00
Rate of Sale of Tender Paper	:	
Rate of Receipt of Tender Paper	:	
Date of Opening of Tender	:	
Date required for completion	:	6 (Six) calendar Month

Sl. no.	Item of Work	Quantity	Unit	Rate	Amount
1	Earthwork in excavation of foundation in hard soil or gravelly soil except sheet rock requiring blasting to proper profile with all leads, lifts and delifts to proper section and profile including dressing and levelling the bed upto required depth . as per direction of Engineer-in-charge.	93.60	cum	182.80	17110.00
2	Supplying, filling in foundation and plinth with sand, watered and rammed including cost, conveyance & royalty and all taxces of materials cost of all labour with T&P etc. complete. as per direction of Engineer-in-charge.	15.60	cum	366.84	5723.00
3	P.C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of Engineer incharge.	15.60	cum	4775.79	74502.00
4	R.C.C M20 grade using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of Engineer incharge.				
a.	Plinth beam	9.75	cum	5275.59	51437.00
5	Cost of M.S.Rod with Straightening, cutting, bending, binding of M.S rod or Tor steel, tying up the grills and placing in position including cost of binding wire with all cost conveyance, taxes etc completed in all respect as per the direction of Engineer in charge.	8.78	Qntl	6479.06	56886.00
6	Fly ash brick massonary with cement mortar (1:6) in foundation and plinth including cost, conveyance, royalty, taxes of all materials, all labour T & P sundries etc complete as per direction of Engineer in charge.	78.00	Cum	4251.16	331590.00

7	Brick work with Fly ash brick with cement mortar (1:6) in superstructure including cost, conveyance, royalty, taxes of all materials, all labour & P sundries etc complete as per direction of Engineer in charge.	89.05	Cum	4289.11	381945.00
8	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall including cost ,conveyance etc as per direction of Engineer-in-charge	988.00	Sqm	198.15	195772.00
9	Finishing wall with water proof cement paint of approved shade on new work (two coats) to give an even shade including cost of cement paint, including all cost, taxes etc complete as per direction of Engineer in charge.	988.00	Sqm	34.65	34237.00
10	Const. of a Display Board with painting.	1.00	Nos	4000.00	4000.00

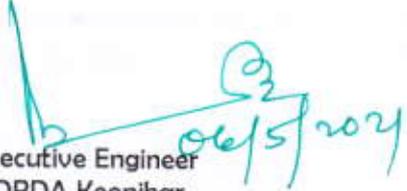
Total Rs. 11,53,202.00

N.B : LABOUR CESS 1% WILL BE ADDED & RECOVERED AT THE TIME OF PREPARING THE BILL.

TOTAL 10 (Ten) NOS ITEM ONLY

Approved for 10 (Ten) items only

  
Assistant Engineer  
Anandapur Block

  
Executive Engineer  
DRDA Keonjhar

**TO BE FILLED BY THE TENDERER**

1) My / Our quoted rate is (both in figure and words)

Equal to Estimate Cost

Excess in Percentage

Less in Percentage

	in Figure	In words
	%	
	%	
	%	

**Notes:-**

- 1) The Tenderer should quote the percentage up to one decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

Executive Engineer  
DRDA Keonjhar

  
Block Development Officer  
Anandapur Block