

**BILL OF QUANTITY (BOQ)**

N/W- Construction of Khela Padia at Talapada

Amount put to Tender :- Rs 3860516.00

Cost of Tender Paper :- Rs 6000.00

Class of Contractor :- C & B Class only

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	2	3	4	5	6
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer-in-Charge.	Cum	308.98	210.37	65001.00
2	Earth work excavation in hard soil/ Gravelly soil by manual means from 1.5 upto 3m as direction of EIC	Cum	1.91	227.06	433.00
3	Excavation,loading,unloading and carriage by mechanical means of all kinds of soil including stoney earth, gravel and moorum etc. interspread with boulders upto 1/2 cum size all lifts and delifts including trimming of slopes and bed to design section and depositing the excavated materials away from work site as per the specification and as directed by the E.I.C within initial lead of 3 km from the place of excavation etc. complete.	Cum	1670.34	125.30	209293.00
4	Filling foundation & plinth with coarse sand well watered and rammed as per the direction of Engineer in charge etc complete as per the direction of the Engineer-in-Charge.	Cum	182.47	559.04	102008.00
5	C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.	Cum	24.74	6230.72	154121.00
6	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in foundation and plinth including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	71.50	5832.98	417042.00
7	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in Superstructure including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	89.97	5871.31	528244.00
8	Honey comb masonry with 25cm x12cm x8cm size Fly ash bricks havingcrushing strengthnot less than 75 kg/cm <sup>2</sup> in cement mortrar (1:4) and plastered with 16mm, thick cement mortar (1:6) including white washing 2 coats	Sqm	142.31	1419.68	202038.00
9	R.C.C M-20 using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.				
	A- Column Base	Cum	1.73	6777.58	11712.00
	B- Plinth beam	Cum	13.43	7599.10	102018.00



10	Plain Cement Concrete of M-15 grade using 20 mm and down size hard crusher broken granite stone chips of approved quality & from approved quarry including lowering, laying the concrete, watering and curing etc. complete to required levels laid in layers including cost, conveyance, royalties & taxes of all materials & cost of all labour with T & P required for the work etc all complete in all respect as per Direction of the Engineer in charge .	Cum	28.63	12542.69	359124.00
11	Supplying,fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification including,cutting,bending and tying etc all complete as per the direction of the Engineer-in-Charge.	Qntl	13.43	9239.70	124043.00
12	12mm thick cement plaster in c.m (1:6) over brick or stone work including cost,conveyance,royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	605.50	161.51	97794.00
13	12mm thick cement plaster (1:4) after racking out joints including watering & curring etc complete with cost, conveyance royalties & taxes of all materials & all labour with T & P required for the work etc. all complete in all respect as per the Direction of the Engineer in charge	Sqm	221.21	357.39	79058.00
14	16mm thick cement plaster in c.m (1:6) over brick or stone work including cost,conveyance,royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	531.45	228.26	121311.00
15	Priming 1 coat with any approved Primer for Plaster Surface	Sqm	1136.95	66.79	75940.00
16	Painting two coats over a coat of primer to MS Grill Gate	Sqm	25.50	218.97	5585.00
17	Wall painting 2 coats with Weather coat paint of approved shade on new work to give an even shade including cost of paint complete as per the direction of the Engineer-in-Charge.	Sqm	1136.95	113.25	128765.00
18	Painting two coats with whether coat over a coat of primer including all cost.	Sqm	221.21	180.05	39828.00
19	Suppling and fixing MS Grill Gate including cost conveyance taxes etc....	Kg	225.00	155.96	35091.00
20	Providing Press-cast M-35grade intrerlocking Paver Block of 60mm thick with appropriate colour combination with transportation to the site complete.and supplying all labour ,T&P for laying of Pre-cast M-35 grade interlocking 60mm thick Concrete Paver Blocks of standard size ,shape and colour over sand bed of required thickness and compaction with compactor - cum- vibrater machine to proper secreting I, e. Zero on Zero for complete laying area in 8-stage process as directed by Engg-in-charge.	Sqm	625.00	1030.29	643934.00
21	GI square tube section wrought and put up at truss and purlin including febrication and eraction with all complete as per direction of EIC.	Kg	811.47	165.59	134370.00
22	Supplying and fixing Colour G.C.I sheet on roof drilling hole in wind ties including fixing of ridges valley etc excluding cost of fittings.	Sqm	33.12	563.90	18676.00

23	Labour for fixing of G.C.I. Sheet in roof drilling hole in wind ties including fixing of ridges valleys wind ties etc. excluding cost of fitting.	Sqm	28.80	178.91	5153.00
24	Suppling and fixing of precast chair with all labour and material	No	44.00	4000.00	176000.00
25	2.5cm thick A.S.flooring with c.c(1:2:4)using 12mm size cbhg chips including cost,conveyance,royalty,taxes etc all complete.	Sqm	13.80	350.21	4833.00
26	Supplying and placing of concrete well rings	No	10.00	800.00	8000.00
27	Concrete cover	No	2.00	400.00	800.00
28	Volyball net	No	1.00	1500.00	1500.00
29	Cost of grass seed				4564.00
30	Cost of Brick Masonry Display Board of 5'0"× 0'10"× 5'0" size to be erected at worksite with colouring and painting writing with logo complete as per the direction of the Engineer-in-Charge.	No	1.00	4237.00	4237.00
Total Rs					3860516.00
or Say					3860516.00

Total 30 (Thirty) no of item only.

GST-18% will be added at the time of Agreement over the quoted amount.

Approved for 30(Thirty) items only

*Behesa*  
16/8/23  
Asst.Exe. Engineer  
Telkoi Block.

*[Signature]*  
16/8/23  
Block Development Officer  
Telkoi.

*[Signature]*  
16/8/23  
Addl. Executive Officer(Technical)  
Zilla Parishad, Keonjhar

**TO BE FILLED BY THE TENDERER**

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

Excess in Percentage

Less in Percentage

in Figure	In words
%	
%	
%	

**Notes:-**

- 1) The Tenderer should quote the percentage up to **two decimal point** only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

*[Signature]*  
16/8/23  
Block Development Officer  
Telkoi.

**BILL OF QUANTITY (BOQ)**

N/W- Construction of Khela Padia at Binjabahal

Amount put to Tender :- Rs 4727693.00

Cost of Tender Paper :- Rs 6000.00

Class of Contractor :- 'B' Class only

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	2	3	4	5	6
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer-in-Charge.	Cum	357.06	210.37	75114.00
2	Earth work excavation in hard soil/ Gravelly soil by manual means from 1.5 upto 3m as direction of EIC	Cum	1.91	227.06	433.00
3	Excavation,loading,unloading and carriage by mechanical means of all kinds of soil including stoney earth, gravel and maorum etc. interspread with boulders upto 1/2 cum size all lifts and delifts including trimming of slopes and bed to design section and depositing the excavated materials away from work site as per the specification and as directed by the E.I.C within initial lead of 3 km from the place of excavation etc. complete.	Cum	3570.00	125.30	447321.00
4	Filling foundation & plinth with corse sand well watered and rammed as per the direction of Engineer in charge etc complete as per the direction of the Engineer-in-Charge.	Cum	202.26	559.04	113071.00
5	C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.	Cum	29.67	5868.71	174110.00
6	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in foundation and plinth including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	84.96	5770.02	490243.00
7	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in Superstructure including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	107.97	5808.35	627132.00
8	Honey comb masonry with 25cm x12cm x8cm size Fly ash bricks havingcrushing strengthnot less than 75 kg/cm <sup>2</sup> in cement mortrar (1:4) and plastered with 16mm, thick cement mortar (1:6) including white washing 2 coats	Sqm	170.78	1405.23	239978.00
9	R.C.C M-20 using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.				
	A- Column Base	Cum	1.73	6459.80	11163.00
	B- Plinth beam	Cum	15.98	7281.32	116319.00

10	Plain Cement Concrete of M-15 grade using 20 mm and down size hard crusher broken granite stone chips of approved quality & from approved quarry including lowering, laying the concrete, watering and curing etc. complete to required levels laid in layers including cost, conveyance, royalties & taxes of all materials & cost of all labour with T & P required for the work etc all complete in all respect as per Direction of the Engineer in charge .	Cum	33.59	12195.46	409586.00
11	Supplying,fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification including,cutting,bending and tying etc all complete as per the direction of the Engineer-in-Charge.	Qntl	15.98	9227.09	147403.00
12	12mm thick cement plaster in c.m (1:6) over brick or stone work including cost,conveyance,royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	724.50	160.38	116197.00
13	12mm thick cement plaster (1:4) after racking out joints including watering & curring etc complete with cost, conveyance royalties & taxes of all materials & all labour with T & P required for the work etc. all complete in all respect as per the Direction of the Engineer in charge	Sqm	262.49	349.65	91777.00
14	16mm thick cement plaster in c.m (1:6) over brick or stone work including cost,conveyance,royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	633.45	226.91	143737.00
15	Priming 1 coat with any approved Primer for Plaster Surface	Sqm	1357.95	66.79	90701.00
16	Painting two coats over a coat of primer to MS Grill Gate	Sqm	25.50	218.97	5585.00
17	Wall painting 2 coats with Weather coat paint of approved shade on new work to give an even shade including cost of paint complete as per the direction of the Engineer-in-Charge.	Sqm	1357.95	113.25	153795.00
18	Painting two coats with whether coat over a coat of primer including all cost.	Sqm	262.49	180.05	47260.00
19	Suppling and fixing MS Grill Gate including cost conveyance taxes etc....	Kg	225.00	155.96	35091.00
20	Providing Press-cast M-35grade intrerlocking Paver Block of 60mm thick with appropriate colour combination with transportation to the site complete.and supplying all labour ,T&P for laying of Pre-cast M-35 grade interlocking 60mm thick Concrete Paver Blocks of standard size ,shape and colour over sand bed of reqired thickness and compaction with compactor - cum- vibrator machine to proper secreting i.e. Zero on Zero for complete laying area in 8-stage process as directed by Engg-in-charge.	Sqm	748.83	1027.97	769767.00
21	GI square tube section wrought and put up at truss and purlin including febrication and eraction with all complete as per direction of EIC.	Kg	811.47	165.47	134273.00
22	Supplying and fixing Colour G.C.I sheet on roof drilling hole in wind ties including fixing of ridges valley etc excluding cost of fittings.	Sqm	33.12	563.90	18676.00

23	Labour for fixing of G.C.I. Sheet in roof drilling hole in wind ties including fixing of ridges valleys wind ties etc. excluding cost of fitting.	Sqm	28.80	178.91	5153.00
24	Suppling and fixing of precast chair with all labour and material	No	60.00	4000.00	240000.00
25	2.5cm thick A.S.flooring with c.c(1:2:4)using 12mm size cbhg chips including cost,conveyance,royalty,taxes etc all complete.	Sqm	13.80	341.15	4708.00
26	Supplying and placing of concrete well rings	No	10.00	800.00	8000.00
27	Concrete cover	No	2.00	400.00	800.00
28	Volyball net	No	1.00	1500.00	1500.00
29	Cost of grass seed				4563.00
30	Cost of Brick Masonry Display Board of 5'0"× 0'10"× 5'0" size to be erected at worksite with colouring and painting writing with logo complete as per the direction of the Engineer-in-Charge.	No	1.00	4237.00	4237.00
				Total Rs	4727693.00
				or Say	4727693.00


Total 30 (Thirty) no of item only.

GST-18% will be added at the time of Agreement over the quoted amount.

Approved for 30(Thirty) items only

  
Asst. Exe. Engineer  
Telkoi Block.

  
Block Development Officer  
Telkoi.

  
Addl. Executive Officer(Technical)  
Zilla Parishad, Keonjhar

**TO BE FILLED BY THE TENDERER**

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

Excess in Percentage

Less in Percentage

in Figure	In words
%	
%	
%	

**Notes:-**

- 1) The Tenderer should quote the percentage up to two decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

  
Block Development Officer  
Telkoi.

BILL OF QUANTITY (BOQ)

N/W:- Construction of Laboratories for Botany and Zoology of Anchalika Bigyan HSS, Sirigida under Telkoi Block.

Amount put to Tender:- Rs 2024727.00

Cost of Tender Paper:- Rs 6000.00

Class of Contractor:- C & B Class only

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer-in-Charge.	Cum	70.43	210.37	14816.00
2	Filling foundation & plinth with coarse sand well watered and rammed as per the direction of Engineer in charge etc complete as per the direction of the Engineer-in-Charge.	Cum	74.46	695.84	51812.00
3	C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.	Cum	17.89	6118.37	109458.00
4	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in foundation and plinth including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	21.57	5270.84	113692.00
5	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in Superstructure including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	30.62	5309.17	162567.00
6	RCC work of M -20 grade with 20mm and down grade black hard granite crusher broken chips including hoisting, cost, conveyance, royalty and taxes and including centring, shuttering etc all complete as per the direction of the Engineer-in-Charge.				
a)	Column base	Cum	14.59	6542.98	95462.00
b)	Plinth band	Cum	5.15	7364.50	37927.00
c)	Column:-	Cum	3.78	14224.81	53770.00
d)	Roof Beam	Cum	3.59	14224.81	51067.00
e)	Lintel	Cum	2.89	13589.40	39273.00
f)	Chajja	Sqm	16.53	1145.93	18942.00
g)	Roof Slab	Cum	15.52	12856.35	199531.00
7	Supplying, fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification including, cutting, bending and tying the grills etc all complete as per the direction of the Engineer-in-Charge.	Qntl	53.81	9239.70	497191.00

8	Suppling and fixing MS doors and windows cost conveyance taxes etc. complete as per the direction of the Engineer-in-Charge.	Kg	640.00	155.96	99814.00
9	16mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	181.76	225.01	40898.00
10	12mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	208.73	158.80	33146.00
11	6mm thick cement plater in CM(1:4) to RCC surfaces finished smooth including closed deep chiping and slurry treatment as per the direction of the Engineer-in-Charge.	Sqm	56.54	163.28	9232.00
12	Fixing of Vetrified tiles in floors treads or steps and landing on 25mm thick of bed of cement mortar(1:1) jointed with neat cement slury mixed with pigments to match the shades of the tiles including rubbing and polishing complete as per the direction of the Engineer-in-Charge.	Sqm	110.02	1480.79	162917.00
13	Fixing Vetrified tiles in dados skirting and risers of of steps on 12mm thick cement plaster(1:3) jointed with neat cement slurry mixed wit pigments to match the shades of the tiles including rubbing and polishing complete including cost of tiles as per the direction of the Engineer-in-Charge.	Sqm	8.03	1595.46	12812.00
14	Fixing of Chequred tiles in floors treads or steps and landing on 25mm thick of bed of cement mortar(1:1) jointed with neat cement slury mixed with pigments to match the shades of the tiles including rubbing and polishing complete as per the direction of the Engineer-in-Charge.	Sqm	13.70	968.63	13270.00
15	Painting two coats of enamel paint to the door & window over a coat of primer as per the direction of the Engineer-in-Charge.	Sqm	46.40	218.97	10160.00
16	Finishing surface of walls with acrylic wall putty of approved make and finished smooth and even surface to receive painting including cost of all materials taxes, labour T & P etc complete as per the direction of the Engineer-in-Charge.	Sqm	280.33	142.72	40010.00
17	Priming one coat with any approved primer of wall primer over putty surface as per the direction of the Engineer-in-Charge.	Sqm	489.06	66.79	32666.00
18	Cement wash one coat over new plaster work outer side surface as per the direction of the Engineer-in-Charge.	Sqm	208.73	14.80	3089.00
19	Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint as per the direction of the Engineer-in-Charge.	Sqm	280.33	91.97	25783.00
20	Supplying and applying of approved quality 2 coat wheather paint over outer side finishing area as per the direction of the Engineer-in-Charge.	Sqm	208.73	113.25	23640.00

21	20mm thick graded cement plaster in cement plaster(1:4) over roof slab including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	121.33	248.64	30168.00
22	Supplying, fitting and fixing of Stainless steel of 304 grade in hand railing using 50mm. dia. of 2mm thick circular pipe with Balustrade of size 32mm x 32mm. x 2mm @ 0.90mtr. C/C and stainless square pipe bracing of size 32mm x 32mm x 2mm in 3 rows in stair case as per approved design and specification, buffing, polishing etc. with cost, conveyance, taxes of all materials, labour, T&P etc.. required for the complete in all respect as per the direction of the Engineer-in-Charge	Rmt	8.69	3518.60	30577.00
23	Cost of Black board of (12'X4' size)	Nos	2	3000.00	6000.00
24	Cost of Skylight	Nos	8	100.00	800.00
25	Cost of Brick Masonry Display Board of 5'0" x 0'10" x 5'0" size to be erected at worksite with colouring and painting writing with logo complete as per the direction of the Engineer-in-Charge.	Nos	1	4237.00	4237.00
				Total	2024727.00
				or Say	2024727.00

Total 25 (Twentyfive) no of item only.

N.B.- GST-18% will be added at the time of Agreement over the quoted amount.

Approved for 25 (Twentyfive) items only

  
Asst. Exe. Engineer  
Telkoi Block.

  
Block Development Officer,  
Telkoi.

  
Addl. Executive Officer (Technical)  
Zilla Parishad, Keonjhar

**TO BE FILLED BY THE TENDERER**

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

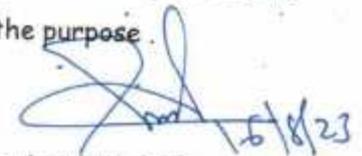
Excess in Percentage

Less in Percentage

**Notes:-**

- 1) The Tenderer should quote the percentage up to two decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose.
- 4) The percentage quoted at any other place will not be taken into consideration.

in Figure	In words
%	
%	
%	

  
Block Development Officer  
Telkoi.

BILL OF QUANTITY (BOQ)

N/W:- Construction of E-Library and Boundary wall of Charigarh H.S.S., Telkoi

Amount put to Tender:- Rs 3613231.00

Cost of Tender Paper:- Rs 6000.00

Class of Contractor:- C & B Class only

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer-in-Charge.	Cum	110.88	210.37	23326.00
2	Filling foundation & plinth with coarse sand well watered and rammed as per the direction of Engineer in charge etc complete as per the direction of the Engineer-in-Charge.	Cum	177.93	564.34	100414.00
3	C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.	Cum	35.60	5907.26	210299.00
4	Cement Concrete (1:2:4) with 12mm size cbhg chips including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	2.84	7238.80	20558.00
5	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in foundation and plinth including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	55.82	5763.44	321701.00
6	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in Superstructure including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	75.45	5801.77	437744.00
6	RCC work of M -20 grade with 20mm and down grade black hard granite crusher broken chips including hoisting, cost, conveyance, royalty and taxes and including centring, shuttering etc all complete as per the direction of the Engineer-in-Charge.				
a)	Column base	Cum	19.79	6388.29	126424.00
b)	Plinth band	Cum	10.90	7209.81	78587.00
c)	Column:-	Cum	6.03	14070.11	84808.00
d)	Roof Beam	Cum	5.44	14070.11	76541.00
e)	Lintel	Cum	3.81	13434.71	51186.00
f)	Chajja	Sqm	31.34	1135.61	35590.00
g)	Roof Slab	Cum	24.95	12701.66	316906.00

7	Supplying, fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification including, cutting, bending and tying the grills etc all complete as per the direction of the Engineer-in-Charge.	Qntl	79.23	9214.48	* 730085.00
8	Suppling and fixing MS doors and windows cost conveyance taxes etc. complete as per the direction of the Engineer-in-Charge.	Kg	1004.00	155.96	156584.00
9	16mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	413.03	226.49	93547.00
10	12mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	465.97	160.03	74570.00
11	6mm thick cement plater in CM(1:4) to RCC surfaces finished smooth including closed deep chiping and slurry treatment as per the direction of the Engineer-in-Charge.	Sqm	87.57	163.43	14312.00
12	Fixing of Vetrified tiles in floors treads or steps and landing on 25mm thick of bed of cement mortar(1:1) jointed with neat cement slury mixed with pigments to match the shades of the tiles including rubbing and polishing complete as per the direction of the Engineer-in-Charge.	Sqm	181.38	1469.42	266524.00
13	Fixing Vetrified tiles in dados skirting and risers of of steps on 12mm thick cement plaster(1:3) jointed with neat cement slurry mixed wit pigments to match the shades of the tiles including rubbing and polishing complete including cost of tiles as per the direction of the Engineer-in-Charge.	Sqm	9.66	1587.64	15337.00
14	Fixing of Chequred tiles in floors treads or steps and landing on 25mm thick of bed of cement mortar(1:1) jointed with neat cement slury mixed with pigments to match the shades of the tiles including rubbing and polishing complete as per the direction of the Engineer-in-Charge.	Sqm	60.07	957.26	57503.00
15	Painting two coats of enamel paint to the door & window over a coat of primer as per the direction of the Engineer-in-Charge.	Sqm	66.89	218.97	14647.00
16	Finishing surface of walls with acrylic wall putty of approved make and finished smooth and even surface to receive painting including cost of all materials taxes, labour T & P etc complete as per the direction of the Engineer-in-Charge.	Sqm	432.05	142.72	61664.00
17	Priming one coat with any approved primer of wall primer over putty surface as per the direction of the Engineer-in-Charge.	Sqm	1046.22	66.79	69880.00
18	Cement wash one coat over new plaster work outer side surface as per the direction of the Engineer-in-Charge.	Sqm	614.17	14.80	9088.00



19	Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint as per the direction of the Engineer-in-Charge.	Sqm	432.05	91.97	39737.00
20	Supplying and applying of approved quality 2 coat weather paint over outer side finishing area as per the direction of the Engineer-in-Charge.	Sqm	614.17	113.25	69558.00
21	20mm thick graded cement plaster in cement plaster(1:4) over roof slab including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	195.01	249.78	48710.00
22	Cost of 100mm dia PVC pipe to be fixed in roof for drainage of rain water	Rmt	2.74	789.89	2164.00
23	Cost of Skylight	Nos	10	100.00	1000.00
24	Cost of Brick Masonry Display Board of 5'0" x 0'10" x 5'0" size to be erected at worksite with colouring and painting writing with logo complete as per the direction of the Engineer-in-Charge.	Nos	1	4237.00	4237.00
				Total	3613231.00
				or Say	3613231.00

Total 24 (Twentyfour) no of item only.

N.B.- GST-18% will be added at the time of Agreement over the quoted amount.

Approved for 24 (Twentyfour) items only

  
Asst. Exe. Engineer  
Telkoi Block.

  
Block Development Officer,  
Telkoi.

  
Addl. Executive Officer (Technical)  
Zilla Parishad, Keonjhar

**TO BE FILLED BY THE TENDERER**

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

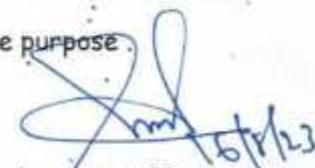
Excess in Percentage

Less in Percentage

in Figure	In words
%	
%	
%	

**Notes:-**

- 1) The Tenderer should quote the percentage up to two decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before 1
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose.
- 4) The percentage quoted at any other place will not be taken into consideration.

  
Block Development Officer  
Telkoi.

**BILL OF QUANTITY (BOQ)**

N/W:- Construction of Addl. Class Room for Honours Class-5nos, Girl's Comon Room with attached Toilet & 2nos Toilet in the existing Comon Room of Charigarh Mahavidyalaya, Telkoi.

Amount put to Tender:- Rs 8060371.00

Cost of Tender Paper:- Rs 10000.00

Class of Contractor:- 'B' Class only

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer-in-Charge.	Cum	172.95	210.37	36383.00
2	Filling foundation & plinth with coarse sand well watered and rammed as per the direction of Engineer in charge etc complete as per the direction of the Engineer-in-Charge.	Cum	271.71	564.34	153337.00
3	C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.	Cum	51.97	5907.26	307000.00
4	Cement Concrete (1:2:4) with 12mm size cbhg chips including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	4.36	7238.80	31561.00
5	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in foundation and plinth including cost, conveyance, royalty	Cum	78.16	5763.44	450470.00
6	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in Superstructure including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Cum	70.39	5801.77	408387.00
	B. First Floor:-	Cum	103.43	6089.45	629832.00
7	RCC work of M -20 grade with 20mm and down grade black hard granite crusher broken chips including hoisting, cost, conveyance, royalty and taxes and including centring, shuttering etc all complete as per the direction of the Engineer-in-Charge.				
a)	Column base	Cum	30.11	6388.29	192351.00
b)	Plinth band	Cum	11.92	7209.81	85941.00
c)	Column:-				
	A. Ground Floor:-	Cum	6.94	14070.11	97647.00
	B. 1st Floor:-	Cum	8.05	15159.47	122034.00
d)	Roof Beam				

	A. Ground Floor:-	Cum	9.05	14070.11	127335.00
	B. 1st Floor:-	Cum	7.53	15159.47	114151.00
e)	Lintel				
	A. Ground Floor:-	Cum	5.89	13434.71	79130.00
	B. 1st Floor:-	Cum	4.75	13953.65	66280.00
f)	Chajja				
	A. Ground Floor	Sqm	25.39	1135.61	28833.00
	B. 1st Floor:-	Sqm	25.39	1205.74	30614.00
g)	Roof Slab				
	A. Ground Floor	Cum	34.11	12701.66	433254.00
	B. 1st Floor:-	Cum	30.24	13375.27	404468.00
h)	Stair Case:-				
	A. Ground Floor	Cum	2.23	14095.29	31432.00
	B. 1st Floor:-	Cum	2.23	15129.76	33739.00
8	Supplying, fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification including, cutting, bending and tying the grills etc all complete as per the direction of the Engineer-in-Charge.				
	A. Ground Floor	Qntl	117.53	9214.48	1083010.00
	B. 1st Floor:-	Qntl	54.75	9240.12	505896.00
9	Suppling and fixing MS doors and windows cost conveyance taxes etc. complete as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Kg	1080.00	155.96	168437.00
	B. First Floor:-	Kg	1526.50	155.96	238073.00
10	16mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	444.49	226.49	100672.00
	B. First Floor:-	Sqm	380.47	231.80	88193.00
11	12mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.				0.00
	A. Ground Floor:-	Sqm	563.76	160.03	90219.00
	B. First Floor:-	Sqm	380.47	165.97	63148.00
12	6mm thick cement plater in CM(1:4) to RCC surfaces finished smooth including closed deep chiping and slurry treatment as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	87.41	163.43	14286.00
	B. First Floor:-	Sqm	86.08	167.36	14406.00

13	Fixing of Vetrified tiles in floors treads or steps and landing on 25mm thick of bed of cement mortar(1:1) jointed with neat cement slury mixed with pigments to match the shades of the tiles including rubbing and polishing complete as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	209.09	1469.42	307241.00
	B. First Floor:-	Sqm	192.44	1492.26	287170.00
14	Fixing Vetrified tiles in dados skirting and risers of of steps on 12mm thick cement plaster(1:3) jointed with neat cement slurry mixed wit pigments to match the shades of the tiles including rubbing and polishing complete including cost of tiles as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	12.75	1587.64	20242.00
	B. First Floor:-	Sqm	16.40	1620.49	26576.00
15	Fixing of Kodappa tiles in floors treads or steps and landing on 25mm thick of bed of cement mortar(1:1) jointed with neat cement slury mixed with pigments to match the shades of the tiles including rubbing and polishing complete as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	13.75	1071.38	14731.00
	B. First Floor:-	Sqm	13.75	1096.35	15075.00
16	Fixing Kodappa tiles in dados skirting and risers of of steps on 12mm thick cement plaster(1:3) jointed with neat cement slurry mixed wit pigments to match the shades of the tiles including rubbing and polishing complete including cost of tiles as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	5.85	1140.15	6670.00
	B. First Floor:-	Sqm	5.85	1172.99	6862.00
17	Fixing of Ceramic tiles in floors treads or steps and landing on 25mm thick of bed of cement mortar(1:1) jointed with neat cement slury mixed with pigments to match the shades of the tiles including rubbing and polishing complete as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	31.22	1044.92	32622.00
18	Fixing Ceramic wall tiles in dados skirting and risers of of steps on.12mm thick cement plaster(1:3) jointed with neat cement slurry mixed wit pigments to match the shades of the tiles including rubbing and polishing complete including cost of tiles as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	140.02	1250.22	175056.00

19	Fixing of Chequered tiles in floors treads or steps and landing on 25mm thick of bed of cement mortar(1:1) jointed with neat cement slury mixed with pigments to match the shades of the tiles including rubbing and polishing complete as per the direction of the Engineer-in-Charge.	Sqm	113.34	957.26	108496.00
	Ramp	Sqm			0.00
20	Painting two coats of enamel paint to the door & window over a coat of primer as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	76.50	218.97	16751.00
	B. First Floor:-	Sqm	94.94	224.29	21294.00
21	Finishing surface of walls with acrylic wall putty of approved make and finished smooth and even surface to receive painting including cost of all materials taxes, labour T & P etc complete as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	560.62	142.72	80014.00
	B. First Floor:-	Sqm	555.49	144.17	80083.00
22	Priming one coat with any approved primer of wall primer over putty surface as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	1147.23	66.79	76627.00
	B. First Floor:-	Sqm	1972.83	68.40	134938.00
23	Cement wash one coat over new plaster work outer side surface as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	563.76	14.80	8342.00
	B. First Floor:-	Sqm	380.47	15.05	5726.00
24	Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	560.62	91.97	51562.00
	B. First Floor:-	Sqm	555.49	93.67	52035.00
25	Supplying and applying of approved quality 2 coat weather paint over outer side finishing area as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	563.76	113.25	63849.00
	B. First Floor:-	Sqm	380.47	116.09	44169.00
26	20mm thick graded cement plaster in cement plaster(1:4) over roof slab including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.				
	A. Ground Floor:-	Sqm	44.74	249.78	11175.00
	B. First Floor:-	Sqm	241.60	255.09	61630.00
27	Supplying providing & fixing of PVC Door as per the direction of the Engineer-in-Charge.	Sqm	9.06	4280.25	38773.00

8

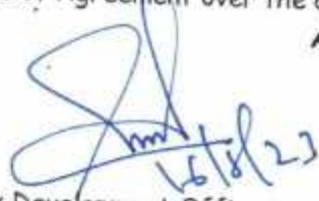
28	Supplying, fitting and fixing of Stainless steel of 304 grade in hand railing using 50mm. dia. of 2mm thick circular pipe with Balustrade of size 32mm x 32mm. x 2mm @ 0.90mtr. C/C and stainless square pipe bracing of size 32mm x 32mm x 2mm in 3 rows in stair case as per approved design and specification, buffing, polishing etc. with cost, conveyance, taxes of all materials, labour, T&P etc.. required for the complete in all respect as per the direction of the Engineer-in-Charge.	Rmt	15.85	3518.60	55770.00
29	Cost of Black board of (12'X4' size)	Nos	5	3000.00	15000.00
30	100mm. dia. PVC pipe to be fitted for drainage of rain water from roof	Rmt	5.49	789.89	4336.00
31	Cost of Skylight	Nos	28	100.00	2800.00
32	Cost of Brick Masonry Display Board of 5'0" x 0'10" x 5'0" size to be erected at worksite with colouring and painting writing with logo complete as per the direction of the Engineer-in-Charge.	Nos	1	4237.00	4237.00
				Total	8060371.00
				or Say	8060371.00

Total 32 (Thirtytwo) no of item only.

N.B.- GST-18% will be added at the time of Agreement over the quoted amount.

Approved for 32 (Thirtytwo) items only

  
16/08/23  
Asst. Exe. Engineer  
Telkoi Block.

  
16/8/23  
Block Development Officer,  
Telkoi.

  
16/8/23  
Addl. Executive Officer (Technical)  
Zilla Parishad, Keonjhar

**TO BE FILLED BY THE TENDERER**

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

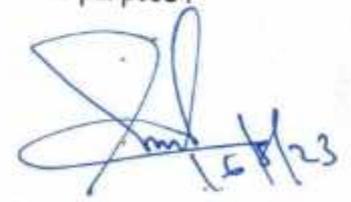
Excess in Percentage

Less in Percentage

Notes:-

- 1) The Tenderer should quote the percentage up to two decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before t.
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose.
- 4) The percentage quoted at any other place will not be taken into consideration.

in Figure	In words
%	
%	
%	

  
16/8/23  
Block Development Officer  
Telkoi.

**BILL OF QUANTITY (BOQ)**

N/W:- Construction of E-Library of Gopaljew H.S.S., Benamunda under Telkoi Block

Amount put to Tender:- Rs 2057482.00

Cost of Tender Paper:- Rs 6000.00

Class of Contractor:- C & B Class only

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer-in-Charge.	Cum	58.35	210.37	12275.00
2	Filling foundation & plinth with coarse sand well watered and rammed as per the direction of Engineer in charge etc complete as per the direction of the Engineer-in-Charge.	Cum	75.31	564.34	42500.00
3	C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.	Cum	18.38	6159.62	113214.00
4	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+/- 2percent in cement mortar(1:6) in foundation and plinth including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	20.30	5439.13	110414.00
5	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+/- 2percent in cement mortar(1:6) in Superstructure including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	37.60	5477.46	205952.00
6	RCC work of M -20 grade with 20mm and down grade black hard granite crusher broken chips including hoisting, cost, conveyance, royalty and taxes and including centring, shuttering etc all complete as per the direction of the Engineer-in-Charge.				
a)	Column base	Cum	11.33	6549.23	74203.00
b)	Plinth band	Cum	4.51	7370.76	33242.00
c)	Column:-	Cum	2.96	14231.06	42124.00
d)	Roof Beam	Cum	3.71	14231.06	52797.00
e)	Lintel	Cum	2.64	13595.66	35893.00
f)	Chajja	Sqm	25.16	1146.34	28842.00
g)	Roof Slab	Cum	16.99	12862.61	218536.00
7	Supplying, fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification including, cutting, bending and tying the grills etc all complete as per the direction of the Engineer-in-Charge.	Qntl	52.89	9258.61	489692.00

8	Suppling and fixing MS doors and windows cost conveyance taxes etc. complete as per the direction of the Engineer-in-Charge.	Kg	500.00	155.96	77980.00
9	16mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	199.29	225.79	44997.00
10	12mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	226.68	159.45	36143.00
11	6mm thick cement plater in CM(1:4) to RCC surfaces finished smooth including closed deep chiping and slurry treatment as per the direction of the Engineer-in-Charge.	Sqm	70.44	163.95	11549.00
12	Fixing of Vetrified tiles in floors treads or steps and landing on 25mm thick of bed of cement mortar(1:1) jointed with neat cement slury mixed with pigments to match the shades of the tiles including rubbing and polishing complete as per the direction of the Engineer-in-Charge.	Sqm	121.77	1490.68	181520.00
13	Fixing Vetrified tiles in dados skirting and risers of of steps on 12mm thick cement plaster(1:3) jointed with neat cement slurry mixed wit pigments to match the shades of the tiles including rubbing and polishing complete including cost of tiles as per the direction of the Engineer-in-Charge.	Sqm	7.49	1602.90	12006.00
14	Fixing of Chequred tiles in floors treads or steps and landing on 25mm thick of bed of cement mortar(1:1) jointed with neat cement slury mixed with pigments to match the shades of the tiles including rubbing and polishing complete as per the direction of the Engineer-in-Charge.	Sqm	17.22	978.52	16850.00
15	Painting two coats of enamel paint to the door & window over a coat of primer as per the direction of the Engineer-in-Charge.	Sqm	34.70	218.97	7598.00
16	Finishing surface of walls with acrylic wall putty of approved make and finished smooth and even surface to receive painting including cost of all materials taxes, labour T & P etc complete as per the direction of the Engineer-in-Charge.	Sqm	310.77	142.72	44354.00
17	Priming one coat with any approved primer of wall primer over putty surface as per the direction of the Engineer-in-Charge.	Sqm	537.45	66.79	35898.00
18	Cement wash one coat over new plaster work outer side surface as per the direction of the Engineer-in-Charge.	Sqm	226.68	14.80	3354.00
19	Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint as per the direction of the Engineer-in-Charge.	Sqm	310.77	91.97	28583.00
20	Supplying and applying of approved quality 2 coat wheather paint over outer side finishing area as per the direction of the Engineer-in-Charge.	Sqm	226.68	113.25	25673.00

21	20mm thick graded cement plaster in cement plaster(1:4) over roof slab including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	132.76	249.98	33188.00
22	Supplying, fitting and fixing of Stainless steel of 304 grade in hand railing using 50mm. dia. of 2mm thick circular pipe with Balustrade of size 32mm x 32mm. x 2mm @ 0.90mtr. C/C and stainless square pipe bracing of size 32mm x 32mm x 2mm in 3 rows in stair case as per approved design and specification, buffing, polishing etc. with cost, conveyance, taxes of all materials, labour, T&P etc.. required for the complete in all respect as per the direction of the Engineer-in-Charge.	Rmt	8.84	3518.60	31104.00
23	Cost of 100mm dia PVC pipe to be fixed in roof for drainage of rain water	Rmt	2.74	789.89	2164.00
24	Cost of Skylight	Nos	6	100.00	600.00
25	Cost of Brick Masonry Display Board of 5'0" x 0'10" x 5'0" size to be erected at worksite with colouring and painting writing with logo complete as per the direction of the Engineer-in-Charge.	Nos	1	4237.00	4237.00
				Total	2057482.00

or Say 2057482.00

Total 25 (Twentyfive) no of item only.

N.B.-GST-18% will be added at the time of Agreement over the quoted amount.

Approved for 25 (Twentyfive) items only

  
Asst. Exe. Engineer  
Telkoi Block.

  
Block Development Officer,  
Telkoi.

  
Addl. Executive Officer (Technical)  
Zilla Parishad, Keonjhar

**TO BE FILLED BY THE TENDERER**

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

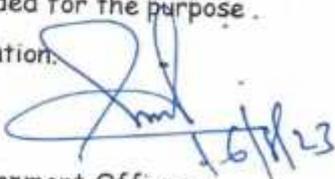
Excess in Percentage

Less in Percentage

**Notes:-**

- 1) The Tenderer should quote the percentage up to two decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before t
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose.
- 4) The percentage quoted at any other place will not be taken into consideration.

in Figure	In words
%	
%	
%	

  
Block Development Officer  
Telkoi

BILL OF QUANTITY (BOQ)

N/W- Construction of Khela Padia at Bhimkand

Amount put to Tender :- Rs 4015294.00

Cost of Tender Paper :- Rs 6000.00

Class of Contractor :- 'B' Class only

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	2	3	4	5	6
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer-in-Charge.	Cum	329.21	210.37	69256.00
2	Earth work excavation in hard soil/ Gravelly soil by manual means from 1.5 upto 3m as direction of EIC	Cum	1.91	227.06	433.00
3	Excavation,loading,unloading and carriage by mechanical means of all kinds of soil including stoney earth, gravel and moorum etc. interspread with boulders upto 1/2 cum size all lifts and delifts including trimming of slopes and bed to design section and depositing the excavated materials away from work site as per the specification and as directed by the E.I.C within initial lead of 3 km from the place of excavation etc. complete as per the direction of the Engineer-in-Charge.	Cum	1670.34	125.30	209293.00
4	Filling foundation & plinth with coarse sand well watered and rammed as per the direction of Engineer in charge etc complete as per the direction of the Engineer-in-Charge.	Cum	185.26	559.04	103570.00
5	C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.	Cum	27.53	6141.52	169071.00
6	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in foundation and plinth including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	79.13	5613.42	444201.00
7	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in Superstructure including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	100.15	5651.75	566026.00
8	Honey comb masonry with 25cm x12cm x8cm size Fly ash bricks havingcrushing strengthnot less than 75 kg/cm <sup>2</sup> in cement mortar (1:4) and plastered with 16mm, thick cement mortar (1:6) including white washing 2 coats complete as per the direction of the Engineer-in-Charge.	Sqm	158.40	1375.62	217898.00
9	R.C.C M-20 using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.				
	A- Column Base	Cum	1.73	6693.95	11567.00
	B- Plinth beam	Cum	14.85	7515.47	111605.00



10	Plain Cement Concrete of M-15 grade using 20 mm and down size hard crusher broken granite stone chips of approved quality & from approved quarry including lowering, laying the concrete, watering and curing etc. complete to required levels laid in layers including cost, conveyance, royalties & taxes of all materials & cost of all labour with T & P required for the work etc all complete in all respect as per Direction of the Engineer	Cum	28.63	12459.07	356730.00
11	Supplying, fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification including, cutting, bending and tying etc all complete as per the direction of the Engineer-in-Charge	Qntl	14.85	9239.70	137210.00
12	12mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	672.00	158.72	106661.00
13	12mm thick cement plaster (1:4) after racking out joints including watering & curing etc complete with cost, conveyance royalties & taxes of all materials & all labour with T & P required for the work etc. all complete in all respect as per the Direction of the Engineer-in-Charge.	Sqm	221.21	329.51	72892.00
14	16mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	588.45	224.92	132353.00
15	Priming 1 coat with any approved Primer for Plaster Surface complete as per the direction of the Engineer-in-Charge.	Sqm	1260.45	66.79	84189.00
16	Painting two coats over a coat of primer to MS Grill Gate complete as per the direction of the Engineer-in-Charge.	Sqm	25.50	218.97	5585.00
17	Wall painting 2 coats with Weather coat paint of approved shade on new work to give an even shade including cost of paint complete as per the direction of the Engineer-in-Charge.	Sqm	1260.45	113.25	142752.00
18	Painting two coats with weather coat over a coat of primer including all cost complete as per the direction of the Engineer-in-Charge.	Sqm	221.21	180.05	39828.00
19	Suppling and fixing MS Grill Gate including cost conveyance taxes etc. complete as per the direction of the Engineer-in-Charge.	Kg	225.00	155.96	35091.00
20	Providing Press-cast M-35 grade intrerlocking Paver Block of 60mm thick with appropriate colour combination with transportation to the site complete and supplying all labour ,T&P for laying of Pre-cast M-35 grade interlocking 60mm thick Concrete Paver Blocks of standard size ,shape and colour over sand bed of required thickness and compaction with compactor - cum- vibrator machine to proper secreting I, e. Zero on Zero for complete laying area in 8-stage process as	Sqm	625.00	1025.57	640979.00
21	GI square tube section wrought and put up at truss and purlin including febrication and eraction with all complete as per direction of ETC	Kg	811.47	165.59	134370.00
22	Supplying and fixing Colour G.C.I sheeat on roof drilling hole in wind ties including fixing of ridges valley etc excluding cost of fittings complete as per the direction of the Engineer-in-Charge.	Sqm	33.12	563.90	18676.00

23	Labour for fixing of G.C.I. Sheet in roof drilling hole in wind ties including fixing of ridges valleys wind ties etc. including cost of fitting complete as per the direction of the Engineer-in-Charge	Sqm	28.80	178.91	5153.00
24	Suppling and fixing of precast chair with all labour and material	No	44.00	4000.00	176000.00
25	2.5cm thick A.S.flooring with c.c(1:2:4)using 12mm size cbhg chips including cost,conveyance,royalty,taxes etc all complete as per the direction of the Engineer-in-Charge	Sqm	13.80	347.98	4802.00
26	Supplying and placing of concrete well rings	No	10.00	800.00	8000.00
27	Concrete cover	No	2.00	400.00	800.00
28	Volyball net	No	1.00	1500.00	1500.00
29	Cost of grass seed				4566.00
30	Cost of Brick Masonry Display Board of 5'0"× 0'10"× 5'0" size to be erected at worksite with colouring and painting writing with logo complete as per the direction of the Engineer-in-Charge	No	1.00	4237.00	4237.00
Total Rs					4015294.00
or Say					4015294.00

Total 30 (Thirty) no of item only.

N.B.- GST-18% will be added at the time of Agreement over the quoted amount.

Approved for 30(Thirty) items only

  
Asst. Ext. Engineer  
Telkoi Block.

  
Block Development Officer  
Telkoi.

  
Addl. Executive Officer(Technical)  
Zilla Parishad, Keonjhar

**TO BE FILLED BY THE TENDERER**

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

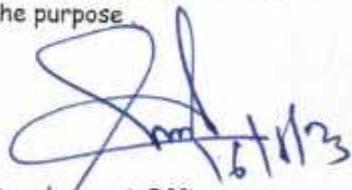
Excess in Percentage

Less in Percentage

in Figure	In words
%	
%	
%	

**Notes:-**

- 1) The Tenderer should quote the percentage up to two decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before te
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose.
- 4) The percentage quoted at any other place will not be taken into consideration.

  
Block Development Officer  
Telkoi.

**BILL OF QUANTITY (BOQ)**

N/W- Construction of Khela Padia at Kaliahata

Amount put to Tender :- Rs 4704364.00

Cost of Tender Paper :- Rs 6000.00

Class of Contractor :- 'B' Class only

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	2	3	4	5	6
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer-in-Charge.	Cum	357.06	210.37	75114.00
2	Earth work excavation in hard soil/ Gravelly soil by manual means from 1.5 upto 3m as direction of EIC	Cum	1.91	227.06	433.00
3	Excavation,loading,unloading and carriage by mechanical means of all kinds of soil including stoney earth, gravel and moorum etc. interspread with boulders upto 1/2 cum size all lifts and delifts including trimming of slopes and bed to design section and depositing the excavated materials away from work site as per the specification and as directed by the E.I.C within initial lead of 3 km from the place of excavation etc. complete.	Cum	3570.00	125.30	447321.00
4	Filling foundation & plinth with coarse sand well watered and rammed as per the direction of Engineer in charge etc complete as per the direction of the Engineer-in-Charge.	Cum	202.26	559.04	113071.00
5	C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.	Cum	29.67	6141.52	182204.00
6	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in foundation and plinth including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	84.96	5613.42	476938.00
7	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in Superstructure including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	107.97	5651.75	610224.00
8	Honey comb masonry with 25cm x12cm x8cm size Fly ash bricks havingcrushing strengthnot less than 75 kg/cm <sup>2</sup> in cement mortrar (1:4) and plastered with 16mm, thick cement mortar (1:6) including white washing 2 coats	Sqm	170.78	1375.62	234922.00
9	R.C.C M-20 using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.				
	A- Column Base	Cum	1.73	6693.95	11567.00
	B- Plinth beam	Cum	15.98	7515.47	120060.00

10	Plain Cement Concrete of M-15 grade using 20 mm and down size hard crusher broken granite stone chips of approved quality & from approved quarry including lowering, laying the concrete, watering and curing etc. complete to required levels laid in layers including cost, conveyance, royalties & taxes of all materials & cost of all labour with T & P required for the work etc all complete in all respect as per Direction of the Engineer in charge .	Cum	33.59	12459.07	418440.00
11	Supplying, fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification including, cutting, bending and tying etc all complete as per the direction of the Engineer-in-Charge.	Qntl	15.98	9239.70	147605.00
12	12mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	724.50	158.72	114994.00
13	12mm thick cement plaster (1:4) after racking out joints including watering & curing etc complete with cost, conveyance royalties & taxes of all materials & all labour with T & P required for the work etc. all complete in all respect as per the Direction of the Engineer in charge	Sqm	262.49	329.51	86492.00
14	16mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	633.45	224.92	142474.00
15	Priming 1 coat with any approved Primer for Plaster Surface	Sqm	1357.95	66.79	90701.00
16	Painting two coats over a coat of primer to MS Grill Gate	Sqm	25.50	218.97	5585.00
17	Wall painting 2 coats with Weather coat paint of approved shade on new work to give an even shade including cost of paint complete as per the direction of the Engineer-in-Charge.	Sqm	1357.95	113.25	153795.00
18	Painting two coats with weather coat over a coat of primer including all cost.	Sqm	262.49	180.05	47260.00
19	Suppling and fixing MS Grill Gate including cost conveyance taxes etc....	Kg	225.00	155.96	35091.00
20	Providing Press-cast M-35grade intrerlocking Paver Block of 60mm thick with appropriate colour combination with transportation to the site complete.and supplying all labour , T&P for laying of Pre-cast M-35 grade interlocking 60mm thick Concrete Paver Blocks of standard size ,shape and colour over sand bed of reqired thickness and compaction with compactor - cum- vibrator machine to proper secreting I, e. Zero on Zero for complete laying area in 8-stage process as directed by Enqq-in-charge.	Sqm	748.83	1025.57	767969.00
21	GI square tube section wrought and put up at truss and purlin including febrication and eraction with all complete as per direction of EIC.	Kg	811.47	165.59	134370.00
22	Supplying and fixing Colour G.C.I sheet on roof drilling hole in wind ties including fixing of ridges valley etc excluding cost of fittings.	Sqm	33.12	563.90	18676.00

23	Labour for fixing of G.C.I. Sheet in roof drilling hole in wind ties including fixing of ridges valleys wind ties etc. excluding cost of fitting.	Sqm	28.80	178.91	5153.00
24	Suppling and fixing of precast chair with all labour and material	No	60.00	4000.00	240000.00
25	2.5cm thick A.S.flooring with c.c(1:2:4)using 12mm size cbhg chips including cost,conveyance,royalty,taxes etc all complete.	Sqm	13.80	347.98	4802.00
26	Supplying and placing of concrete well rings	No	10.00	800.00	8000.00
27	Concrete cover	No	2.00	400.00	800.00
28	Volyball net	No	1.00	1500.00	1500.00
29	Cost of grass seed				4566.00
30	Cost of Brick Masonry Display Board of 5'0"x 0'10"x 5'0" size to be erected at worksite with colouring and painting writing with logo complete as per the direction of the Engineer-in-Charge.	No	1.00	4237.00	4237.00
				Total Rs	4704364.00
				or Say	4704364.00

Total 30 (Thirty) no of item only.

GST-18% will be added at the time of Agreement over the quoted amount.

Approved for 30(Thirty) items only

  
Asst.Exe. Engineer  
Telkoi Block.

  
Block Development Officer  
Telkoi.

  
Addl. Executive Officer(Technical)  
Zilla Parishad, Keonjhar

**TO BE FILLED BY THE TENDERER**

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

Excess in Percentage

Less in Percentage

in Figure	In words
%	
%	
%	

**Notes:-**

- 1) The Tenderer should quote the percentage up to **two decimal point** only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

  
Block Development Officer  
Telkoi.

BILL OF QUANTITY (BOQ)

N/W- Construction of Khela Padia at Kuladera of Khuntapada G.P.

Amount put to Tender :- Rs 3781982.00

Cost of Tender Paper :- Rs 6000.00

Class of Contractor :- C & B Class only

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	2	3	4	5	6
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer-in-Charge.	Cum	307.50	210.37	64688.00
2	Earth work excavation in hard soil/ Gravelly soil by manual means from 1.5 upto 3m as direction of EIC	Cum	1.91	227.06	433.00
3	Excavation,loading,unloading and carriage by mechanical means of all kinds of soil including stoney earth, gravel and moorum etc. interspread with boulders upto 1/2 cum size all lifts and delifts including trimming of slopes and bed to design section and depositing the excavated materials away from work site as per the specification and as directed by the E.I.C within initial lead of 3 km from the place of excavation etc. complete as per the direction of the Engineer-in-Charge.	Cum	1670.34	125.30	209293.00
4	Filling foundation & plinth with coarse sand well watered and rammed as per the direction of Engineer in charge etc complete as per the direction of the Engineer-in-Charge.	Cum	182.26	559.04	101892.00
5	C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.	Cum	24.53	6141.52	150643.00
6	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in foundation and plinth including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	70.94	5613.42	398220.00
7	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in Superstructure including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	89.18	5651.75	504003.00
8	Honey comb masonry with 25cm x12cm x8cm size Fly ash bricks havingcrushing strengthnot less than 75 kg/cm <sup>2</sup> in cement mortrar (1:4) and plastered with 16mm, thick cement mortar (1:6) including white washing 2 coats complete as per the direction of the Engineer-in-Charge.	Sqm	141.08	1375.62	194066.00
9	R.C.C M-20 using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.				
	A- Column Base	Cum	1.73	6693.95	11567.00
	B- Plinth beam	Cum	13.28	7515.47	99768.00



10	Plain Cement Concrete of M-15 grade using 20 mm and down size hard crusher broken granite stone chips of approved quality & from approved quarry including lowering, laying the concrete, watering and curing etc. complete to required levels laid in layers including cost, conveyance, royalties & taxes of all materials & cost of all labour with T & P required for the work etc all complete in all respect as per Direction of the Engineer-in-Charge .	Cum	28.63	12459.07	356730.00
11	Supplying,fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification including,cutting,bending and tying etc all complete as per the direction of the Engineer-in-Charge.	Qntl	13.28	9239.70	122657.00
12	12mm thick cement plaster in c.m (1:6) over brick or stone work including cost,conveyance,royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	598.50	158.72	94995.00
13	12mm thick cement plaster (1:4) after racking out joints including watering & curring etc complete with cost, conveyance royalties & taxes of all materials & all labour with T & P required for the work etc. all complete in all respect as per the direction of the Engineer-in-Charge.	Sqm	221.21	329.51	72892.00
14	16mm thick cement plaster in c.m (1:6) over brick or stone work including cost,conveyance,royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	525.45	224.92	118183.00
15	Priming 1 coat with any approved Primer for Plaster Surface	Sqm	1123.95	66.79	75072.00
16	Painting two coats over a coat of primer to MS Grill Gate	Sqm	25.50	218.97	5585.00
17	Wall painting 2 coats with Weather coat paint of approved shade on new work to give an even shade including cost of paint complete as per the direction of the Engineer-in-Charge.	Sqm	1123.95	113.25	127293.00
18	Painting two coats with whether coat over a coat of primer including all cost.	Sqm	221.21	180.05	39828.00
19	Suppling and fixing MS Grill Gate including cost conveyance taxes etc....	Kg	225.00	155.96	35091.00
20	Providing Press-cast M-35grade intrerlocking Paver Block of 60mm thick with appropriate colour combination with transportation to the site complete.and supplying all labour ,T&P for laying of Pre-cast M-35 grade interlocking 60mm thick Concrete Paver Blocks of standard size ,shape and colour over sand bed of reqired thickness and compaction with compactor - cum- vibrator machine to proper secreting I, e. Zero on Zero for complete laying area in 8-stage process as directed by Engg-in-Charge.	Sqm	625.00	1025.57	640979.00
21	GI square tube section wrought and put up at truss and purlin including febrication and eraction with all complete as per direction of EIC.	Kg	811.47	165.59	134370.00
22	Supplying and fixing Colour G.C.I sheet on roof drilling hole in wind ties including fixing of ridges valley etc excluding cost of fittings complete as per the direction of the Engineer-in-Charge.	Sqm	33.12	563.90	18676.00

23	Labour for fixing of G.C.I. Sheet in roof drilling hole in wind ties including fixing of ridges valleys wind ties etc. including cost of fitting complete as per the direction of the Engineer-in-Charge.	Sqm	28.80	178.91	5153.00
24	Suppling and fixing of precast chair with all labour and material	No	44.00	4000.00	176000.00
25	2.5cm thick A.S.flooring with c.c(1:2:4)using 12mm size cbhg chips including cost,conveyance,royalty,taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	13.80	347.98	4802.00
26	Supplying and placing of concrete well rings	No	10.00	800.00	8000.00
27	Concrete cover	No	2.00	400.00	800.00
28	Volyball net	No	1.00	1500.00	1500.00
29	Cost of grass seed				4566.00
30	Cost of Brick Masonry Display Board of 5'0"× 0'10"× 5'0" size to be erected at worksite with colouring and painting writing with logo complete as per the direction of the Engineer-in-Charge.	No	1.00	4237.00	4237.00
				Total Rs	3781982.00
				or Say	3781982.00

Total 30 (Thirty) no of item only.

N.B.- GST-18% will be added at the time of Agreement over the quoted amount.

Approved for 30(Thirty) items only

  
Asst. Exe. Engineer  
Telkoi Block.

  
Block Development Officer  
Telkoi.

  
Addl. Executive Officer(Technical)  
Zilla Parishad, Keonjhar

**TO BE FILLED BY THE TENDERER**

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

Excess in Percentage

Less in Percentage

in Figure	In words
%	
%	
%	

**Notes:-**

- 1) The Tenderer should quote the percentage up to **two decimal point** only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

  
Block Development Officer  
Telkoi.

BILL OF QUANTITY (BOQ)

N/W- Construction of Khela Padia at Podanga

Amount put to Tender :- Rs 3729317.00

Cost of Tender Paper :- Rs 6000.00

Class of Contractor :- C & B Class only

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	2	3	4	5	6
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer-in-Charge.	Cum	302.74	210.37	63687.00
2	Earth work excavation in hard soil/ Gravelly soil by manual means from 1.5 upto 3m as direction of EIC	Cum	1.91	227.06	433.00
3	Excavation,loading,unloading and carriage by mechanical means of all kinds of soil including stoney earth, gravel and moorum etc. interspread with boulders upto 1/2 cum size all lifts and delifts including trimming of slopes and bed to design section and depositing the excavated materials away from work site as per the specification and as directed by the E.I.C within initial lead of 3 km from the place of excavation etc. complete as per the direction of	Cum	1670.34	125.30	209293.00
4	Filling foundation & plinth with coarse sand well watered and rammed as per the direction of Engineer in charge etc complete as per the direction of the Engineer-in-Charge.	Cum	181.61	559.04	101526.00
5	C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.	Cum	23.87	6141.52	146619.00
6	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+-2percent in cement mortar(1:6) in foundation and plinth including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	69.14	5613.42	388100.00
7	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+-2percent in cement mortar(1:6) in Superstructure including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	86.74	5651.75	490242.00
8	Honey comb masonry with 25cm x12cm x8cm size Fly ash bricks havingcrushing strengthnot less than 75 kg/cm <sup>2</sup> in cement mortrar (1:4) and plastered with 16mm, thick cement mortar (1:6) including white washing 2 coats complete as per the direction of the Engineer-in-Charge.	Sqm	137.36	1375.62	188959.00
9	R.C.C M-20 using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.				
	A- Column Base	Cum	1.73	6693.95	11567.00
	B- Plinth beam	Cum	12.90	7515.47	96950.00

10	Plain Cement Concrete of M-15 grade using 20 mm and down size hard crusher broken granite stone chips of approved quality & from approved quarry including lowering, laying the concrete, watering and curing etc. complete to required levels laid in layers including cost, conveyance, royalties & taxes of all materials & cost of all labour with T & P required for the work etc all complete in all respect as per direction of the Engineer-in -Charge .	Cum	28.63	12459.07	356730.00
11	Supplying,fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification including,cutting,bending and tying etc all complete as per the direction of the Engineer-in-Charge.	Qntl	12.90	9239.70	119193.00
12	12mm thick cement plaster in c.m (1:6) over brick or stone work including cost,conveyance,royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	581.00	158.72	92217.00
13	12mm thick cement plaster (1:4) after racking out joints including watering & curring etc complete with cost, conveyance royalties & taxes of all materials & all labour with T & P required for the work etc. all complete in all respect as per the Direction of the Engineer-in-Charge.	Sqm	221.21	329.51	72892.00
14	16mm thick cement plaster in c.m (1:6) over brick or stone work including cost,conveyance,royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	510.45	224.92	114809.00
15	Priming 1 coat with any approved Primer for Plaster Surface	Sqm	1091.45	66.79	72901.00
16	Painting two coats over a coat of primer to MS Grill Gate	Sqm	25.50	218.97	5585.00
17	Wall painting 2 coats with Weather coat paint of approved shade on new work to give an even shade including cost of paint complete as per the direction of the Engineer-in-Charge.	Sqm	1091.45	113.25	123612.00
18	Painting two coats with whether coat over a coat of primer including all cost.	Sqm	221.21	180.05	39828.00
19	Suppling and fixing MS Grill Gate including cost conveyance taxes etc....	Kg	225.00	155.96	35091.00
20	Providing Press-cast M-35grade intrerlocking Paver Block of 60mm thick with appropriate colour combination with transportation to the site complete.and supplying all labour ,T&P for laying of Pre-cast M-35 grade interlocking 60mm thick Concrete Paver Blocks of standard size ,shape and colour over sand bed of required thickness and compaction with compactor - cum- vibrator machine to proper secreting I, e. Zero on Zero for complete laying area in 8-stage process as directed by Engg-in-Charge.	Sqm	625.00	1025.57	640979.00
21	GI square tube section wrought and put up at truss and purlin including febrication and eraction with all complete as per direction of EIC.	Kg	811.47	165.59	134370.00
22	Supplying and fixing Colour G.C.I sheet on roof drilling hole in wind ties including fixing of ridges valley etc excluding cost of fittings complete as per the direction of the Engineer-in-Charge.	Sqm	33.12	563.90	18676.00

23	Labour for fixing of G.C.I. Sheet in roof drilling hole in wind ties including fixing of ridges valleys wind ties etc. including cost of fitting as per the direction of the Engineer-in-Charge.	Sqm	28.80	178.91	5153.00
24	Suppling and fixing of precast chair with all labour and material	No	44.00	4000.00	176000.00
25	2.5cm thick A.S.flooring with c.c(1:2:4)using 12mm size cbhg chips including cost,conveyance,royalty,taxes etc all complete.	Sqm	13.80	347.98	4802.00
26	Supplying and placing of concrete well rings	No	10.00	800.00	8000.00
27	Concrete cover	No	2.00	400.00	800.00
28	Volyball net	No	1.00	1500.00	1500.00
29	Cost of grass seed				4566.00
30	Cost of Brick Masonry Display Board of 5'0"× 0'10"× 5'0" size to be erected at worksite with colouring and painting writing with logo complete as per the direction of the Engineer-in-Charge.	No	1.00	4237.00	4237.00
				Total Rs	3729317.00

or Say 3729317.00


Total 30 (Thirty) no of item only.

N.B.- GST-18% will be added at the time of Agreement over the quoted amount.

Approved for 30(Thirty) items only

  
Asst. Exe. Engineer  
Telkoi Block.

  
Block Development Officer  
Telkoi.

  
Addl. Executive Officer(Technical)  
Zilla Parishad, Keonjhar

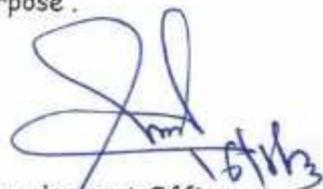
**TO BE FILLED BY THE TENDERER**

1) My/ Our quoted rate is (both in figure and words)

in Figure	In words
Equal to Estimate Cost	%
Excess in Percentage	%
Less in Percentage	%

**Notes:-**

- 1) The Tenderer should quote the percentage up to two decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tender.
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose.
- 4) The percentage quoted at any other place will not be taken into consideration.

  
Block Development Officer  
Telkoi.

BILL OF QUANTITY (BOQ)

N/W- Construction of Khela Padia at Sinduria School Field of Karamangi G.P.

Amount put to Tender :- Rs 3597254.00

Cost of Tender Paper :- Rs 6000.00

Class of Contractor :- C & B Class only

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	2	3	4	5	6
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer-in-Charge.	Cum	290.55	210.37	61123.00
2	Earth work excavation in hard soil/ Gravelly soil by manual means from 1.5 upto 3m as direction of EIC	Cum	1.91	227.06	433.00
3	Excavation,loading,unloading and carriage by mechanical means of all kinds of soil including stoney earth, gravel and moorum etc. interspread with boulders upto 1/2 cum size all lifts and delifts including trimming of slopes and bed to design section and depositing the excavated materials away from work site as per the specification and as directed by the E.I.C within initial lead of 3 km from the place of excavation etc. complete as per the direction of the Engineer-in-Charge.	Cum	1670.34	125.30	209292.00
4	Filling foundation & plinth with coarse sand well watered and rammed as per the direction of Engineer in charge etc complete as per the direction of the Engineer-in-Charge.	Cum	179.92	559.04	100581.00
5	C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.	Cum	22.18	6141.52	136238.00
6	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in foundation and plinth including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	64.55	5613.42	362358.00
7	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in Superstructure including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	80.56	5651.75	455318.00
8	Honey comb masonry with 25cm x12cm x8cm size Fly ash bricks havingcrushing strengthnot less than 75 kg/cm <sup>2</sup> in cement mortrar (1:4) and plastered with 16mm, thick cement mortar (1:6) including white washing 2 coats complete as per the direction of the Engineer-in-Charge.	Sqm	127.46	1375.62	175340.00
9	R.C.C M-20 using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.				
	A- Column Base	Cum	1.73	6693.95	11567.00
	B- Plinth beam	Cum	12.00	7515.47	90186.00

10	Plain Cement Concrete of M-15 grade using 20 mm and down size hard crusher broken granite stone chips of approved quality & from approved quarry including lowering, laying the concrete, watering and curing etc. complete to required levels laid in layers including cost, conveyance, royalties & taxes of all materials & cost of all labour with T & P required for the work etc all complete in all respect as per Direction of the Engineer	Cum	28.63	12459.07	356730.00
11	Supplying, fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification including, cutting, bending and tying etc all complete as per the direction of the Engineer-in-Charge.	Qntl	12.00	9239.70	110877.00
12	12mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	539.00	158.72	85551.00
13	12mm thick cement plaster (1:4) after racking out joints including watering & curing etc complete with cost, conveyance royalties & taxes of all materials & all labour with T & P required for the work etc. all complete in all respect as per the direction of the Engineer-in-Charge.	Sqm	221.21	329.51	72892.00
14	16mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	474.45	224.92	106712.00
15	Priming 1 coat with any approved Primer for Plaster Surface	Sqm	1013.45	66.79	67691.00
16	Painting two coats over a coat of primer to MS Grill Gate	Sqm	25.50	218.97	5585.00
17	Wall painting 2 coats with Weather coat paint of approved shade on new work to give an even shade including cost of paint complete as per the direction of the Engineer-in-Charge.	Sqm	1013.45	113.25	114778.00
18	Painting two coats with weather coat over a coat of primer including all cost.	Sqm	221.21	180.05	39828.00
19	Suppling and fixing MS Grill Gate including cost conveyance taxes etc....	Kg	225.00	155.96	35091.00
20	Providing Press-cast M-35grade intrerlocking Paver Block of 60mm thick with appropriate colour combination with transportation to the site complete and supplying all labour T&P for laying of Pre-cast M-35 grade interlocking 60mm thick Concrete Paver Blocks of standard size ,shape and colour over sand bed of required thickness and compaction with compactor - cum- vibrater machine to proper secreting I, e. Zero on Zero for complete laying area in 8-stage process as	Sqm	625.00	1025.57	640979.00
21	GI square tube section wrought and put up at truss and purlin including febrication and eraction with all complete as per direction of EIC.	Kg	811.47	165.59	134370.00
22	Supplying and fixing Colour G.C.I sheet on roof drilling hole in wind ties including fixing of ridges valley etc excluding cost of fittings.	Sqm	33.12	563.90	18676.00

23	Labour for fixing of G.C.I. Sheet in roof drilling hole in wind ties including fixing of ridges valleys wind ties etc. including cost of fitting complete as per the direction of the Engineer-in-Charge	Sqm	28.80	178.91	5153.00
24	Suppling and fixing of precast chair with all labour and material	No	44.00	4000.00	176000.00
25	2.5cm thick A.S.flooring with c.c(1:2:4)using 12mm size cbhg chips including cost,conveyance,royalty,taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	13.80	347.98	4802.00
26	Supplying and placing of concrete well rings	No	10.00	800.00	8000.00
27	Concrete cover	No	2.00	400.00	800.00
28	Volyball net	No	1.00	1500.00	1500.00
29	Cost of grass seed				4566.00
30	Cost of Brick Masonry Display Board of 5'0"× 0'10"× 5'0" size to be erected at worksite with colouring and painting writing with logo complete as per the direction of the Engineer-in-Charge.	No	1.00	4237.00	4237.00
				Total Rs	3597254.00

or Say 3597254.00

Total 30 (Thirty) no of item only.

N.B.-GST-18% will be added at the time of Agreement over the quoted amount.

Approved for 30(Thirty) items only

  
Asst. Exe. Engineer  
Telkoi Block.

  
Block Development Officer  
Telkoi.

  
Addl. Executive Officer(Technical)  
Zilla Parishad, Keonjhar

TO BE FILLED BY THE TENDERER

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

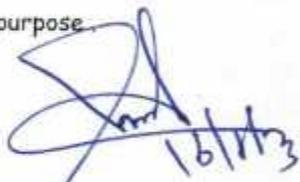
Excess in Percentage

Less in Percentage

In Figure	In words
%	
%	
%	

Notes:-

- 1) The Tenderer should quote the percentage up to two decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before t
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose.
- 4) The percentage quoted at any other place will not be taken into consideration.

  
Block Development Officer  
Telkoi.

**BILL OF QUANTITY (BOQ)**

N/W- Construction of Khela Padia at Saleikena

Amount put to Tender :- Rs 3983753.00

Cost of Tender Paper :- Rs 6000.00

Class of Contractor :- C & B Class only

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	2	3	4	5	6
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer-in-Charge.	Cum	324.45	210.37	68254.00
2	Earth work excavation in hard soil/ Gravelly soil by manual means from 1.5 upto 3m as direction of EIC	Cum	1.91	227.06	433.00
3	Excavation,loading,unloading and carriage by mechanical means of all kinds of soil including stoney earth, gravel and moorum etc. interspread with boulders upto 1/2 cum size all lifts and delifts including trimming of slopes and bed to design section and depositing the excavated materials away from work site as per the specification and as directed by the E.I.C within initial lead of 3 km from the place of excavation etc. complete.	Cum	1670.34	125.30	209293.00
4	Filling foundation & plinth with coarse sand well watered and rammed as per the direction of Engineer in charge etc complete as per the direction of the Engineer-in-Charge.	Cum	184.61	559.04	103203.00
5	C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.	Cum	26.87	5868.71	157716.00
6	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in foundation and plinth including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	77.33	5770.02	446191.00
7	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+- 2percent in cement mortar(1:6) in Superstructure including cost,conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	97.72	5808.35	567567.00
8	Honey comb masonry with 25cm x12cm x8cm size Fly ash bricks havingcrushing strengthnot less than 75 kg/cm <sup>2</sup> in cement mortar (1:4) and plastered with 16mm, thick cement mortar (1:6) including white washing 2 coats	Sqm	154.69	1405.23	217372.00
9	R.C.C M-20 using 12mm H.G.C.B chips including centering & shuttering cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.				
	A- Column Base	Cum	1.73	6459.80	11163.00
	B- Plinth beam	Cum	14.48	7281.32	105397.00




10	Plain Cement Concrete of M-15 grade using 20 mm and down size hard crusher broken granite stone chips of approved quality & from approved quarry including lowering, laying the concrete, watering and curing etc. complete to required levels laid in layers including cost, conveyance, royalties & taxes of all materials & cost of all labour with T & P required for the work etc all complete in all respect as per Direction of the Engineer in charge .	Cum	28.63	12195.46	349182.00
11	Supplying,fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification including,cutting,bending and tying etc all complete as per the direction of the Engineer-in-Charge.	Qntl	14.48	9227.09	133563.00
12	12mm thick cement plaster in c.m (1:6) over brick or stone work including cost,conveyance,royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	654.50	160.38	104970.00
13	12mm thick cement plaster (1:4) after racking out joints including watering & curring etc complete with cost, conveyance royalties & taxes of all materials & all labour with T & P required for the work etc. all complete in all respect as per the Direction of the Engineer in charge	Sqm	221.21	349.65	77345.00
14	16mm thick cement plaster in c.m (1:6) over brick or stone work including cost,conveyance,royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	573.45	226.91	130122.00
15	Priming 1 coat with any approved Primer for Plaster Surface	Sqm	1227.95	66.79	82018.00
16	Painting two coats over a coat of primer to MS Grill Gate	Sqm	25.50	218.97	5585.00
17	Wall painting 2 coats with Weather coat paint of approved shade on new work to give an even shade including cost of paint complete as per the direction of the Engineer-in-Charge.	Sqm	1227.95	113.25	139071.00
18	Painting two coats with whether coat over a coat of primer including all cost.	Sqm	221.21	180.05	39828.00
19	Suppling and fixing MS Grill Gate including cost conveyance taxes etc....	Kg	225.00	155.96	35091.00
20	Providing Press-cast M-35grade intrerlocking Paver Block of 60mm thick with appropriate colour combination with transportation to the site complete.and supplying all labour ,T&P for laying of Pre-cast M-35 grade interlocking 60mm thick Concrete Paver Blocks of standard size ,shape and colour over sand bed of reqired thickness and compaction with compactor - cum- vibrator machine to proper secreting i. e. Zero on Zero for complete laying area in 8-stage process as directed by Engg-in-charge.	Sqm	625.00	1027.97	642479.00
21	GI square tube section wrought and put up at truss and purlin including febrication and eraction with all complete as per direction of EIC.	Kg	811.47	165.47	134273.00
22	Supplying and fixing Colour G.C.I sheet on roof drilling hole in wind ties including fixing of ridges valley etc excluding cost of fittings.	Sqm	33.12	563.90	18676.00

23	Labour for fixing of G.C.I. Sheet in roof drilling hole in wind ties including fixing of ridges valleys wind ties etc. excluding cost of fitting.	Sqm	28.80	178.91	5153.00
24	Suppling and fixing of precast chair with all labour and material	No	44.00	4000.00	176000.00
25	2.5cm thick A.S.flooring with c.c(1:2:4)using 12mm size cbhg chips including cost,conveyance,royalty,taxes etc all complete.	Sqm	13.80	341.15	4708.00
26	Supplying and placing of concrete well rings	No	10.00	800.00	8000.00
27	Concrete cover	No	2.00	400.00	800.00
28	Volyball net	No	1.00	1500.00	1500.00
29	Cost of grass seed				4563.00
30	Cost of Brick Masonry Display Board of 5'0"× 0'10"× 5'0" size to be erected at worksite with colouring and painting writing with logo complete as per the direction of the Engineer-in-Charge.	No	1.00	4237.00	4237.00
				Total Rs	3983753.00
				or Say	3983753.00


Total 30 (Thirty) no of item only.

GST-18% will be added at the time of Agreement over the quoted amount.

Approved for 30(Thirty) items only

  
Asst. Exe. Engineer  
Telkoi Block.

  
Block Development Officer  
Telkoi.

  
Addl. Executive Officer(Technical)  
Zilla Parishad, Keonjhar

**TO BE FILLED BY THE TENDERER**

1) My/ Our quoted rate is (both in figure and words)

Equal to Estimate Cost

Excess in Percentage

Less in Percentage

in Figure	In words
%	
%	
%	

**Notes:-**

- 1) The Tenderer should quote the percentage up to **two decimal point** only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

  
Block Development Officer  
Telkoi.

BILL OF QUANTITY (BOQ)

N/W:- Construction of Addl. Class Room-2nos of Govt. Vocational HSS., Telkoi.

Amount put to Tender:- Rs 2052239.00

Cost of Tender Paper:- Rs 6000.00

Class of Contractor:- C & B Class only

Sl.No.	Item of Work	Unit	Quantity	Rate	Amount
1	Earth work excavation in hard soil or gravel within 50 mtr initial lead & 1.5 mtr initial lift including rough dressing the trench etc complete as per the direction of the Engineer-in-Charge.	Cum	70.81	210.37	14896.00
2	Filling foundation & plinth with coarse sand well watered and rammed as per the direction of Engineer in charge etc complete as per the direction of the Engineer-in-Charge.	Cum	76.34	564.34	43082.00
3	C.C (1:3:6) in foundation and plinth using 40mm H.G.C.B metal including cost, conveyance, royalty etc complete as per the direction of the Engineer-in-Charge.	Cum	18.13	5907.26	107099.00
4	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+ 2percent in cement mortar(1:6) in foundation and plinth including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	22.13	5763.44	127545.00
5	Brick work with Fly ash bricks 25cm x 12cm x 8cm size having crushing strength not less than 75kg/cm <sup>2</sup> with dimension tolerance+ 2percent in cement mortar(1:6) in Superstructure including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Cum	30.87	5801.77	179101.00
6	RCC work of M -20 grade with 20mm and down grade black hard granite crusher broken chips including hoisting, cost, conveyance, royalty and taxes and including centring, shuttering etc all complete as per the direction of the Engineer-in-Charge.				
a)	Column base	Cum	14.59	6388.29	93205.00
b)	Plinth band	Cum	5.22	7209.81	37635.00
c)	Column:-	Cum	3.78	14070.11	53185.00
d)	Roof Beam	Cum	3.63	14070.11	51075.00
e)	Lintel	Cum	2.97	13434.71	39901.00
f)	Chajja	Sqm	17.28	1135.61	19623.00
g)	Roof Slab	Cum	16.65	12701.66	211483.00



7	Supplying, fitting and placing uncoated HYSD bar reinforcement complete as per drawing and technical specification including, cutting, bending and tying the grills etc all complete as per the direction of the Engineer-in-Charge.	Qntl	55.39	9214.48	510432.00
8	Suppling and fixing MS doors and windows cost conveyance taxes etc. complete as per the direction of the Engineer-in-Charge.	Kg	640.00	155.96	99814.00
9	16mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	184.55	226.49	41799.00
10	12mm thick cement plaster in c.m (1:6) over brick or stone work including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	209.20	160.03	33479.00
11	6mm thick cement plater in CM(1:4) to RCC surfaces finished smooth including closed deep chiping and slurry treatment as per the direction of the Engineer-in-Charge.	Sqm	58.37	163.43	9540.00
12	Fixing of Vetrified tiles in floors treads or steps and landing on 25mm thick of bed of cement mortar(1:1) jointed with neat cement slury mixed with pigments to match the shades of the tiles including rubbing and polishing complete as per the direction of the Engineer-in-Charge.	Sqm	118.74	1469.42	174479.00
13	Fixing Vetrified tiles in dados skirting and risers of of steps on 12mm thick cement plaster(1:3) jointed with neat cement slurry mixed wit pigments to match the shades of the tiles including rubbing and polishing complete including cost of tiles as per the direction of the Engineer-in-Charge.	Sqm	8.03	1587.64	12749.00
14	Fixing of Chequered tiles in floors treads or steps and landing on 25mm thick of bed of cement mortar(1:1) jointed with neat cement slury mixed with pigments to match the shades of the tiles including rubbing and polishing complete as per the direction of the Engineer-in-Charge.	Sqm	10.22	957.26	9783.00
15	Painting two coats of enamel paint to the door & window over a coat of primer as per the direction of the Engineer-in-Charge.	Sqm	46.40	218.97	10160.00
16	Finishing surface of walls with acrylic wall putty of approved make and finished smooth and even surface to receive painting including cost of all materials taxes, labour T & P etc complete as per the direction of the Engineer-in-Charge.	Sqm	291.44	142.72	41595.00
17	Priming one coat with any approved primer of wall primer over putty surface as per the direction of the Engineer-in-Charge.	Sqm	500.64	66.79	33439.00
18	Cement wash one coat over new plaster work outer side surface as per the direction of the Engineer-in-Charge.	Sqm	209.20	14.80	3096.00
19	Wall painting 2 coats with plastic emulsion paint of approved shade on new work to give an even shade including cost of paint as per the direction of the Engineer-in-Charge.	Sqm	291.44	91.97	26805.00


20	Supplying and applying of approved quality 2 coat wheather paint over outer side finishing area as per the direction of the Engineer-in-Charge.	Sqm	209.2	113.25	23693.00
21	20mm thick graded cement plaster in cement plaster(1:4) over roof slab including cost, conveyance, royalty and taxes etc all complete as per the direction of the Engineer-in-Charge.	Sqm	130.15	249.78	32509.00
22	Cost of Black board of (12'X4' size)	Nos	2	3000.00	6000.00
23	Cost of Skylight	Nos	8	100.00	800.00
24	Cost of Brick Masonry Display Board of 5'0" x 0'10" x 5'0" size to be erected at worksite with colouring and painting writing with logo complete as per the direction of the Engineer-in-Charge.	Nos	1	4237.00	4237.00
				Total	2052239.00

or Say 2052239.00


Total 24 (Twentyfour) no of item only.

N.B.- GST-18% will be added at the time of Agreement over the quoted amount.

Approved for 24 (Twentyfour) items only

  
Asst. Exe. Engineer  
Telkoi Block.

  
Block Development Officer,  
Telkoi.

  
Addl. Executive Officer (Technical)  
Zilla Parishad, Keonjhar

**TO BE FILLED BY THE TENDERER**

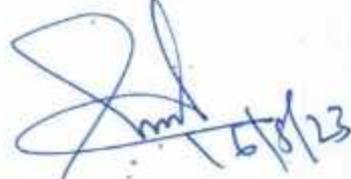
1) My/ Our quoted rate is (both in figure and words)

- Equal to Estimate Cost
- Excess in Percentage
- Less in Percentage

in Figure	In words
%	
%	
%	

**Notes:-**

- 1) The Tenderer should quote the percentage up to two decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before te
- 3) The Tenderers should quote their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

  
Block Development Officer  
Telkoi.