

**BOQ / TENDER SCHEDULE FOR " CONSTRUCTION OF ACR AT BANTALA PRIMARY SCHOOL OF MAREIGAON G.P
UNDER HATADIHI BLOCK OF KEONJHAR DIST**

TENDER SCHEDULE

S.No	Items	Unit	Qty	Rate in Rs/P	Amount in Rs/P
1	Earthwork excavation in hard soil within 50 mtr initial lead & 1.5 mtr lift including bed dressing, levelling etc complete as per the direction of Engineer in charge.	1cum	72.49	₹ 270.90	₹ 19,637.00
2	Filling (F&P) with sand well water rammed etc complete as per direction of Engineer in charge.	1cum	65.51	₹ 928.45	₹ 60,823.00
3	P.C.C. (1:3:6) using 40 mm size h.g. Metal including cost of materials, conveyance, royalty all labour etc complete as per the direction of Engineer in charge.	1cum	21.68	₹ 6,263.59	₹ 1,35,795.00
4	C.C.(1:2:4) with using 12mm.size h.b.g. metal complete.	1cum	4.80	₹ 7,795.67	₹ 37,419.00
5	R.C.C. M20- grade using 20mm & down graded h.g. C.b. Chips as per direction of Engineer in charge.		0.00		
i	Base & footings	1cum	12.27	₹ 6,702.97	₹ 82,245.00
ii	Grade beam / Plinth band	1cum	3.49	₹ 6,831.10	₹ 23,841.00
iii	Column & beam (G.F.)	1cum	5.54	₹ 15,845.94	₹ 87,787.00
iv	Lintel(G.F.)	1cum	1.01	₹ 14,315.94	₹ 14,459.00
v	Roof slab chajja(G.F)	1cum	7.87	₹ 13,808.95	₹ 1,08,676.00
6	Cost of steel including all & carriage including labour for cutting, bending & binding including cost of binding wire etc. as per direction of Engineer in charge (G.F.)	1Qntl	30.18	₹ 9,106.00	₹ 2,74,819.00
7	Fly ash Brick masonry in C.M. (1:6) for (F&P) including cost, conveyance, labour all complete in (F&P) quantity including as per direction of Engineer in charge.	1cum	7.36	₹ 5,656.75	₹ 41,634.00
8	Fly ash Brick masonry in C.M. (1:6) for Super Structure including cost, conveyance, labour all complete in as per direction of Engineer in charge.(GF)	1cum	15.50	₹ 5,689.75	₹ 88,191.00
9	6 mm thick cp in (1:4) cm over R.C.C. Surface including slurry treatment etc complete as per the direction of Engineer in charge.(G.F.)	1sqm	79.45	₹ 209.91	₹ 16,677.00
10	12 mm thick cp in (1:6) cm over brick work out side only including cost of materials, labour all complete as per the direction of Engineer in charge.(G.F.)	1sqm	87.19	₹ 189.31	₹ 16,506.00
11	16 mm thick cp in (1:6) cm over brick work in side side only including cost of materials, labour all complete as per the direction of Engineer in charge.(G.F.)	1sqm	86.49	₹ 272.47	₹ 23,566.00

gm

12	12 mm thick cp in (1:4) cm with cement punning & bitumen painting over brick work (plinth) only including cost of materials , labour all complete as per the direction of Engineer in charge.	1sqm	27.96	₹	209.18	₹	5,849.00
13	20 mm thick cp in (1:4) cm with cement plater for grading only including cost of materials , labour all complete as per the direction of Engineer in charge.(G.F.)	1sqm	63.00	₹	295.63	₹	18,625.00
14	2.5 cm thick D.P.C. In plith including cost of materials labour all complete as the direction of Engineer in charge	1sqm	9.17	₹	313.35	₹	2,873.00
15	Providing vetrified floor tile of size 600 mm x600mm over 20 mm thick cement mortar(1:4) of approved quality as per the direction of engineer in charge.(G.F)	1sqm	52.11	₹	1,263.23	₹	65,827.00
16	Providing floor tile of size 300 mm x300mm over 20 mm thick cement mortar(1:4) of approved quality as per the direction of engineer in charge.(G.F)	1sqm	13.19	₹	1,306.90	₹	17,238.00
17	Providing Glazed tile of size 300 mm x300mm over 12 mm thick cement mortar(1:3) for wall area of toilets of approved quality as per the direction of engineer in charge.(G.F.)	1sqm	4.63	₹	1,292.28	₹	5,983.00
18	Priming 1coat any approved primer with wall cement primer water bound with cost & labor etc complete.(G.F.)	1sqm	253.13	₹	78.21	₹	19,798.00
19	Providing two coat weather coat over plaster surface (out side wall) including cost of materials labour all complete as per the direction of Engineer in charge.(G.F.)	1sqm	135.54	₹	99.64	₹	13,505.00
20	Providing plastic emulison two coat over plaster surface (in side wall) including cost of materials labour all complete as per the direction of Engineer in charge.(G.F.)	1sqm	117.59	₹	107.559	₹	12,648.00
21	Providing water based outty two coat over plaster surface (in side wall) including cost of materials labour all complete as per the direction of Engineer in charge.(G.F.)	1sqm	117.59	₹	89.858	₹	10,566.00
22	Providing two coat enamel paint with one coat primer all complete. As per direction of Engineer in charge.(G.F.)	1sqm	21.92	₹	260.66	₹	5,714.00
23	Providing for stainless steel stair case hand railings eith 3nos horizontal bar with vertical circular pipe including cost of materials labour all complete as per direction of Engineer in charge.(G.F.)	1mtr	12.20	₹	3,592.04	₹	43,823.00

gk


24	Supply & fitting & fixing of Iron door & windows including cost , conveyance all complete (G F)	1kg	240.00	₹ 110.00	₹ 26,400.00
25	Supply & fitting & fixing of Iron grills for windows including cost , conveyance all complete(G F)	1kg	40.00	₹ 110.00	₹ 4,400.00
26	Rigid & Smooth centering for casting of mass concrete.	1Sqm	24.00	₹ 247.51	₹ 5,941.00


(Rupees twelve lakh ninety one thousand two hundred sixty five) only.

₹ 12,91,265.00


Tender value (Excluding G.S.T. 18%)

TOTAL 26 (Twenty six) NOS ITEM ONLY


Assistant Executive Engineer
Hatadihi Block


Block Development Officer
Hatadihi Block

Approved for 26 (Twenty six) items only


Addl. Executive Officer (Technical)
Zilla Parishad, Keonjhar

TO BE FILLED BY THE TENDERER

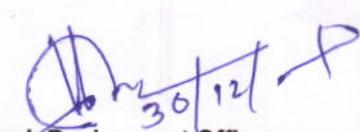
1) My/ Our quoted rate is (both in figure and words)

	in Figure	In words
Equal to Estimate Cost	%	
Excess in Percentage	%	
Less in Percentage	%	

Notes:-

- 1) The Tenderer should quote the percentage up to two decimal point only.
- 2) The Tenderer should go through the special conditions in the DTCN for percentage rate contract before tendering .
- 3) The Tenderers should quoted their percentage only inside the space provided for the purpose .
- 4) The percentage quoted at any other place will not be taken into consideration.

Addl. Executive Officer (Technical)
Zilla Parishad, Keonjhar


Block Development Officer
Hatadihi Block